# Epson Stylus Pro 4900 - IDEAlliance GRACoL coated1 2009 Report
## Demo Branch - CGS


## Date: 10/11/2010 - 1/11/2011

| Device Information | Result | Search Field | Operator | Criteria |
|---|---|---|---|---|
| No Of Reads | 12 | --- | --- | |
| Avg Delta E | 2.34 | --- | --- | |
| Avg Max Delta E | 6.97 | --- | --- | |
| Error Ratio | 41.67 | --- | --- | --- |


| Environmental | | | |
|---|---|---|---|
| | Average | Standarad | Min |
| Temp: | 0.00 | 0.00 | 0.00 |
| Rh: | 0.00 | 0.00 | 0.00 |

| Consumables SKU Information | | | |
|---|---|---|---|
| Paper Sku | Measurements | Error Ratio | Ave Delta E |
| PSMS200/24 | 12 | 41.67% | 02.34 |

| Consumables Stability | | | |
|---|---|---|---|
| Consumable | Ave Delta E | Ave Hue Delta | Ave L* Delta |
| Cyan | 2.86 | 1.87 | 1.04 |
| Magenta | 1.91 | 1.27 | 0.66 |
| Yellow | 4.17 | 0.88 | 0.37 |
| Black | 3.01 | 0.79 | 2.59 |
| Paper | 2.74 | 1.05 | 2.03 |

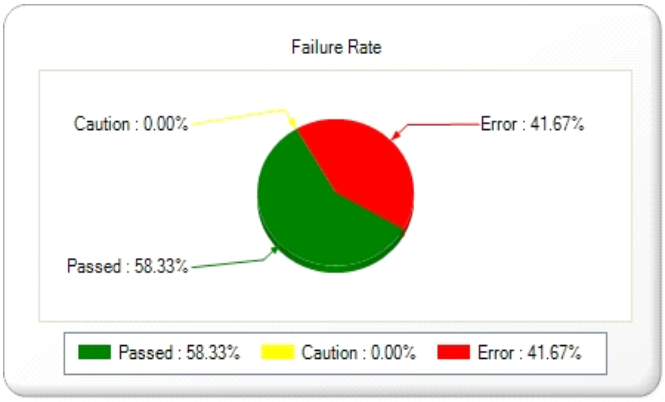


| Patches Detail | | | | | | | |
|---|---|---|---|---|---|---|---|
| Patch | C | M | Y | K | Color | Ave. DE | Std. DE |
| B23 | 25.00 | 19.00 | 19.00 | 0.00 | | 01.27 | 01.27 |
| B22 | 10.00 | 7.00 | 7.00 | 0.00 | | 01.35 | 01.34 |
| A12 | 0.00 | 0.00 | 30.00 | 0.00 | | 01.36 | 01.18 |
| B16 | 10.00 | 40.00 | 40.00 | 0.00 | | 01.47 | 01.35 |
| B12 | 30.00 | 0.00 | 30.00 | 0.00 | | 01.52 | 01.57 |
| A23 | 0.00 | 0.00 | 0.00 | 25.00 | | 01.58 | 01.27 |
| B14 | 0.00 | 100.00 | 40.00 | 0.00 | | 01.59 | 01.19 |
| B24 | 50.00 | 40.00 | 40.00 | 0.00 | | 01.61 | 01.71 |
| A8 | 0.00 | 30.00 | 0.00 | 0.00 | | 01.65 | 01.44 |
| B27 | 80.00 | 70.00 | 70.00 | 100.00 | | 01.68 | 00.81 |
| A22 | 0.00 | 0.00 | 0.00 | 10.00 | | 01.69 | 02.19 |
| A24 | 0.00 | 0.00 | 0.00 | 50.00 | | 01.70 | 02.11 |
| B8 | 0.00 | 30.00 | 30.00 | 0.00 | | 01.72 | 01.19 |
| B4 | 30.00 | 30.00 | 0.00 | 0.00 | | 01.80 | 01.87 |
| B1 | 100.00 | 100.00 | 0.00 | 60.00 | | 01.86 | 02.32 |

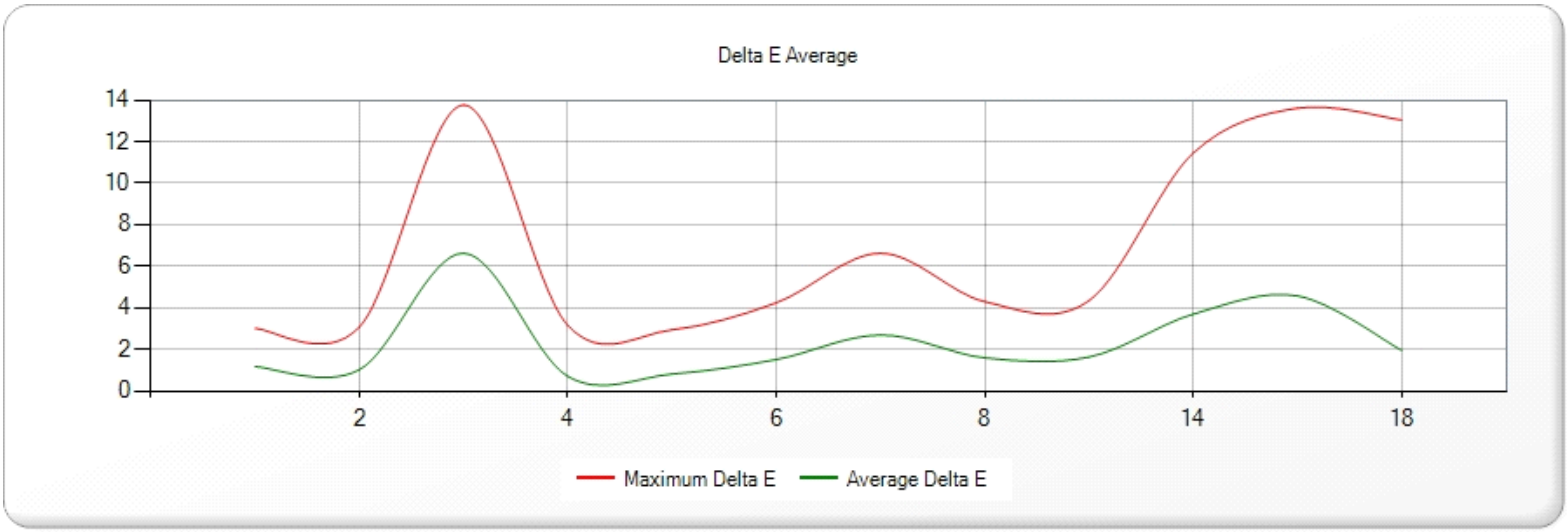



© CGS 2020