别名化样本：名称、型号及编号已替换；规则保留；示例型号不作为产品选型依据。

物料主数据质量控制单

适用品类：制造商A（集团A）设备A

编号：DOC-A-0001

编写/日期：人员A / 日期A

审查/日期：人员B / 日期A

批准/日期：人员C / 日期B

别名化样本：名称、型号及编号已替换；规则保留；示例型号不作为产品选型依据。

文件修改跟踪页
Revisions

版次 Rev.	作 者 Drafter	文 件 修 改 原 因 Reason of Revision	日 期 Date	修 改 页 Page
1	人员A	根据物料主数据质量控制管理需要，新编本文件。	日期C	全部

别名化样本：名称、型号及编号已替换；规则保留；示例型号不作为产品选型依据。

1. 适用范围

制造商A 设备A。

特别关注：集团A是集团，制造商A是其下属工厂。新备件标注制造商A，旧备件标注集团A。设备A、装置B、设备C和装置D等备件的制造商建议填写制造商A，或填写其集团公司名称集团A。

2. 概述

制造商A 设备A在行业A广泛使用，以型号为识别依据。型号各字符对应设备A的各类参数，详见选型表。

3. 编码必要性判断原则

制造商A 设备A即为最小单元，无零部件。设备A存在一定故障概率，需要编码。

4. 编码准确性、完整性和唯一性

4.1. 识别最小关键参数

最小关键参数为型号。同类设备外形相似，一般单凭实物照片无法准确识别；设备表面无型号信息时，照片需包含型号信息才能识别。

4.2. 唯一性判断依据


1. 完整的型号信息可唯一确定制造商A 设备A。
2. 或提供所有的参数信息（需根据选型表对应完整的参数），唯一确定设备A。

4.3. 其他重要关键参数

型号包含了表盘尺寸、安装方式、过程接口尺寸、测量精度、是否充油等参数信息。

若型号不全，需提供相应的参数信息，才能识别。

例如：设备B【FA1-C20.D11J/0001_0002】

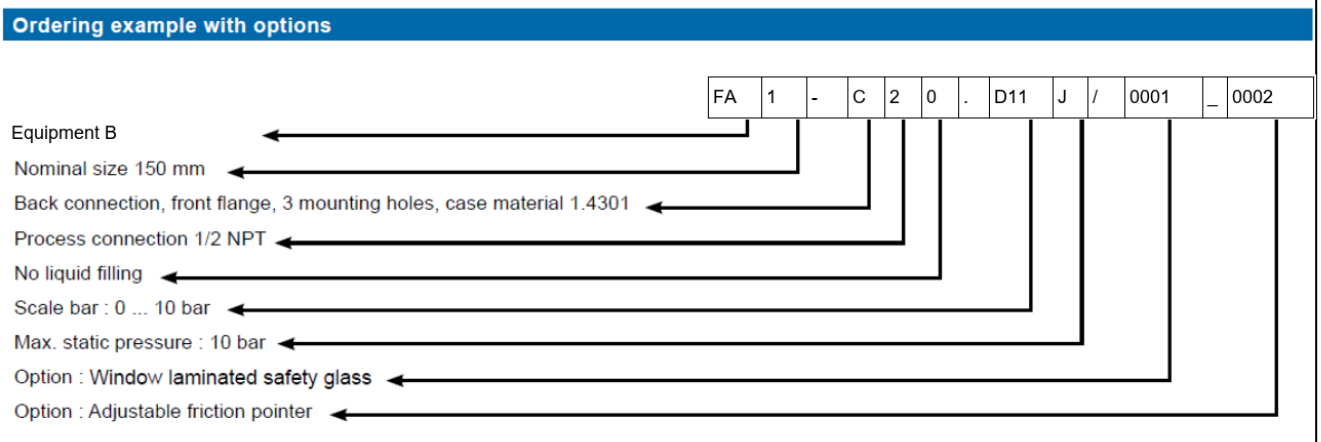

别名化样本：名称、型号及编号已替换；规则保留；示例型号不作为产品选型依据。

5. 字段填写规范

制造商A设备A主数据各字段维护标准，详见《主数据字段维护索引》。以下关键字段维护标准补充如下：

字段名	层级	类型	维护标准	信息来源依据
物料描述（中文）+采购订单文本（中文）	集团层	通用客观类字段	样例： 设备A【FB2-C20.D12】 设备B【FA1-C20.D11J/0001_0002】	厂家产品手册
物料描述（英文）+采购订单文本（英文）	集团层	通用客观类字段	样例： EQUIPMENT A【FB2-C20.D12】 EQUIPMENT B【FA1-C20.D11J/0001_0002】	厂家产品手册
基本物料（材质）	集团层	通用客观类字段	不适用	NA
制造商	集团层	通用客观类字段	制造商A 或 集团A 样例： 企业编号A、企业编号B	厂家产品手册、实物、图纸
制造商零件编号	集团层	通用客观类字段	无	NA
电厂制造厂图纸号	电厂层	通用客观类字段	无	NA
电厂制造厂图项号	电厂层	通用客观类字段	无	NA
检验文本	集团层	专用类字段	无	NA

别名化样本：名称、型号及编号已替换；规则保留；示例型号不作为产品选型依据。

6. 其他重要事项

无。

7. 附件

附件1：FA-FB-FC-FD 设备B选型表，更多选型表见资料A。

Ordering details FA-FB-FC-FD

	F 1 -			. xxx	/
Model					
Equipment B	F				
Type of housing					
Process connection 90° bottom (V-type) or lower back	A				
Process connection 90° bottom (V-type) or lower back, baffle wall	B				
Process connection bottom parallel	C				
Process connection bottom parallel, baffle wall	D				
Nominal size					
150 mm		1			
Type of mounting					
Stainless steel case and bezel ring 1.4301 (AISI 304)					
Bottom connection, back flange for wall mounting, 3 mounting holes		A			
Back connection, front flange, 3 mounting holes (1)		B			
Bottom connection, front flange, 3 mounting holes		C			
Bottom connection		D			
Back connection, back flange for wall mounting, 3 mounting holes (1)		E			
Back connection (1)		F			
Bottom connection with mounting bracket for 2" tubes		P			
Stainless steel case and bezel ring 1.4404 (AISI 316L)					
Bottom connection, back flange for wall mounting, 3 mounting holes		1			
Back connection, front flange, 3 mounting holes (1)		2			
Bottom connection, front flange, 3 mounting holes		3			
Bottom connection		4			
Back connection, back flange for wall mounting, 3 mounting holes (1)		5			
Back connection (1)		6			
Bottom connection with mounting bracket for 2" tubes		8			
Process connection					
G 1/2			3		
1/2 NPT			6		
Liquid filling					
Dry				0	
BH1: low viscosity glycerin/water 86% (medium : -20 ... +70°C) (2)				1	
BH2: high viscosity glycerin 99.5% (medium : 0 ... +90°C) (2)				2	
BH3: silicone oil (medium : -40 ... +100°C) (2)				3	
BH4: low temperature silicone (medium : -60 ... +100°C) (2)				4	
BH5: Fluor carbon for oxygen use (medium : -15 ... +100°C) (2)				5	
Unit of measurement / Pressure ranges					
bar					Bxx
psi					Hxx
kPa					Dxx
MPa					Exx
mbar					Nxx
kg/cm²					Fxx
Max. static pressure					
See table on page 2					x
Options to be added behind the / (see example below)					/

(1) Not available for types of housing B and D
(2) The accuracy of filled gauges is reduced (see table on page 2)

选型表.1