


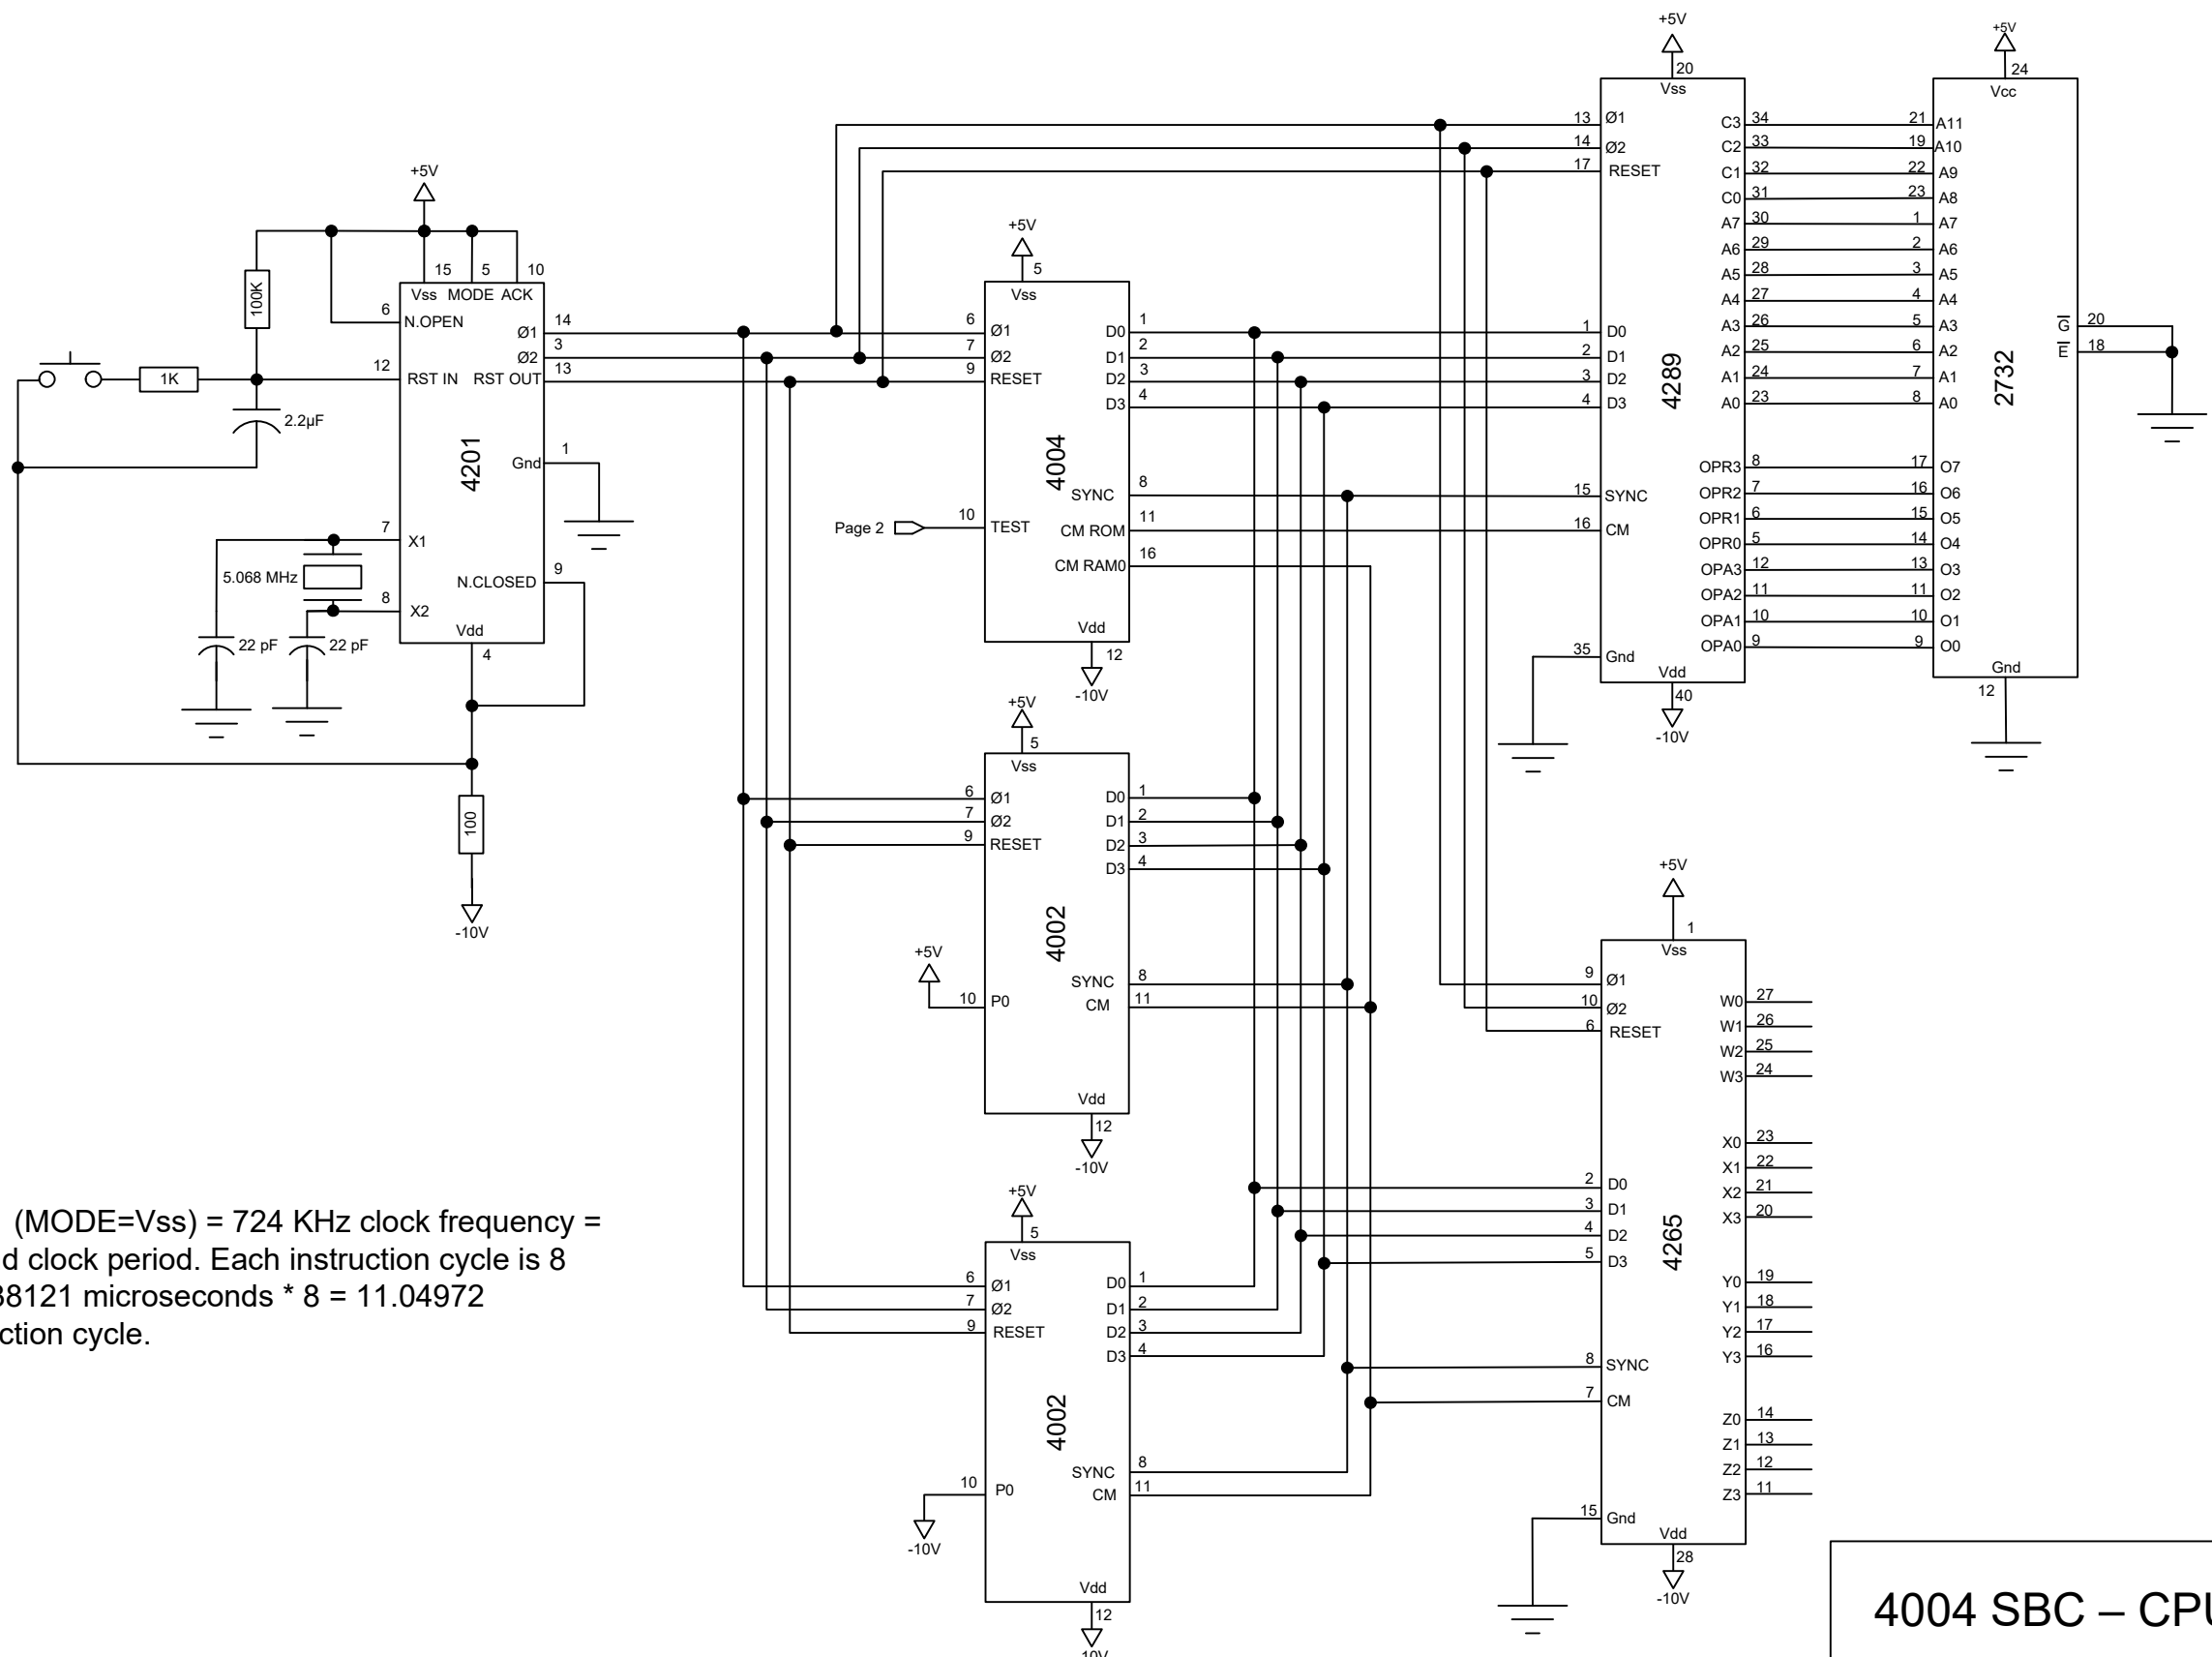


5.068 MHz crystal/7 (MODE=Vss) = 724 KHz clock frequency =
1.38121 microsecond clock period. Each instruction cycle is 8
clock periods so: 1.38121 microseconds * 8 = 11.04972
microseconds/instruction cycle.

4004 SBC – CPU and Memory


Note: 0.1 µF decoupling capacitors not shown.

Drawn by: jsl

Date:

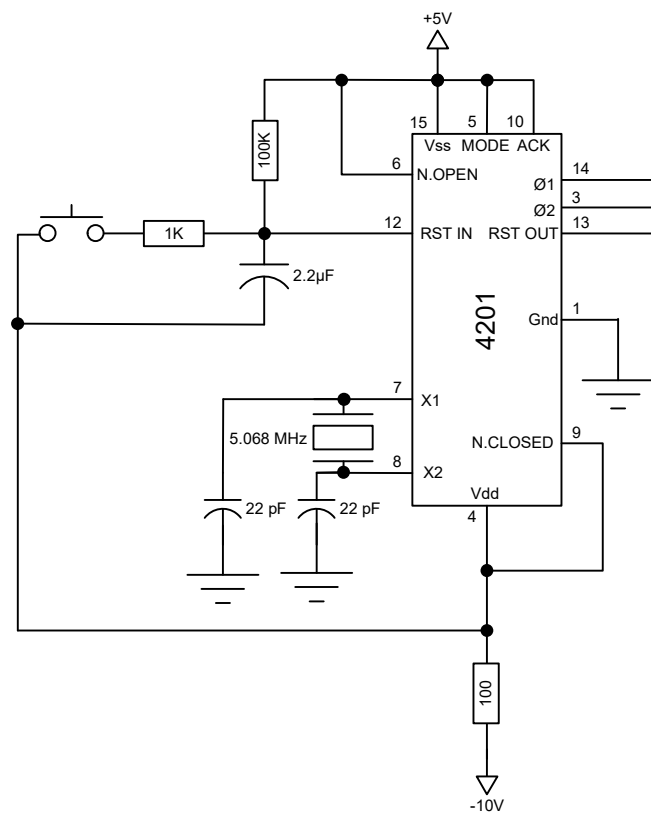

$5.068 \text{ MHz} / 7 (\text{MODE} = \text{Vss}) =$
 $724 \text{ KHz clock} =$
 $1.381 \mu\text{Sec clock period}$

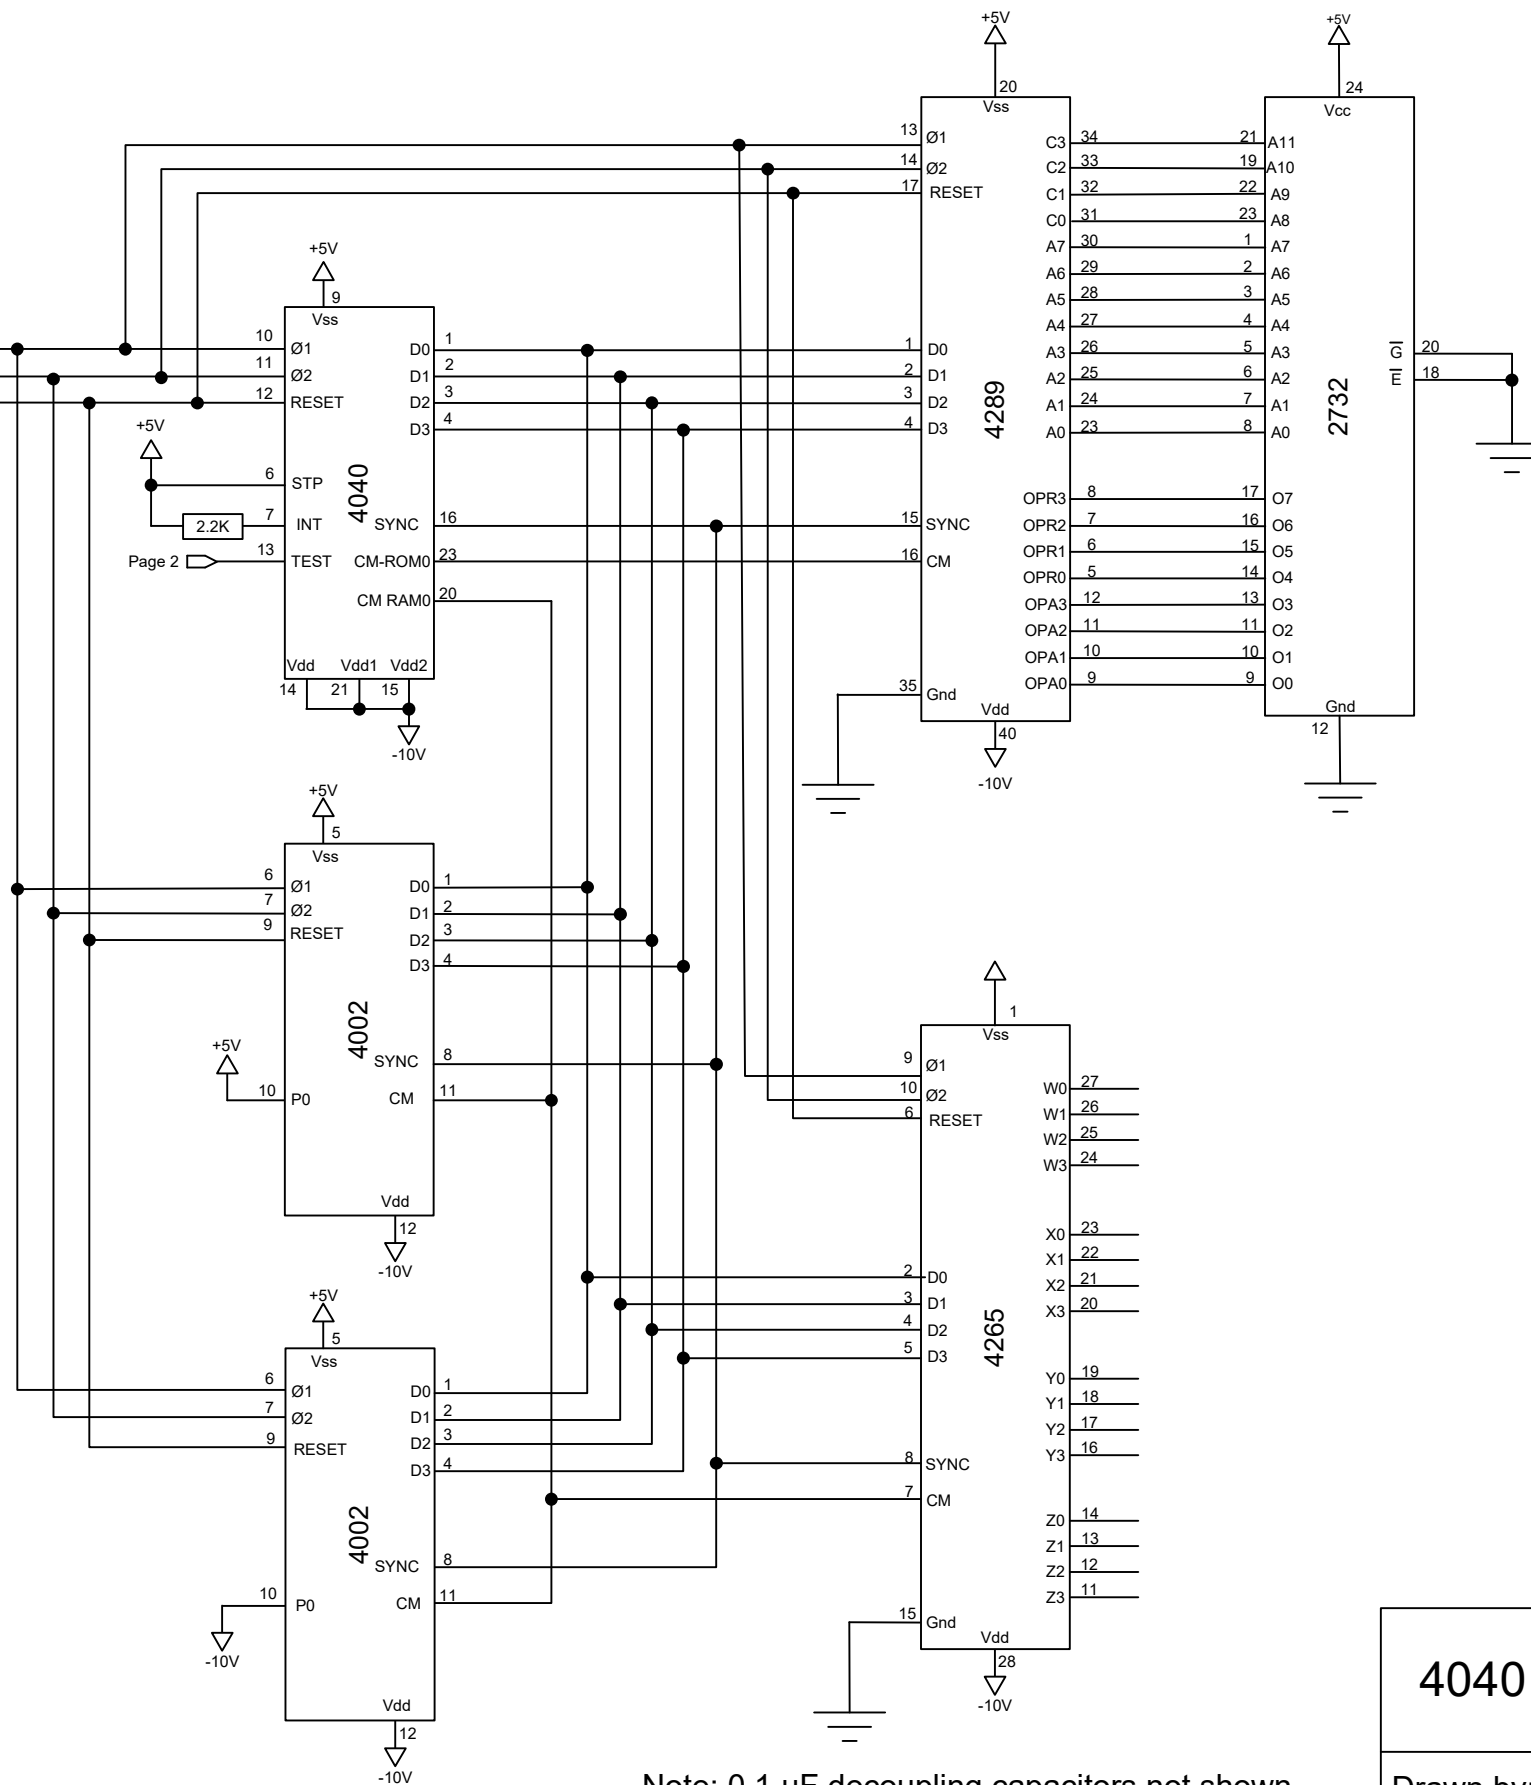


Note: 0.1 µF decoupling capacitors not shown.


4040 SBC – CPU and Memory

Drawn by: jsl

Date:

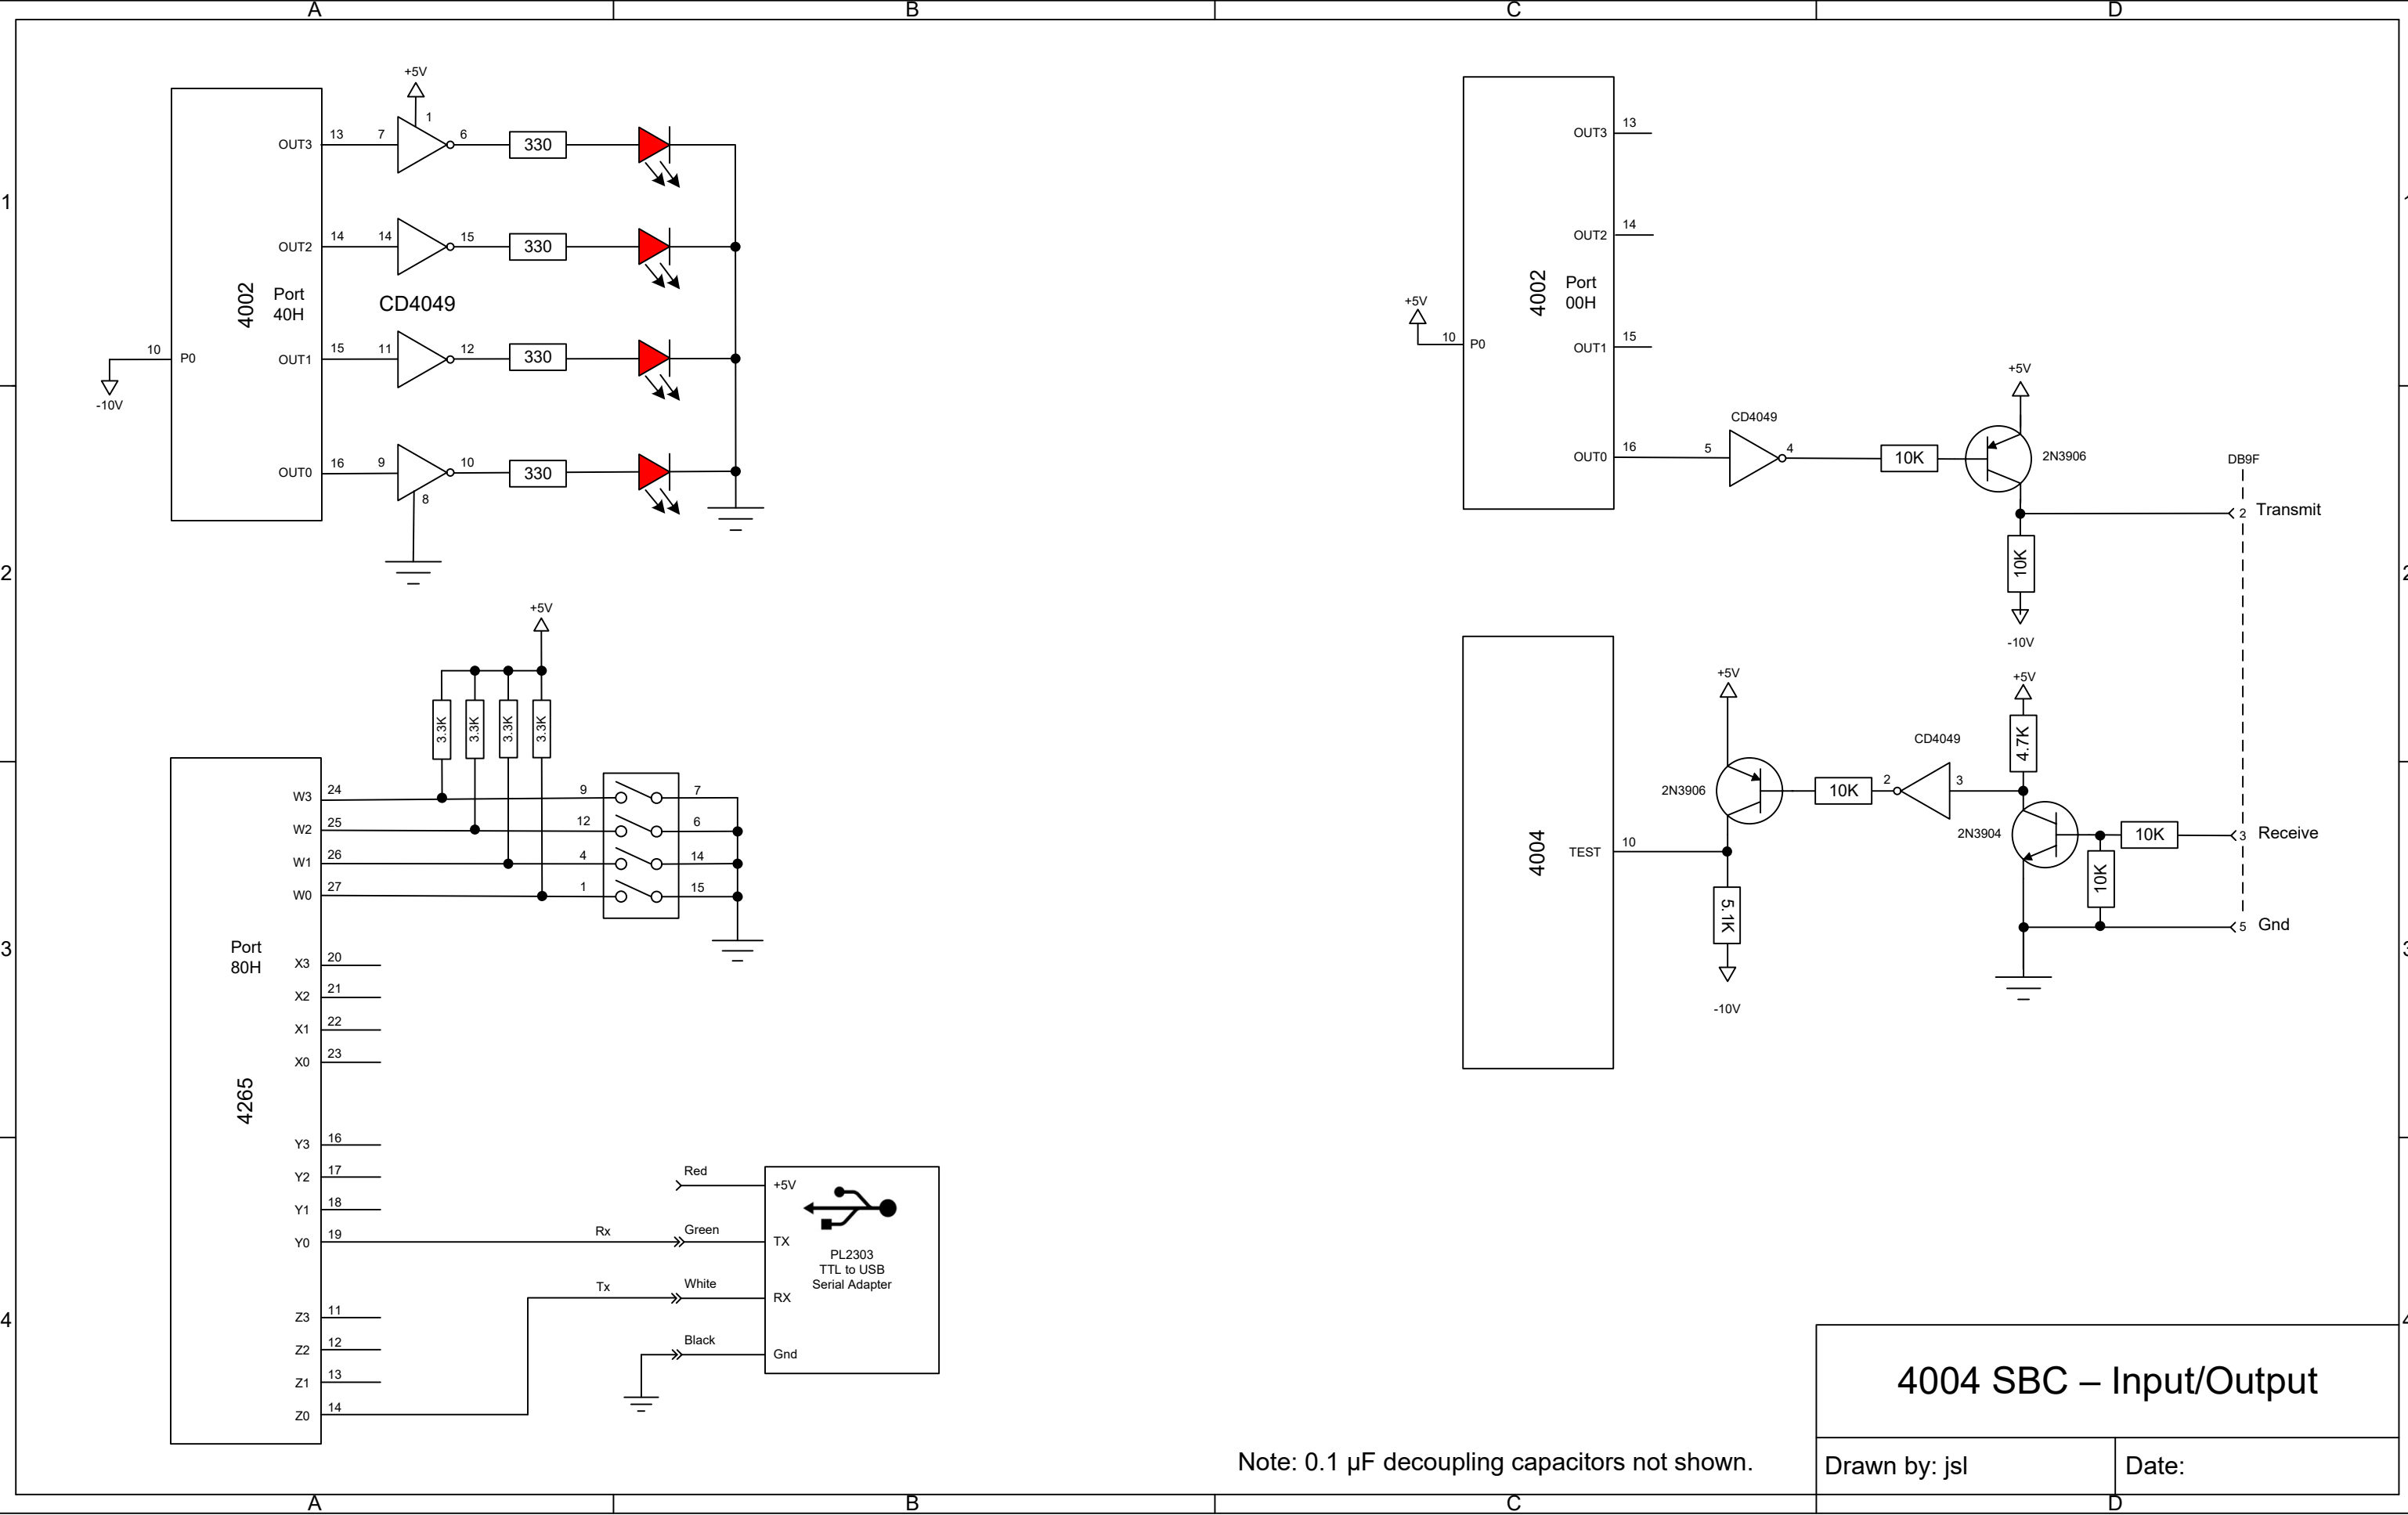

CUI Inc.
PEME2-S5-D5-S
DC-DC Converter

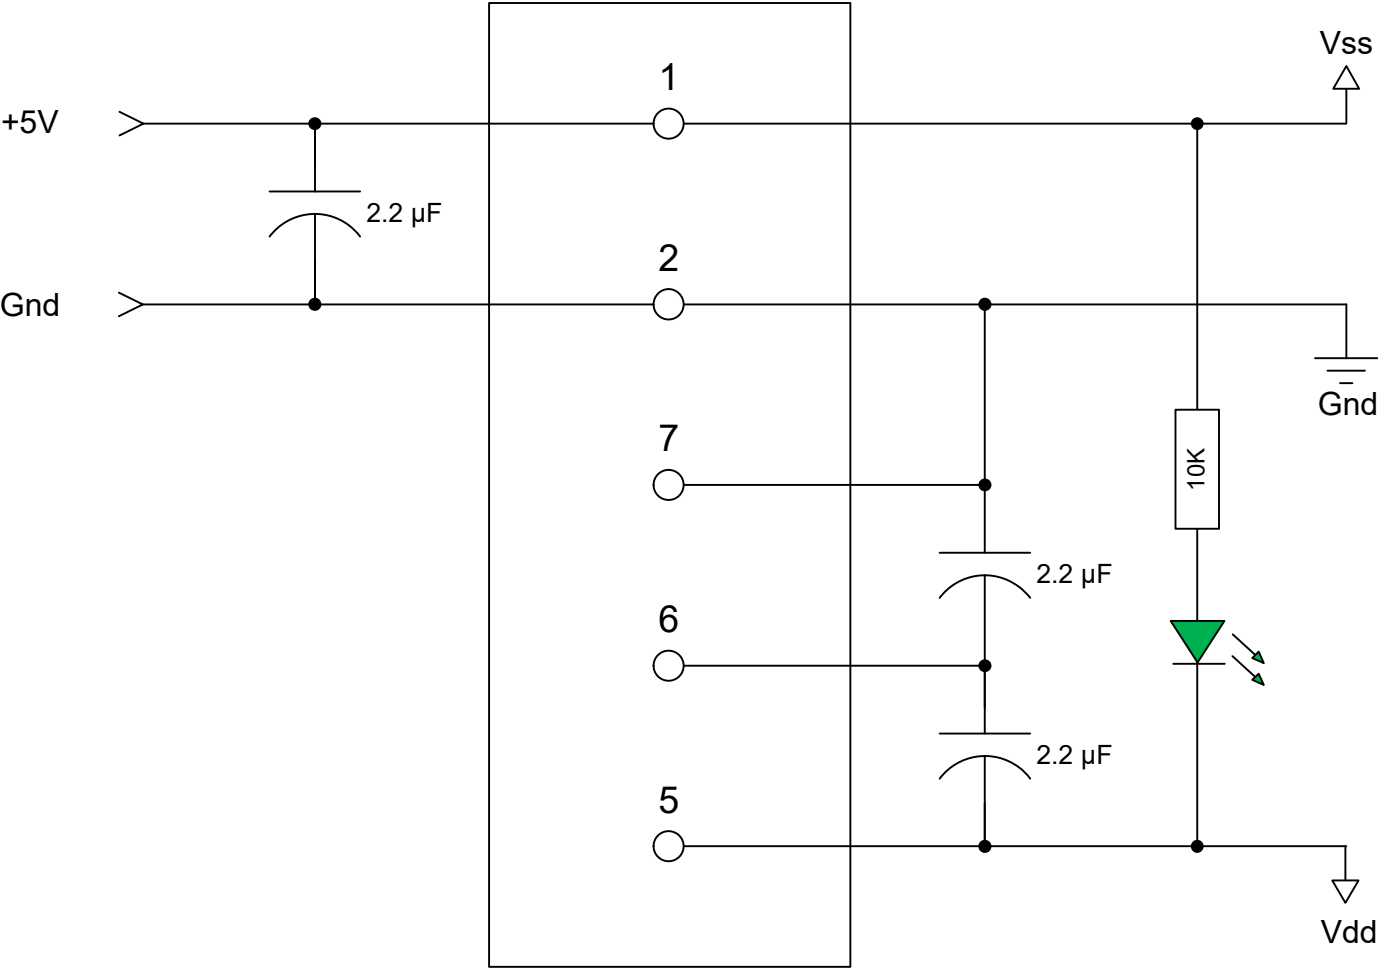

4004 SBC – Power Supply

Drawn by: jsl

Date: