
On-Board Type (DC) EMI Suppression Filters (EMIFIL®)

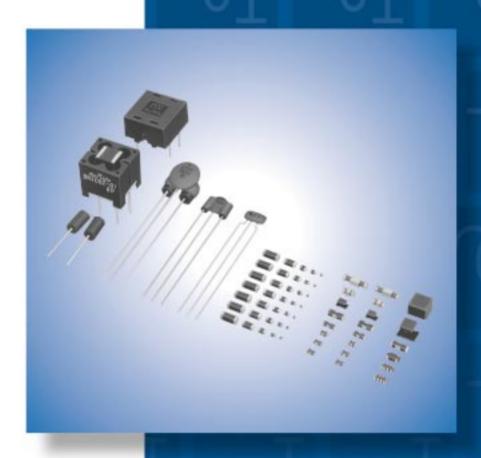

muRata

Innovator in Electronics

Murata Manufacturing Co., Ltd.

CONTENTS

EMIFIL®, EMIGUARD®, "EMIFIL" and "EMIGUARD" in this catalog are the trademarks of Murata Manufacturing Co., Ltd.

| Selection Guide of EMI Filters | | | 2 |
|--|--------|--|-----------------|
| Products Guide / Effective Frequency Range | | | 4 |
| Outlines of EMI Suppression Filters (EMIFIL®) for DC L | Line | · | 7 |
| _ | | | |
| 1 Chip Ferrite Beads Part Numbering / Impeda | ance I | Map / BLM Series Line Up —————— | — 13 |
| ●BLM03A/15A/18A/21A ─── | 20 | ●BLM03P/15P/18P/21P/31P/41P | — 49 |
| ●BLM18T ———————————————————————————————————— | 28 | ●BLM18S — | — 57 |
| ●BLM03B/15B/18B/21B | 30 | ● For GHz Range Noise Suppression BLM15H/15E/18H/18E/18G - | — 60 |
| ●BLM18R/21R ————— | 44 | ●Array Type BLA2AA/2AB/31A/31B ——— | — 7 3 |
| | | | |
| 2 Chip EMIFIL® Part Numbering — | | | — 80 |
| Capacitor Type NFM18C/21C/3DC/41C — | 84 | ●RC Combined Type NFR21G | — 96 |
| Capacitor Array Type NFA31C ———— | | | |
| ●LC Combined Monolithic Type NFL18ST/18SP/21S — | | | |
| ●LC Combined Array Type NFA2AS/21S — | | | |
| ●LC Combined Wire Wound Type NFW31S — | 94 | ●LC Combined Type for Large Current NFE61H | —110 |
| 3 Chip Common Mode Choke Coils Part Nur | mbor | in a | 111 |
| • | | _ | |
| •Film Type DLP0NS/11S/31S | | 3. | |
| •Film Type Array DLP2AD/31D ———————————————————————————————————— | | • Wire wound Type for Large Current DLW5AH/5BS/5BT | — 125 |
| ●Monolithic Type DLM11G/2HG ———— | 119 | | |
| _ | | | |
| 4 Block Type EMIFIL® | | | |
| ●SMD Type BNX022 ── | 128 | | |
| ●Lead Type BNX00□/01□ ———— | | | |
| | | | |
| | | | |
| | | | |
| 5 Lead Type EMI Suppression Filters (EMIFIL | L®) | | |
| Ferrite Beads Inductors Part Numbering | | $EMIGUARD^{	ext{@}}$ ($EMIFIL^{	ext{@}}$ with Varistor Function) Part M | Vumberin |
| | | ●VFR3V/VFS6V/VFS9V — | <u> </u> |
| Disc Type EMIFIL® Part Numbering | | Common Mode Choke Coils Part Numbering | |
| ●DS□6/Wide frequency DS□9N/Heavy-duty Type DS□9H — | 137 | ●PLT09H ─ | 155 |
| | | | |
| 6 Microwave Absorbers Part Numbering — | | | — 157 |
| ●EA10/20/21/30 ── | 158 | | |
| | | | 161 |
| | | | |
| | | | 164 |
| Раскадіпу | | | 176 |
| Chip Eivii Suppression Filter Design Kits | | | 180 |
| Outlines of Major Noise Regulation Standards —— | | | 186 |


191

195

Noise Suppression Principles by DC EMIFIL®

Murata EMI Filter Selection Simulator


Selection Guide of EMI Filters

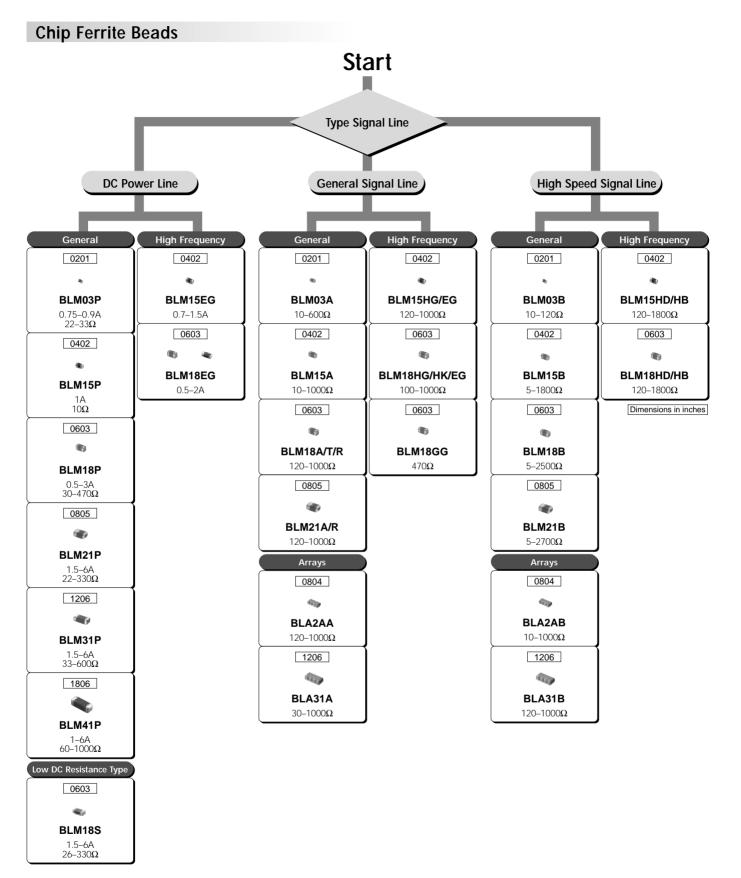

Impedance is typical value at 100MHz.

sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Selection Guide of EMI Filters

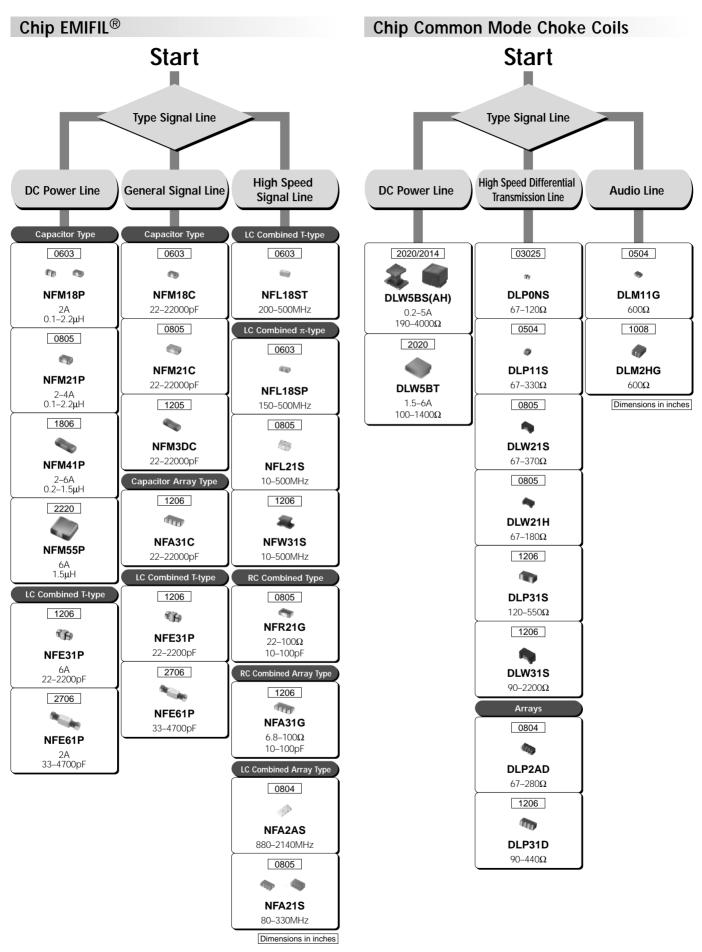

Impedance is typical value at 100MHz.



Products Guide/Effective Frequency Range

Product Guide

| | Typo | | Sorios | Dimer | nsions | Effective Frequency Range |
|------------------|---------------------------|----------|------------------------------------|------------------------|----------|--|
| | Туре | | Series | (mm) | EIA Code | 10kHz 100kHz 1MHz 10MHz100MHz 1GHz 10GHz |
| Inductor Type | For Digital Interfaces | 1 | BLM18R | 1.6 = +0.8 | 0603 | |
| | | * | BLM21R | 2.0 = \$1.25 | 0805 | |
| | Standard | 10 | BLM03A | 0.6 - +0.3 | 0201 | |
| | | 10 | BLM15A | 1.0 = +0.5 | 0402 | |
| | | • | BLM18A | 1.6 | 0603 | |
| | | • | BLM18T | 1.6 ≐ •0.8 | 0603 | |
| | | • | BLM21A | 2.0 = \$1.25 | 0805 | |
| | | dip. | BLA2AA (4 circuits array) | 2.0 = \$1.0 | 0804 | |
| | | (iii) | BLA31A (4 circuits array) | 3.2 11.6 | 1206 | |
| | For High Speed Signals | n, | BLM03B | 0.6 - •0.3 | 0201 | |
| | | 10 | BLM15B | 1.0 = +0.5 | 0402 | |
| | | 10 | BLM18B | 1.6 ≅ • 0.8 | 0603 | |
| | | * | BLM21B | 2.0 | 0805 | |
| | | (in) | BLA2AB (4 circuits array) | 2.0 ■ ‡1.0 | 0804 | |
| | | (ii) | BLA31B (4 circuits array) | 3.2 11.6 | 1206 | |
| | For High Current | * | BLM03P | 0.6 = +0.3 | 0201 | |
| | | * | BLM15P | 1.0 = +0.5 | 0402 | |
| | | 10 | BLM18P | 1.6 ≅ • 0.8 | 0603 | |
| | | • | BLM21P | 2.0 ■ ‡1.25 | 0805 | |
| | | | BLM31P | 3.2 11.6 | 1206 | |
| | | | BLM41P | 4.5 ‡1.6 | 1806 | |
| | | 40 | BLM18S (Low DC Resistance Type) | 1.6 = •0.8 | 0603 | = |

Continued on the following page.



Products Guide/Effective Frequency Range

Continued from the preceding page.

| | Type | 3 Page. | Series | Dimer | nsions | Effective Frequency Range |
|-------------------|------------------------------|--------------------|------------------------------|-----------------------|----------|--|
| | Туре | | Series | (mm) | EIA Code | 10kHz 100kHz 1MHz 10MHz100MHz 1GHz 10GHz |
| Inductor Type | For GHz Range | * | BLM15HG | 1.0 = +0.5 | 0402 | |
| | Noise Suppression | * | BLM15HB | 1.0 = +0.5 | 0402 | |
| | | * | BLM15HD | 1.0 = •0.5 | 0402 | |
| | | * | BLM15EG | 1.0 ≟ •0.5 | 0402 | |
| | | 10 | BLM18HG | 1.6 ≕ •0.8 | 0603 | |
| | | • | BLM18HB | 1.6 ≕ •0.8 | 0603 | |
| | | • | BLM18HD | 1.6 ≕ +0.8 | 0603 | |
| | | • | BLM18HK | 1.6 = +0.8 | 0603 | |
| | 10 | * | BLM18EG | 1.6 = +0.8 | 0603 | |
| | | 1 | BLM18GG | 1.6 = +0.8 | 0603 | |
| Capacitor Type | Standard Type | • | NFM18C | 1.6 ≟ • 0.8 | 0603 | |
| | | | NFM21C | 2.0 ± ‡1.25 | 0805 | |
| | | • | NFM3DC | 3.2 \$1.25 | 1205 | |
| | | | NFM41C | 4.5 ‡1.6 | 1806 | |
| | | THE PARTY NAMED IN | NFA31C (4 circuits array) | 3.2 \$1.6 | 1206 | |
| | For Signal Lines | liky | NFL18ST | 1.6 ≕ • 0.8 | 0603 | |
| | | 41gp | NFL18SP | 1.6 ≅ • 0.8 | 0603 | |
| | | | NFL21S | 2.0 | 0805 | |
| | | фÞ | NFA2AS (4 circuits array) | 2.0 • +1.0 | 0804 | |
| | • | Ф | NFA21S (4 circuits array) | 2.0 ± ‡1.25 | 0805 | |
| | | 8 | NFW31S | <u>3.2</u> ‡1.6 | 1206 | |
| | | | NFR21G | 2.0 ■ ‡1.25 | 0805 | |
| | | | NFA31G (4 circuits array) | <u>3.2</u> | 1206 | |
| | For High Current | b (3) | NFM18P | 1.6 = •0.8 | 0603 | |
| | | | NFM21P | 2.0 | 0805 | |
| | | • | NFM3DP | 3.2 ‡1.25 | 1205 | |
| | | | NFM41P | <u>4.5</u> ‡1.6 | 1806 | |
| | 4 | | NFM55P | 5.7 | 2220 | |
| | T Filter for High Current | (B) | NFE31P | 3.2 | 1206 | |
| | - 6 | E. | NFE61P(H) | £1.6 | 2706 | |
| | | | | | | Continued on the following page 7 |


Products Guide/Effective Frequency Range

Continued from the preceding page.


| Tuno | | Sories | Dime | nsions | Effective Frequency Range |
|---|-------|---|-----------------------|----------------|--|
| Туре | | Series | (mm) | EIA Code | 10kHz 100kHz 1MHz 10MHz100MHz 1GHz 10GHz |
| Common Mode Choke Coils | Pr | DLP0NS | 0.85 • +0.65 | 03025 | |
| | 9 | DLP11S | 1.25 ■ ‡1.0 | 0504 | |
| | | DLP31S | 3.2 11.6 | 1206 | |
| | Ф | DLP2AD | 2.0 = \$1.0 | 0804 | |
| | TIT | DLP31D | 3.2 11.6 | 1206 | |
| | * | DLM11G | 1.25 ■ ‡1.0 | 0504 | |
| | 4 | DLM2HG | 2.5 12.0 | 1008 | |
| | | DLW21S | 2.0 ■ ‡1.2 | 0805 | |
| | * | DLW21H | 2.0 ■ ‡1.2 | 0805 | |
| | - | DLW31S | 3.2 11.6 | 1206 | |
| \$ | | DLW5BS (DLW5AH) | 5.0 (3.6) | 2020 (2014) | |
| | | DLW5BT | 5.0 | 2020 | |
| Disc EMIFIL® | | BL01/02/03 DSN6/9(H) DSS6/9(H) DST9(H) | | | |
| EMIGUARD® (EMI Filters with varistor function) | ions) | VFR3V VFS6V/9V | | | |
| Block EMIFIL® | | BNX022 BNX002/003/005 BNX012/016 | | | |
| Common Mode Choke C | Coils | PLT09H | | | |
| Microwave Absorbers | - | EA10/20/21/30 | | | |




- Chip Ferrite Bead
- Ferrite Bead Inductor

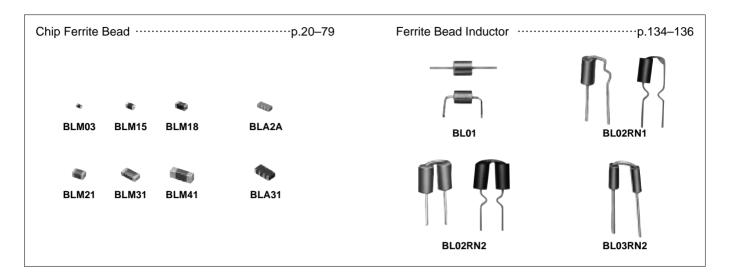


- Chip Ferrite Beads are effective for frequencies ranging from a few MHz to a few GHz. Chip Ferrite Beads are widely used as a low noise countermeasure, as well as a universal noise suppression component.
- Chip Ferrite Beads produce a micro inductance in the low frequency range. At high frequencies, however, the resistive component of the inductor produces the primary impedance. When inserted in series in the noise producing circuit, the resistive impedance of the inductor prevents noise propagation.

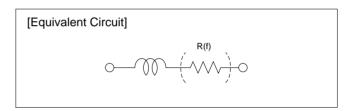


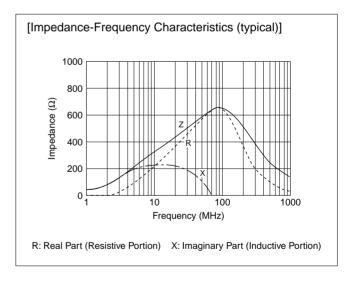


- ●Chip EMIFIL®
- ■T-type Chip EMIFIL®
- ■Disk Type EMIFIL®

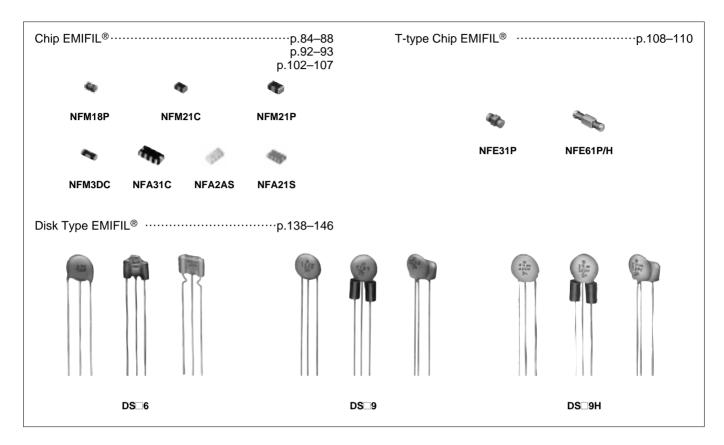

- This capacitor type EMI suppression filter has a large noise suppression effect at frequencies ranging from a few MHz to hundreds of MHz. This type of filter is used widely as a universal, high performance EMI suppression component.
- The chip EMIFIL[®] incorporates a built-in three terminal capacitor, eliminating the lead wire and thereby increasing the high frequency performance characteristic.
- The T-type chip EMIFIL® is a chip EMI suppression filter with a built-in feed-thru capacitor. The use of ferrite beads on input and output terminals minimizes resonance with surrounding circuits.
- Whatever the situation, three terminal construction reduces residual inductance, thereby substantially improving noise suppression at frequencies over 10MHz.

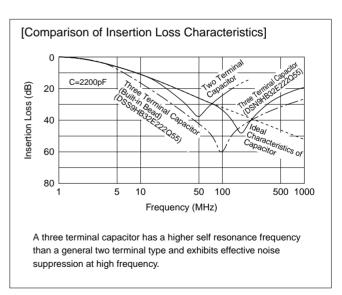

- Chip EMIFIL® for Signal Line
- Chip EMIFIL® with Waveform Distortion Suppressing Function

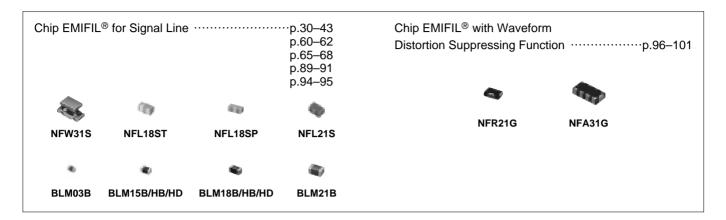


High-speed signal application EMIFIL® are high performance EMI suppression filters which increase the slope of insertion loss frequency characteristic curves (shape factor), thereby improving noise and signal separation.
 These are used for high speed signal applications in which noise and signal frequency approach the same value.

To avoid the elimination of both the noise and specific signal components, three terminal capacitors and other components are applied.


An NFW31S with a built-in capacitor and an inductor type BLMDDB are available.

BLM HB/HD has additional performance for suppressing GHz range noise after cut-off frequency.

The EMIFIL[®] with waveform distortion suppressing function suppresses waveform distortion caused by the resonance of digital ICs and surrounding circuits.

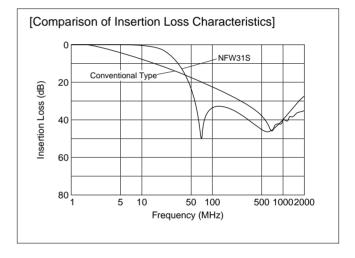



- Chip Common Mode Choke Coil
- ■Common Mode Choke Coil

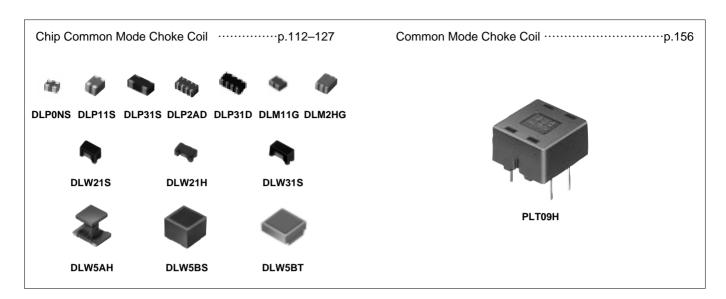


• These choke coils reduce common mode noise, which causes problems on balanced transmission lines, and are effective against common mode noise in the several MHz to several 100MHz frequency range.

They are ideally suited for noise suppression on DC power supply lines and interface cables.

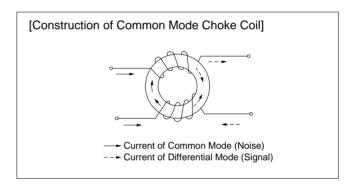


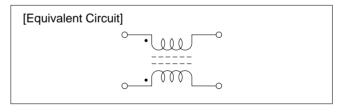

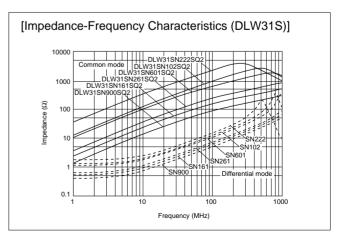





EMIGUARD®

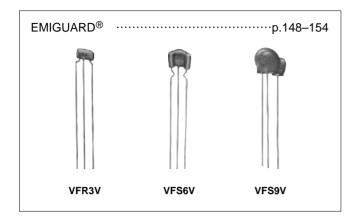


- EMIGUARD® eliminates both surge noises and EMI noises due to its dielectric varistor material.
- Effective when high frequency noise and high voltage surge suppression are required, and also in situations when surging starts at extremely high speeds. This type of surging cannot be eliminated with general type varis-

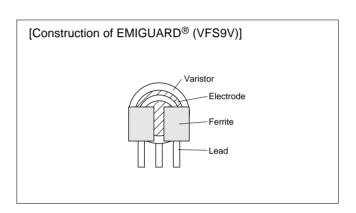


■Surge Absorption Effect of EMIGUARD®

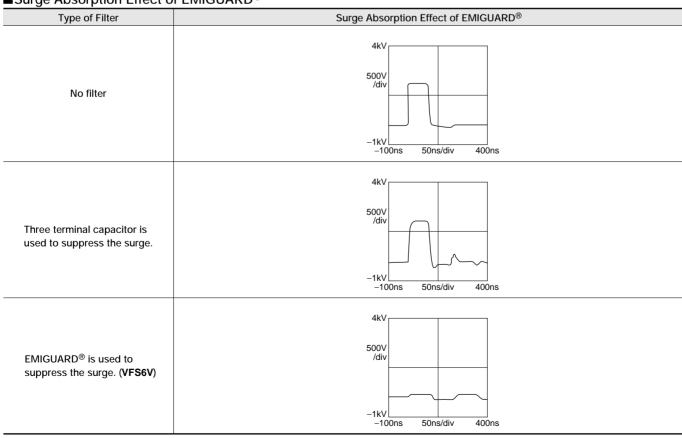


Block Type EMIFIL®

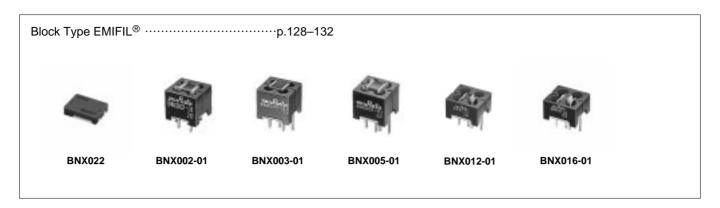


- Block type EMIFIL® are resin encased, built-in, high performance EMI suppression filters, which use a feed-thru capacitor having excellent high frequency characteristics.
- Used when the noise frequency is high, or when extreme countermeasures are required.
- The high performance EMIFIL® BNX series exhibits significant noise suppression effects over a wide frequency band (extending from 100kHz to 1GHz) in DC power lines.

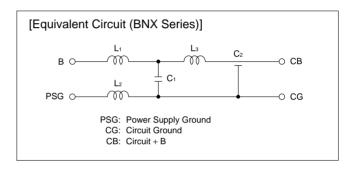

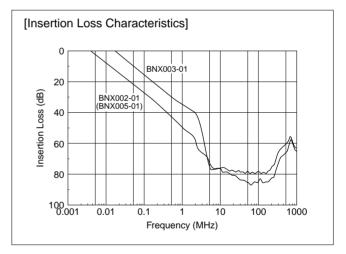

• In operating temperatures exceeding +85°C, derating of current is necessary for BNX010 series. Please apply the derating curve according to the operating temperature.

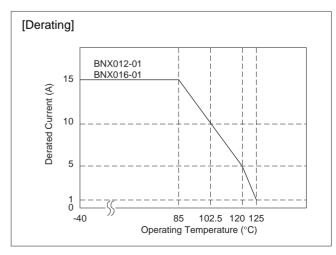

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip Ferrite Beads Part Numbering

Chip Ferrite Beads

BL M 18 AG 102 S N 1 D (Part Number)

Product ID

| Product ID | |
|------------|--------------------|
| BL | Chip Ferrite Beads |

2Type

| Code | Туре |
|------|-----------------|
| Α | Array Type |
| М | Monolithic Type |

3Dimensions (LXW)

| Code | Dimensions (LXW) | EIA |
|------|------------------|------|
| 03 | 0.6×0.3mm | 0201 |
| 15 | 1.0×0.5mm | 0402 |
| 18 | 1.6×0.8mm | 0603 |
| 2A | 2.0×1.0mm | 0804 |
| 21 | 2.0×1.25mm | 0805 |
| 31 | 3.2×1.6mm | 1206 |
| 41 | 4.5×1.6mm | 1806 |

6 Impedance

Expressed by three figures. The unit is in ohm (Ω). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

6 Performance

Expressed by a letter.

| Ex.) | Code | Performance |
|------|------|-------------|
| | S/T | Sn Plating |
| | Α | Au Plating |

Category

| Code | Category |
|------|---------------|
| N | Standard Type |

8 Number of Circuits

| Code | Number of Circuits |
|------|--------------------|
| 1 | 1 Circuit |
| 4 | 4 Circuits |

4Characteristics/Applications

| Code *1 | Characteristics/Applications | Series |
|---------|---|--------------------------|
| AG | for Conord Ho | BLM03/15/18/21, BLA2A/31 |
| TG | for General Use | BLM18 |
| ВА | | BLM18 |
| ВВ | for High-speed Signal Lines | BLM03/15/18/21, BLA2A |
| BD | | BLM15/18/21, BLA2A/31 |
| PG | for Power Supplies | BLM03/15/18/21/31/41 |
| SG | for Power Supplies (Low DC Resistance Type) | BLM18 |
| RK | for Digital Interface | BLM18/21 |
| HG | for GHz Band General Use | DI MAE/AO |
| EG | for GHz Band General Use (Low DC Resistance Type) | BLM15/18 |
| НВ | for CITE Day delich are and City all in- | DI MAEMO |
| HD | for GHz Band High-speed Signal Line | BLM15/18 |
| нк | for GHz Band Digital Interface | DI 8440 |
| GG | for High-GHz Band General Use | BLM18 |

^{*1} Frequency characteristics vary with each code.

Packaging

| Code | Packaging | Series |
|------|-------------------------------|------------------------------|
| K | Embossed Taping (ø330mm Reel) | BLM31/41/21*1 |
| L | Embossed Taping (ø180mm Reel) | BLW31/41/21 |
| В | Bulk | All Series |
| J | Paper Taping (ø330mm Reel) | BLM03/15/18*3/21*2, BLA2A/31 |
| D | Paper Taping (ø180mm Reel) | BLM03/15/18/21 *2, BLA2A/31 |
| С | Bulk Case | BLM15/18 |

^{*1} BLM21BD222SN1/BLM21BD272SN1 only.

^{*2} Except BLM21BD222SN1/BLM21BD272SN1

^{*3} Except BLM18T

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip Ferrite Bead BLM Series

Essential for Noise Suppression in High Speed Signal Lines and DC Power Lines

The chip ferrite bead BLM series comprises ferrite beads in the shape of a chip. This ferrite bead generates a high impedance which at high frequencies mainly consists of a resistance element. BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground.


Chip sizes of 0.6x0.3, 1.0x0.5, 1.6x0.8, 2.0x1.25, 3.2x1.6 and 4.5x1.6mm are cataloged. (BLA series of array type chip ferrite beads is also cataloged.)

The nickel barrier structure of the external electrodes provides excellent solder heat resistance.

■Features

BLM series comprises R series (for digital interface), A series (for standard), B series (for high speed signal), P series (for large current), and H/E/G series (for GHz range noise suppression).

- BLM R series For Digital Interface
 BLM-R series can be used in Digital Interface.
 Resistance of BLM-R series especially grows in the lower frequency range. Therefore BLM-R series is less effective for digital signal waveform at low frequency range and can suppress the ringing.
- BLM A/T series For General Use
 BLM-A series generates an impedance from the relatively
 low frequencies. Therefore BLM-A series is effective in
 noise suppression in the wide frequency range
 (30MHz several hundred MHz).
- BLM B series For High Speed Signal
 BLM-B series can minimize attenuation of the signal
 waveform due to its sharp impedance characteristics.
 Various impedances are available to match signal
 frequency.
- BLM□□P/S series For Large Current
 BLM-P/S series can be used in high current circuits due
 to its low DC resistance. It can match power lines to a
 maximum of 6A DC.
- 5. BLM H/E/G series For GHz Range Noise Suppression BLM H/E/G series has a modified internal electrode structure that minimizes stray capacitance and increases the effective frequency range.

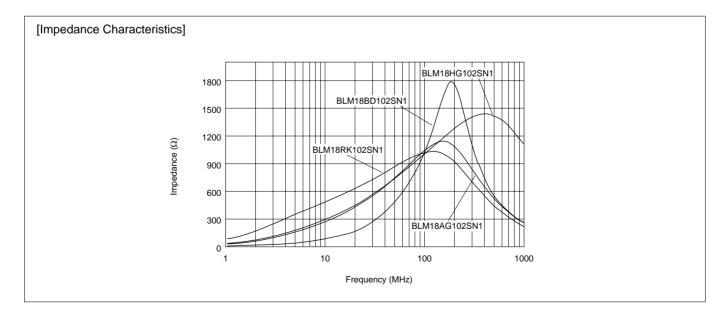

| | | | | | | | | 2700 | | | | | | | | | |
|-----|-----|------|------|------|-----|------|------|------------|------|------|------------|--------------------------|------------|------------|-------------|------|---|
| | | | | | | | 2500 | | | | | | | | | | |
| | | | | | | | | 2250 | | | | | | | | | |
| | | | | | | | | 2200 | | | | | | | | | |
| | | | | | | 1800 | | 1800 | | | | | | | | 1800 | |
| | | | | | | | | 1500 | | | | | | | | | |
| 000 | - | 1000 | 1000 | 1000 | | 1000 | 1000 | 1000 | 1000 | 1000 | | | | | 1000 (1.5A) | 1000 | 1 |
| | 600 | 600 | 600 | 600 | | 600 | 600 | 750 600 | 600 | 600 | | | | 600 (1.5A) | | 600 | |
| | 000 | 000 | 470 | 470 | | 470 | 470 | 470 | 470 | 470 | | 470 (1A) | | 000 (1.5A) | 470 (2A) | 000 | 2 |
| | | | | | | | 420 | 420 | | | | , | | | (=: 1) | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | 000 (4.04) | | 390 (2A) | | | ; |
| | | | 330 | 330 | | | 330 | 330 | | | | 330 (1.2A) 330 (1.5A) | 330 (1.5A) | | | | : |
| | 240 | 000 | 000 | 000 | | 000 | 000 | 000 | 000 | | | 220 (1.4A) | 000 (04) | | | 000 | |
| | | 220 | 220 | 220 | | 220 | 220 | 220 | 220 | 220 | | 220 (1.4A) 220 (2.5A) | 220 (2A) | | | 220 | : |
| | | | | | | | | 200 | | | | 180 (1.5A) | | | 180 (3A) | | |
| | | | 150 | 150 | | | 150 | 150 | | | | , | | | .00 (0/1) | | |
| | | | | | | | 140 | | | | | | | | | | |
| | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | | 120 (2A) 120 (3A) | | 120 (3A) | | 120 | |
| 100 | - | | | | | | | | | | | , , | | | | | |
| | | | | | | | | | | | | | | | (0.1) | | |
| | 70 | 70 | | | 75 | 75 | 75 | 75 | | | | 70 (4A) | | | 75 (3A) | | |
| | 70 | 70 | | | | | 60 | 60 | | | | 60 (0.5A) | 60 (3A) | | 60 (6A) | | |
| | | | | | | | | | | | | (0.0.1) | 00 (0.1) | 50 (3A) | 00 (0/1) | | |
| | | | | | 47 | 47 | 47 | | | | | | | | | | |
| | | | | | | | | | | | 33 (0.75A) | 33 (3A) | | 33 (6A) | | | |
| | | | | 1 | | 1 | 1 | | | 1 | I | I | 1 | I | 1 | | 1 |

22 (0.9A)

0603

0201

0603

0805

For Digital Interface BLM□□R

10 (1A)

1005

0402

22 22 22

10 10 10

EIA Code 0201 0402 0603 0805 0201 0402 0603 0805

5 5

For High Speed Signal BLM□□B

0603 1005 1608 2012 0603 1005 1608 2012 1608 2012

10 - 10

mm

10

For Standard BLM□□A/T 30 (1A)

26 (6A)

1608

0603

30 (3A)

22 (6A)

2012

0805

For Large Current BLM□□P/S

()=Rated Current

3216

1206

1005

0402

4516

1806

1608

0603

GHz Range Noise Suppression Type BLM□□H/E/G



■BLM Series

| ze (EIA Code) | | Туре | Part Number | Impeda | ance (Ω) | Rated Current (m | |
|---------------|--|---------------------------|--------------------------------|-----------|------------|--------------------|--|
| Le (LIA Code) | | i ype | i ait Nullibei | at 100MHz | at 1GHz | Nated Current (III | |
| | | | BLM03AG100SN1 | 10 (Typ.) | - | 500 | |
| | | | BLM03AG700SN1 | 70 (Typ.) | - | 200 | |
| | For | Standard | BLM03AG121SN1 | 120±25% | - | 200 | |
| | | | BLM03AG241SN1 | 240±25% | - | 100 | |
| | | | BLM03AG601SN1 | 600±25% | - | 100 | |
| 0004 | For High Speed Signal | | BLM03BB100SN1 | 10±25% | - | 300 | |
| 0201 | | | BLM03BB220SN1 | 22±25% | - | | |
| | | | BLM03BB470SN1 | 47±25% | - | 200 | |
| | | | BLM03BB750SN1 | 75±25% | - | | |
| | | | BLM03BB121SN1 | 120±25% | - | 100 | |
| | | | BLM03PG220SN1 | 22±25% | - | 900 | |
| | For La | arge Current | BLM03PG330SN1 | 33±25% | - | 750 | |
| | | | BLM15AG100SN1 | 10 (Typ.) | - | 1000 | |
| | | | BLM15AG700SN1 | 70 (Typ.) | - | | |
| | | | BLM15AG121SN1 | 120±25% | - | 500 | |
| | | | BLM15AG221SN1 | 220±25% | - | | |
| | For | Standard | BLM15AG601SN1 | 600±25% | - | 300 | |
| | | | BLM15AG102SN1 | 1000±25% | - | 200 | |
| | | | BLM15AG601AN1 | 600±25% | - | 300 | |
| | | | BLM15AG102AN1 | 1000±25% | _ | 200 | |
| | | | BLM15BB050SN1 | 5±25% | _ | 500 | |
| | | | BLM15BB100SN1 | 10±25% | _ | 000 | |
| | | | BLM15BB220SN1 | 22±25% | _ | _ | |
| | For High Speed Signal (Sharp impedance characteristics) | | BLM15BB470SN1 | 47±25% | - | 300 | |
| | | | BLM15BB750SN1 | 75±25% | - | | |
| | | | BLM15BB121SN1 | | - | | |
| | | | BLM15BB121SN1 | 120±25% | - | 200 | |
| | | | BLM15BD750SN1 | 220±25% | - | 200 | |
| 0402 | | | BLM15BD7505N1 | 75±25% | - | | |
| | | | BLM15BD121SN1 | 120±25% | - | 300 | |
| | | | BLM15BD2215N1 BLM15BD471SN1 | 220±25% | - | | |
| | _ | | | 470±25% | - | | |
| | | | BLM15BD601SN1 | 600±25% | - | 200 | |
| | | | BLM15BD102SN1 | 1000±25% | - | 100 | |
| | | _ | BLM15BD182SN1 | 1800±25% | - | 100 | |
| | For La | arge Current | BLM15PG100SN1 | 10 (Typ.) | - | 1000 | |
| | | For Standard | BLM15HG601SN1 | 600±25% | 1000±40% | 300 | |
| | | | BLM15HG102SN1 | 1000±25% | 1400±40% | 250 | |
| | | | BLM15HB121SN1 | 120±25% | 500±40% | 300 | |
| | | For High Speed | BLM15HB221SN1 | 220±25% | 900±40% | 250 | |
| | GHz Range | Signal | BLM15HD601SN1 | 600±25% | 1400±40% | 300 | |
| | | | BLM15HD102SN1 | 1000±25% | 2000±40% | 250 | |
| | | | BLM15HD182SN1 | 1800±25% | 2700±40% | 200 | |
| | | For Standard (Low DC – | BLM15EG121SN1 | 120±25% | 145 (Typ.) | 1500* | |
| | | Resistance Type) | BLM15EG221SN1 | 220±25% | 270 (Typ.) | 700* | |
| | | | BLM18AG121SN1 | 120±25% | - | | |
| | | | BLM18AG151SN1 | 150±25% | - | | |
| | | | BLM18AG221SN1 | 220±25% | - | 200 | |
| | | | BLM18AG331SN1 | 330±25% | - | 200 | |
| | | | BLM18AG471SN1 | 470±25% | - | | |
| 0603 | For | Standard | BLM18AG601SN1 | 600±25% | - | | |
| | | | BLM18AG102SN1 | 1000±25% | - | 100 | |
| | | | BLM18TG121TN1 | 120±25% | - | | |
| | | | BLM18TG221TN1 | 220±25% | - | 200 | |
| | | | BLM18TG601TN1 | 600±25% | - | | |
| | 1 | | BLM18TG102TN1 | | — | | |

^{*} Please see p.64 "Derating of Rated Current".

Continued on the following page.



Continued from the preceding page.

| e (EIA Code) | | Туре | Part Number | Impeda | nce (Ω) | Rated Current (mA | |
|--------------|-----------------------|-----------------------|----------------|-----------|-------------|--------------------|--|
| C (LIA COUR) | | . 160 | i dit ivanibei | at 100MHz | at 1GHz | rated ourient (iii | |
| | | | BLM18BA050SN1 | E+250/ | - | 500 | |
| | | | BLM18BB050SN1 | 5±25% | - | 700 | |
| | | | BLM18BA100SN1 | 40.000 | - | | |
| | | | BLM18BB100SN1 | 10±25% | - | | |
| | | | BLM18BA220SN1 | | - | 500 | |
| | | | BLM18BB220SN1 | 22±25% | - | | |
| | | | BLM18BA470SN1 | | _ | 300 | |
| | | | BLM18BB470SN1 | 47±25% | - | 500 | |
| | | | | 201050/ | - | | |
| | | | BLM18BB600SN1 | 60±25% | - | 200 | |
| | | | BLM18BA750SN1 | 75±25% | - | 300 | |
| | | | BLM18BB750SN1 | | - | 200 | |
| | | | BLM18BA121SN1 | | - | | |
| | | | BLM18BB121SN1 | 120±25% | - | | |
| | | | BLM18BD121SN1 | | - | | |
| | For High | n Speed Signal | BLM18BB141SN1 | 140±25% | - | | |
| | | ance characteristics) | BLM18BB151SN1 | | - | | |
| | | | BLM18BD151SN1 | 150±25% | - | 200 | |
| | | | BLM18BB221SN1 | | - | _ | |
| | | | BLM18BD221SN1 | 220±25% | _ | | |
| | | | BLM18BB331SN1 | | - | | |
| | | | | 330±25% | - | | |
| | | | BLM18BD331SN1 | | - | _ | |
| | | | BLM18BD421SN1 | 420±25% | - | | |
| | | | BLM18BB471SN1 | 470±25% | - | 50 | |
| | | | BLM18BD471SN1 | 11022070 | - | 200 | |
| | | | BLM18BD601SN1 | 600±25% | - | 200 | |
| | | | BLM18BD102SN1 | 1000±25% | - | 100 | |
| 0603 | | | BLM18BD152SN1 | 1500±25% | - | | |
| | | | BLM18BD182SN1 | 1800±25% | - | | |
| | | | BLM18BD222SN1 | 2200±25% | _ | 50 | |
| 0003 | | | BLM18BD252SN1 | 2500±25% | | _ | |
| | | | BLM18RK121SN1 | | - | | |
| | For Digital Interface | | | 120±25% | - | _ | |
| | | | BLM18RK221SN1 | 220±25% | - | _ | |
| | | | BLM18RK471SN1 | 470±25% | - | 200 | |
| | | | BLM18RK601SN1 | 600±25% | - | | |
| | | | BLM18RK102SN1 | 1000±25% | - | | |
| | | | BLM18PG300SN1 | 30 (Typ.) | - | 1000 | |
| | | | BLM18PG330SN1 | 33±25% | - | 3000* | |
| | | | BLM18PG600SN1 | 60 (Typ.) | - | 500 | |
| | | _ | BLM18PG121SN1 | 120±25% | - | 2000* | |
| | | For Standard | BLM18PG181SN1 | 180±25% | - | 1500* | |
| | | | BLM18PG221SN1 | 220±25% | - | 1400* | |
| | For Large | | BLM18PG331SN1 | 330±25% | - | 1200* | |
| | Current | | BLM18PG471SN1 | | - | | |
| | | | | 471±25% | - | 1000 | |
| | | | BLM18SG260TN1 | 26±25% | - | 6000* | |
| | | For Standard | BLM18SG700TN1 | 70±25% | - | 4000* | |
| | | (Low DC | BLM18SG121TN1 | 120±25% | - | 3000* | |
| | | Resistance Type) | BLM18SG221TN1 | 220±25% | - | 2500* | |
| | | | BLM18SG331TN1 | 330±25% | - | 1500* | |
| | | | BLM18HG471SN1 | 470±25% | 600 (Typ.) | 000 | |
| | | For Standard | BLM18HG601SN1 | 600±25% | 700 (Typ.) | 200 | |
| | | | BLM18HG102SN1 | 1000±25% | 1000 (Typ.) | 100 | |
| | | | BLM18HB121SN1 | 120±25% | 500±40% | 200 | |
| | GHz Range | | BLM18HB221SN1 | 220±25% | 1100±40% | 100 | |
| | GLIZ Kaliye | | BLM18HB331SN1 | | | | |
| | | For High Speed | | 330±25% | 1600±40% | 50 | |
| | | Signal | BLM18HD471SN1 | 470±25% | 1000 (Typ.) | 100 | |
| | | | BLM18HD601SN1 | 600±25% | 1200 (Typ.) | | |
| | | _ | BLM18HD102SN1 | | 1700 (Typ.) | | |

^{*} Please see p.59 "Derating of Rated Current".



Continued from the preceding page.

| ize (inches) | | Туре | Part Number | Impeda | | Rated Current (mA | |
|--------------|-----------|---|---------------|-------------|------------|--------------------|--|
| (| | 71- | | at 100MHz | at 1GHz | Table Carrotte (II | |
| | | | BLM18HK331SN1 | 330±25% | 400±40% | 200 | |
| | | For Digital | BLM18HK471SN1 | 470±25% | 600±40% | 200 | |
| | | Interface | BLM18HK601SN1 | 600±25% | 700±40% | 100 | |
| | | | BLM18HK102SN1 | 1000±25% | 1200±40% | 50 | |
| | | | BLM18EG101TN1 | 100±25% | 140 (Typ.) | 2000* | |
| | | | BLM18EG121SN1 | 120±25% | 145 (Typ.) | 2000* | |
| 0603 | GHz Range | | BLM18EG221TN1 | 220±25% | 300 (Typ.) | 1000 | |
| | | For Standard | BLM18EG221SN1 | 22022070 | 260 (Typ.) | 2000* | |
| | | (Low DC | BLM18EG331TN1 | 330±25% | 450 (Typ.) | 500 | |
| | | Resistance Type) | BLM18EG391TN1 | 390±25% | 520 (Typ.) | 500 | |
| | | | BLM18EG471SN1 | 470±25% | 550 (Typ.) | 500 | |
| | | | BLM18EG601SN1 | 600±25% | 700 (Typ.) | 500 | |
| | | | BLM18GG471SN1 | 470±25% | 1800±30% | 200 | |
| | | | BLM21AG121SN1 | 120±25% | - | | |
| | | | BLM21AG151SN1 | 150±25% | - | | |
| | | | BLM21AG221SN1 | 220±25% | - | | |
| | For | Standard | BLM21AG331SN1 | 330±25% | - | 200 | |
| | | | BLM21AG471SN1 | 470±25% | - | | |
| | | | BLM21AG601SN1 | 600±25% | - | | |
| | | | BLM21AG102SN1 | 1000±25% | - | | |
| | | | BLM21BB050SN1 | 5±25% | - | 500 | |
| | | | BLM21BB600SN1 | 60±25% | - | | |
| | | | BLM21BB750SN1 | 75±25% | - | | |
| | | | BLM21BB121SN1 | 120±25% | - | | |
| | | | BLM21BD121SN1 | 120:2070 | - | | |
| | | | BLM21BB151SN1 | 150±25% | - | | |
| | | | BLM21BD151SN1 | 130±2370 | - | | |
| | | | BLM21BB201SN1 | 200±25% | - | | |
| | | | BLM21BB221SN1 | 220±25% | - | | |
| | | | BLM21BD221SN1 | 220:2070 | - | | |
| | Fartis | - Cross Cianal | BLM21BB331SN1 | 330±25% | - | | |
| | | n Speed Signal ance characteristics) | BLM21BD331SN1 | 330±2370 | - | 200 | |
| 0805 | (6.10. pp | | BLM21BD421SN1 | 420±25% | - | | |
| 0003 | | | BLM21BB471SN1 | 470±25% | - | | |
| | | | BLM21BD471SN1 | 470±2576 | - | | |
| | | | BLM21BD601SN1 | 600±25% | - | | |
| | | | BLM21BD751SN1 | 750±25% | - | | |
| | | | BLM21BD102SN1 | 1000±25% | - | | |
| | | | BLM21BD152SN1 | 1500±25% | - | | |
| | | | BLM21BD182SN1 | 1800±25% | - | | |
| | | | BLM21BD222SN1 | 2250 (Typ.) | - | | |
| | | | BLM21BD222TN1 | 2200±25% | - | | |
| | | | BLM21BD272SN1 | 2700±25% | - | | |
| | | | BLM21RK121SN1 | 120±25% | - | | |
| | | | BLM21RK221SN1 | 220±25% | - | | |
| | For Dig | gital Interface | BLM21RK471SN1 | 470±25% | - | 200 | |
| | | | BLM21RK601SN1 | 600±25% | - | | |
| | | | BLM21RK102SN1 | 1000±25% | - | | |
| | | | BLM21PG220SN1 | 22±25% | - | 6000* | |
| | | | BLM21PG300SN1 | 30 (Typ.) | - | 2000* | |
| | For La | arge Current | BLM21PG600SN1 | 60±25% | | 3000* | |
| | | | BLM21PG221SN1 | 220±25% | - | 2000* | |
| | | | | | | | |

^{*} Please see p.59 "Derating of Rated Current".

je.

| \overline{A} | Continued | from | the | preceding | page |
|----------------|-----------|------|-----|-----------|------|
| | | | | | |

| Size (inches) | Type | Part Number | Impeda | Rated Current (mA) | | |
|---------------|-------------------|---------------|-----------|--------------------|----------------------|--|
| Size (inches) | Туре | Fait Number | at 100MHz | at 1GHz | Rated Current (IIIA) | |
| | | BLM31PG330SN1 | 33±25% | - | 6000* | |
| | | BLM31PG500SN1 | 50 (Typ.) | - | 00004 | |
| 1206 | For Large Current | BLM31PG121SN1 | 120±25% | - | 3000* | |
| | | BLM31PG391SN1 | 390±25% | - | 2000* | |
| | | BLM31PG601SN1 | 600±25% | - | 1500* | |
| | | BLM41PG600SN1 | 60 (Typ.) | - | 6000* | |
| | | BLM41PG750SN1 | 75 (Typ.) | - | 3000* | |
| 1806 | For Large Current | BLM41PG181SN1 | 180±25% | - | 3000* | |
| | | BLM41PG471SN1 | 470±25% | - | 2000* | |
| | | BLM41PG102SN1 | 1000±25% | - | 1500* | |

^{*} Please see p.59 "Derating of Rated Current".



sales representatives or product engineers before ordering.

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip Ferrite Beads BLM03/15/18/21/31/41 Series

■ Features (BLM_A Series)


The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted.


BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground.

The nickel barrier structure of the external electrodes provides excellent solder heat resistance. BLM_A series generates an impedance from the relatively low frequencies. Therefore BLM_A series is effective in noise suppression in a wide frequency range (30MHz to several hundred MHz). The small size of BLM03A series (0.6x0.3mm) is suitable for noise suppression in small equipment such as PA modules for cellular phones.

BLM03A Series (0201 Size)

■ Equivalent Circuit




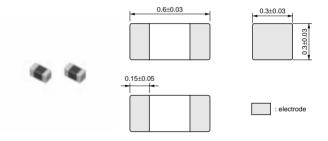



(in mm)


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM03AG100SN1 | 10 (Тур.) | 500 | 0.1 | -55 to +125 |
| BLM03AG700SN1 | 70 (Typ.) | 200 | 0.5 | -55 to +125 |
| BLM03AG121SN1 | 120 ±25% | 200 | 0.8 | -55 to +125 |
| BLM03AG241SN1 | 240 ±25% | 100 | 1.0 | -55 to +125 |
| BLM03AG601SN1 | 600 ±25% | 100 | 2.0 | -55 to +125 |


■ Impedance-Frequency (Typical)

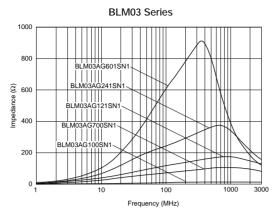


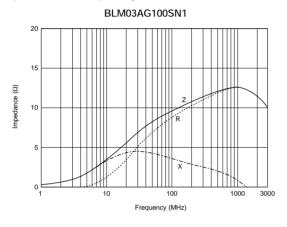

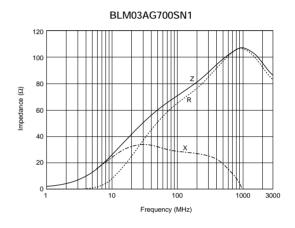


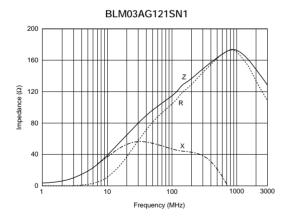

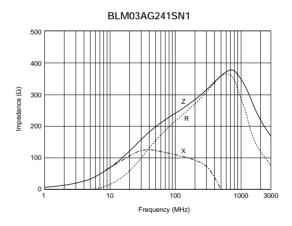

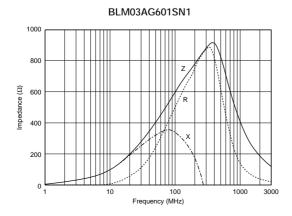


BLM15A Series (0402 Size)

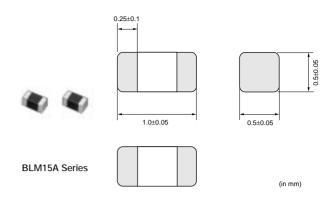

| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM15AG100SN1 | 10 (Тур.) | 1000 | 0.05 | -55 to +125 |
| BLM15AG700SN1 | 70 (Typ.) | 500 | 0.15 | -55 to +125 |
| BLM15AG121SN1 | 120 ±25% | 500 | 0.25 | -55 to +125 |
| BLM15AG221SN1 | 220 ±25% | 300 | 0.35 | -55 to +125 |
| BLM15AG601SN1 | 600 ±25% | 300 | 0.6 | -55 to +125 |
| BLM15AG102SN1 | 1000 ±25% | 200 | 1.0 | -55 to +125 |


■ Impedance-Frequency (Typical)

BLM15A Series

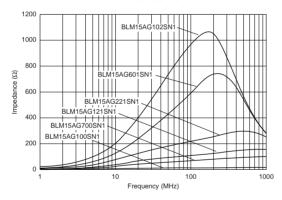

■ Impedance-Frequency Characteristics

BLM15AG100SN1 Impedance (Ω) Frequency (MHz)

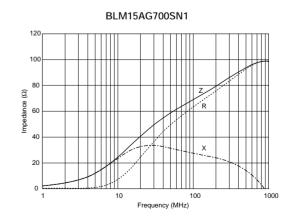

Continued on the following page.







Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


Continued from the preceding page.

■ Impedance-Frequency Characteristics

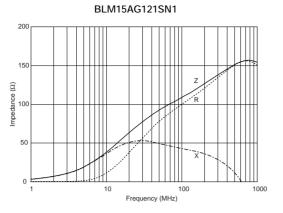


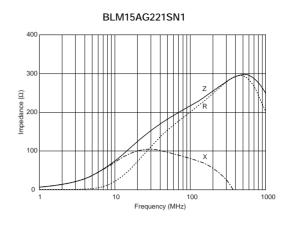

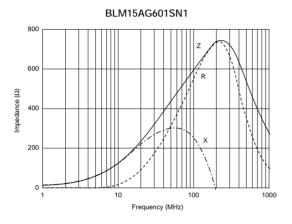

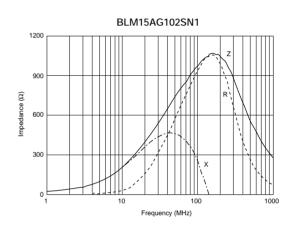


BLM18A Series (0603 Size)

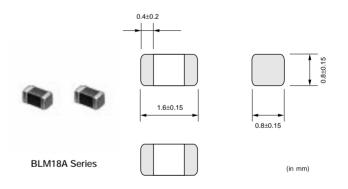



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------|-------------------------------|--|
| BLM18AG121SN1 | 120 ±25% | 200 | 0.20 | -55 to +125 |
| BLM18AG151SN1 | 150 ±25% | 200 | 0.25 | -55 to +125 |
| BLM18AG221SN1 | 220 ±25% | 200 | 0.30 | -55 to +125 |
| BLM18AG331SN1 | 330 ±25% | 200 | 0.45 | -55 to +125 |
| BLM18AG471SN1 | 470 ±25% | 200 | 0.50 | -55 to +125 |
| BLM18AG601SN1 | 600 ±25% | 200 | 0.50 | -55 to +125 |
| BLM18AG102SN1 | 1000 ±25% | 100 | 0.70 | -55 to +125 |


■ Impedance-Frequency (Typical)




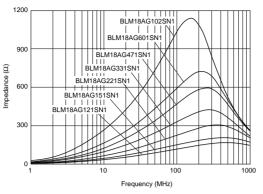


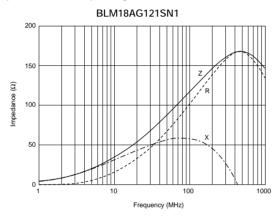


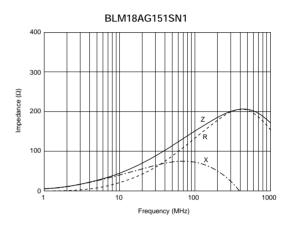

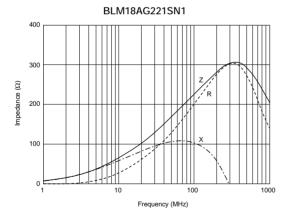

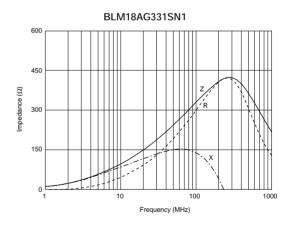


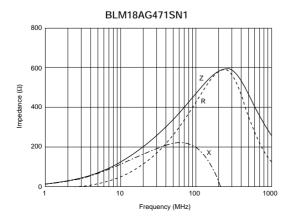

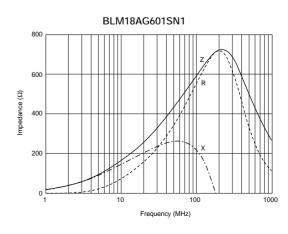


Continued from the preceding page.

■ Impedance-Frequency Characteristics

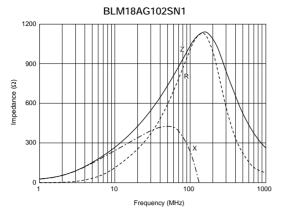



BLM21A Series (0805 Size)

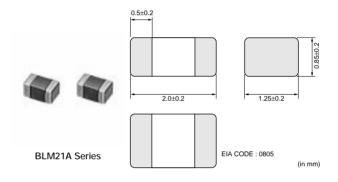



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------|-------------------------------|--|
| BLM21AG121SN1 | 120 ±25% | 200 | 0.15 | -55 to +125 |
| BLM21AG151SN1 | 150 ±25% | 200 | 0.15 | -55 to +125 |
| BLM21AG221SN1 | 220 ±25% | 200 | 0.20 | -55 to +125 |
| BLM21AG331SN1 | 330 ±25% | 200 | 0.25 | -55 to +125 |
| BLM21AG471SN1 | 470 ±25% | 200 | 0.25 | -55 to +125 |
| BLM21AG601SN1 | 600 ±25% | 200 | 0.30 | -55 to +125 |
| BLM21AG102SN1 | 1000 ±25% | 200 | 0.45 | -55 to +125 |


■ Impedance-Frequency (Typical)

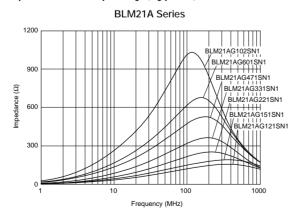


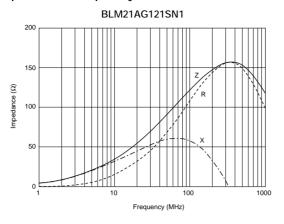


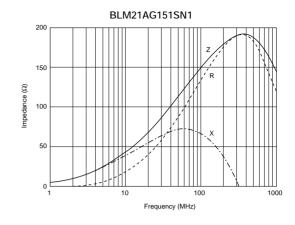


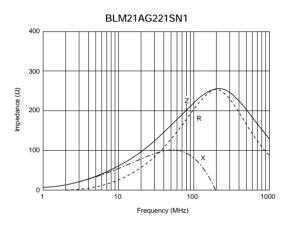

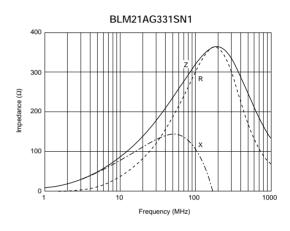

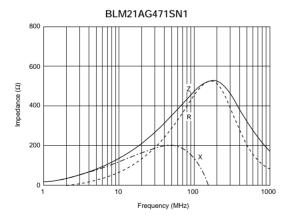

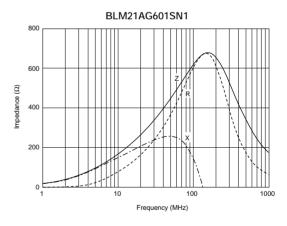

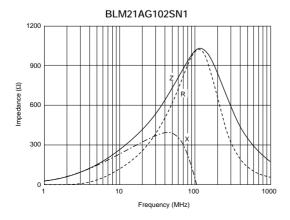

Note

• This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


BLM15A Series Gold Plating (0402 Size)

■ Features

- 1. Au plating for wire bonding mounting
- 2. BLM_A series generates an impedance from the relatively low frequencies. Therefore BLM_A series is effective in noise suppression in a wide frequency range (30MHz to several hundred MHz).

■ Applications


- 1. Optical transceiver modules
- 2. Optical pickup modules

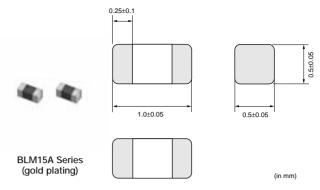



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM15AG601AN1 | 600 ±25% | 300 | 0.6 | -55 to +125 |
| BLM15AG102AN1 | 1000 ±25% | 200 | 1.0 | -55 to +125 |

■ Impedance-Frequency (Typical)

BLM15A Series (gold plating)

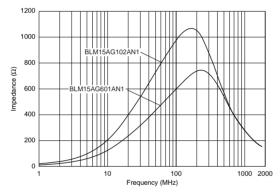

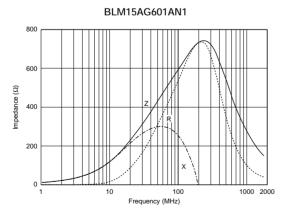

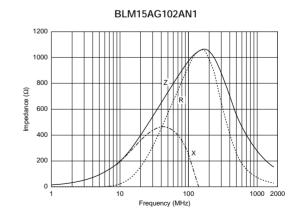


BLM18T Series (0603 Size)

■ Features

The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted.


BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground.

The nickel barrier structure of the external electrodes provides excellent solder heat resistance. BLM_T series generates an impedance from the relatively low frequencies. Therefore BLM_T series is effective in noise suppression in a wide frequency range (10MHz to several hundred MHz). BLM_T series contributes further to miniaturizing portable equipment.

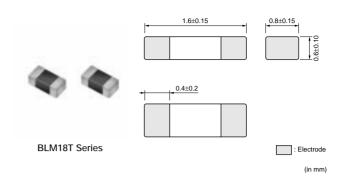



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM18TG121TN1 | 120 ±25% | 200 | 0.25 | -55 to +125 |
| BLM18TG221TN1 | 220 ±25% | 200 | 0.30 | -55 to +125 |
| BLM18TG601TN1 | 600 ±25% | 200 | 0.45 | -55 to +125 |
| BLM18TG102TN1 | 1000 ±25% | 100 | 0.60 | -55 to +125 |

■ Impedance-Frequency (Typical)

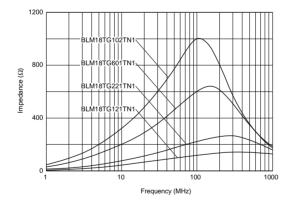

■ Impedance-Frequency Characteristics

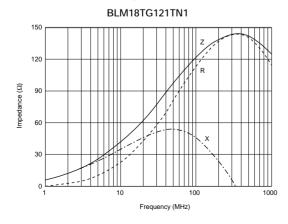

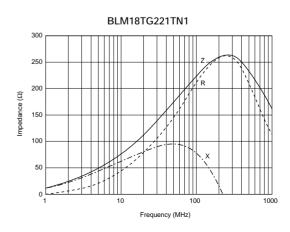



Continued on the following page.





Continued from the preceding page.

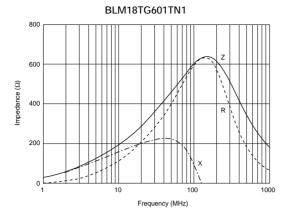

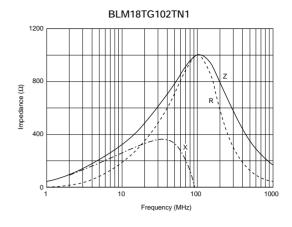

■ Features (BLM_B Series)

The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted.


BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground.


The nickel barrier structure of the external electrodes provides excellent solder heat resistance. BLM B series can minimize attenuation of the signal waveform due to its sharp impedance characteristics. Various impedances are available to match signal frequency.

The small size of BLM03B series (0.6x0.3mm) is suitable for advanced high-density mounting, and is followed on a miniaturization of digital equipment, or module of a functional portion.

BLM03B Series (0201 Size)

■ Equivalent Circuit




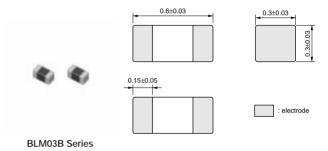


(in mm)

| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM03BB100SN1 | 10 ±25% | 300 | 0.4 | -55 to +125 |
| BLM03BB220SN1 | 22 ±25% | 200 | 0.5 | -55 to +125 |
| BLM03BB470SN1 | 47 ±25% | 200 | 0.7 | -55 to +125 |
| BLM03BB750SN1 | 75 ±25% | 200 | 1.0 | -55 to +125 |
| BLM03BB121SN1 | 120 ±25% | 100 | 1.5 | -55 to +125 |

■ Impedance-Frequency (Typical)

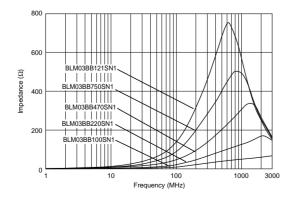

■ Impedance-Frequency Characteristics

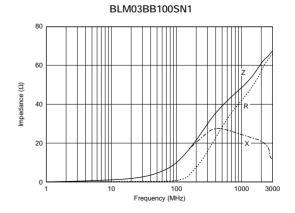

Continued on the following page.







Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


Continued from the preceding page.

■ Impedance-Frequency Characteristics

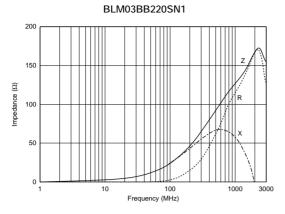


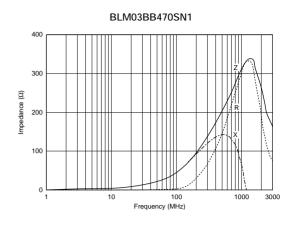

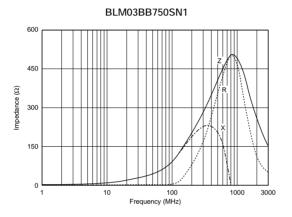

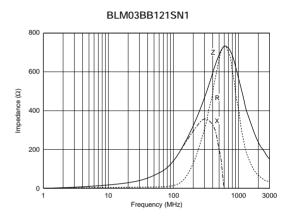



BLM15B Series (0402 Size)

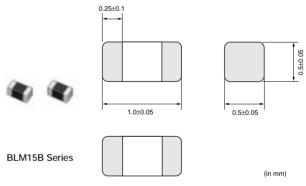



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------|----------------------------|--|
| BLM15BB050SN1 | 5 ±25% | 500 | 0.08 | -55 to +125 |
| BLM15BB100SN1 | 10 ±25% | 300 | 0.10 | -55 to +125 |
| BLM15BB220SN1 | 22 ±25% | 300 | 0.20 | -55 to +125 |
| BLM15BB470SN1 | 47 ±25% | 300 | 0.35 | -55 to +125 |
| BLM15BB750SN1 | 75 ±25% | 300 | 0.40 | -55 to +125 |
| BLM15BD750SN1 | 75 ±25% | 300 | 0.20 | -55 to +125 |
| BLM15BB121SN1 | 120 ±25% | 300 | 0.55 | -55 to +125 |
| BLM15BD121SN1 | 120 ±25% | 300 | 0.30 | -55 to +125 |
| BLM15BB221SN1 | 220 ±25% | 200 | 0.80 | -55 to +125 |
| BLM15BD221SN1 | 220 ±25% | 300 | 0.40 | -55 to +125 |
| BLM15BD471SN1 | 470 ±25% | 200 | 0.60 | -55 to +125 |
| BLM15BD601SN1 | 600 ±25% | 200 | 0.65 | -55 to +125 |
| BLM15BD102SN1 | 1000 ±25% | 200 | 0.90 | -55 to +125 |
| BLM15BD182SN1 | 1800 ±25% | 100 | 1.40 | -55 to +125 |


■ Impedance-Frequency (Typical)

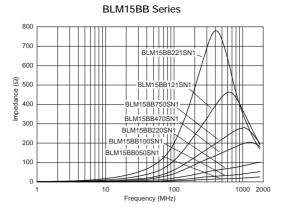


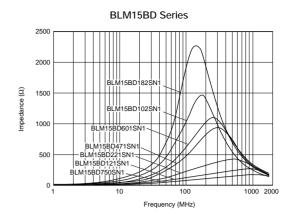


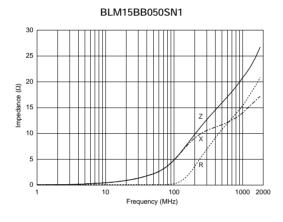


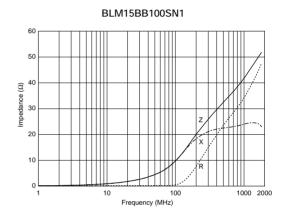

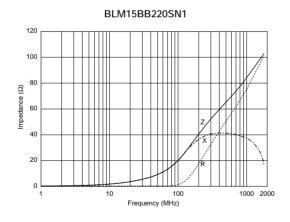

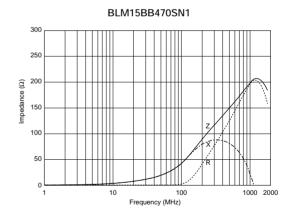

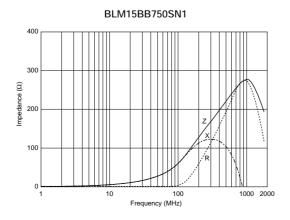

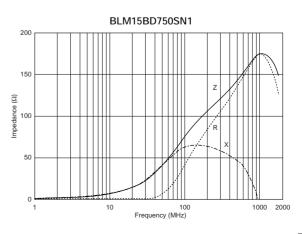






Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


Continued from the preceding page.

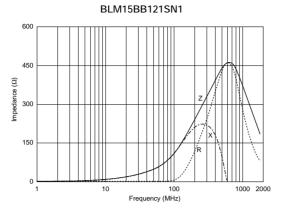


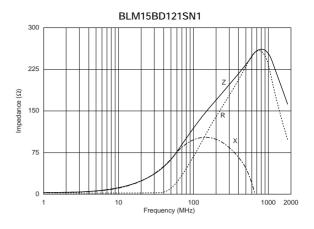


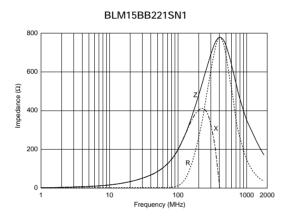


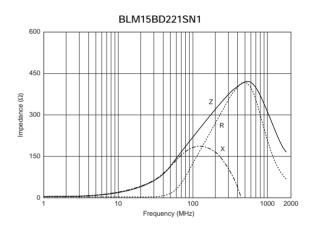

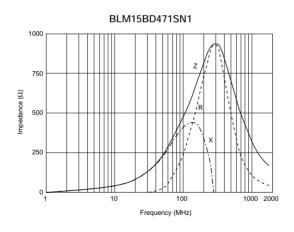


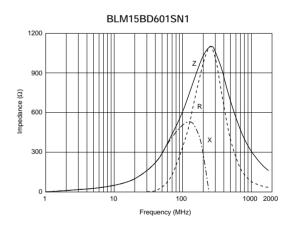

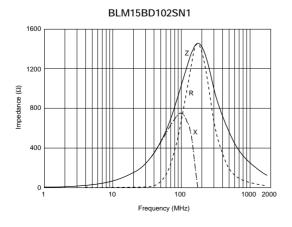

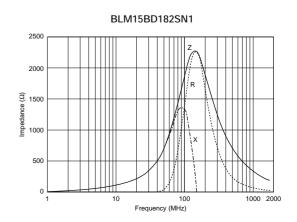



BLM18B Series (0603 Size)

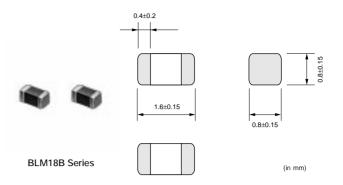



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------|-------------------------------|--|
| BLM18BA050SN1 | 5 ±25% | 500 | 0.20 | -55 to +125 |
| BLM18BB050SN1 | 5 ±25% | 700 | 0.10 | -55 to +125 |
| BLM18BA100SN1 | 10 ±25% | 500 | 0.25 | -55 to +125 |
| BLM18BB100SN1 | 10 ±25% | 500 | 0.15 | -55 to +125 |
| BLM18BA220SN1 | 22 ±25% | 500 | 0.35 | -55 to +125 |
| BLM18BB220SN1 | 22 ±25% | 500 | 0.25 | -55 to +125 |
| BLM18BA470SN1 | 47 ±25% | 300 | 0.55 | -55 to +125 |
| BLM18BB470SN1 | 47 ±25% | 500 | 0.30 | -55 to +125 |
| BLM18BB600SN1 | 60 ±25% | 200 | 0.35 | -55 to +125 |
| BLM18BA750SN1 | 75 ±25% | 300 | 0.70 | -55 to +125 |
| BLM18BB750SN1 | 75 ±25% | 200 | 0.35 | -55 to +125 |
| BLM18BA121SN1 | 120 ±25% | 200 | 0.90 | -55 to +125 |
| BLM18BB121SN1 | 120 ±25% | 200 | 0.50 | -55 to +125 |
| BLM18BD121SN1 | 120 ±25% | 200 | 0.40 | -55 to +125 |
| BLM18BB141SN1 | 140 ±25% | 200 | 0.55 | -55 to +125 |
| BLM18BB151SN1 | 150 ±25% | 200 | 0.55 | -55 to +125 |
| BLM18BD151SN1 | 150 ±25% | 200 | 0.40 | -55 to +125 |
| BLM18BB221SN1 | 220 ±25% | 200 | 0.65 | -55 to +125 |
| BLM18BD221SN1 | 220 ±25% | 200 | 0.45 | -55 to +125 |
| BLM18BB331SN1 | 330 ±25% | 200 | 0.75 | -55 to +125 |
| BLM18BD331SN1 | 330 ±25% | 200 | 0.50 | -55 to +125 |
| BLM18BD421SN1 | 420 ±25% | 200 | 0.55 | -55 to +125 |
| BLM18BB471SN1 | 470 ±25% | 50 | 1.00 | -55 to +125 |
| BLM18BD471SN1 | 470 ±25% | 200 | 0.55 | -55 to +125 |
| BLM18BD601SN1 | 600 ±25% | 200 | 0.65 | -55 to +125 |
| BLM18BD102SN1 | 1000 ±25% | 100 | 0.85 | -55 to +125 |
| BLM18BD152SN1 | 1500 ±25% | 50 | 1.20 | -55 to +125 |
| BLM18BD182SN1 | 1800 ±25% | 50 | 1.50 | -55 to +125 |
| BLM18BD222SN1 | 2200 ±25% | 50 | 1.50 | -55 to +125 |
| BLM18BD252SN1 | 2500 ±25% | 50 | 1.50 | -55 to +125 |


■ Impedance-Frequency (Typical)

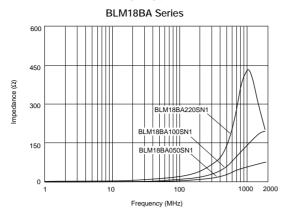


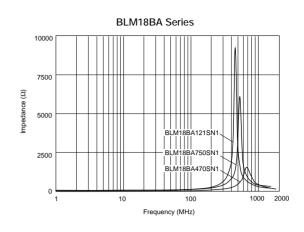


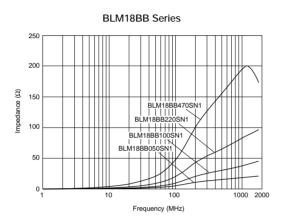

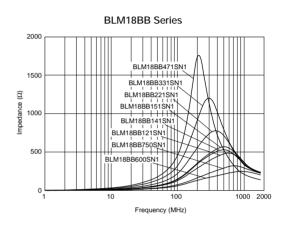

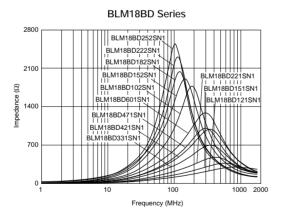


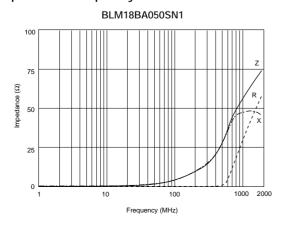


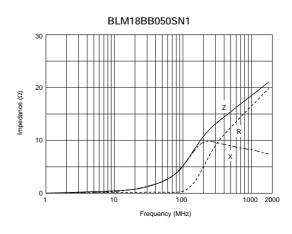






Continued from the preceding page.

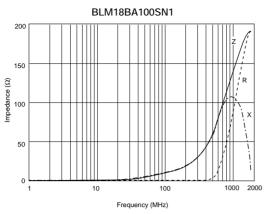


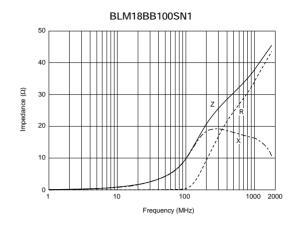


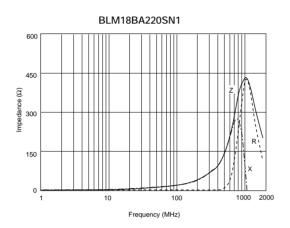


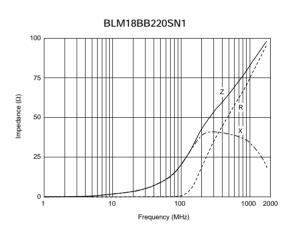


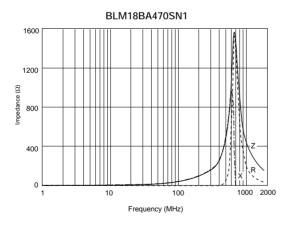


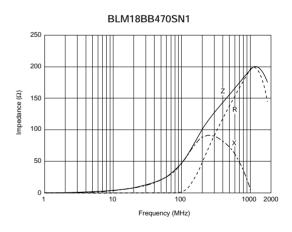


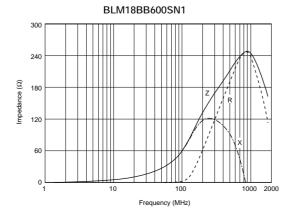


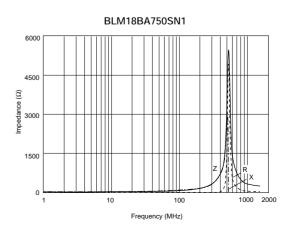


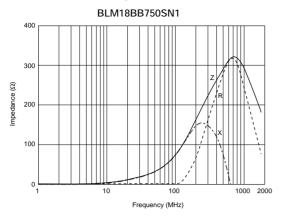


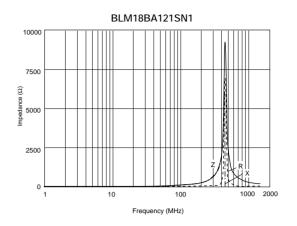


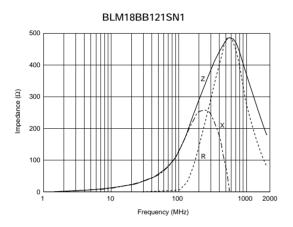


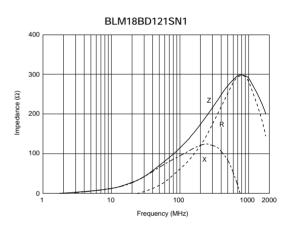

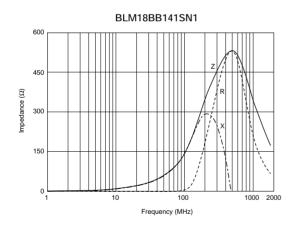


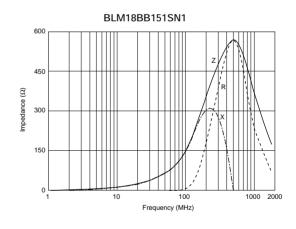


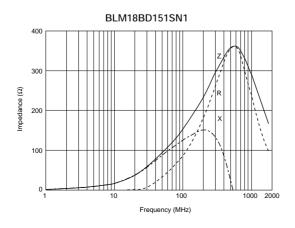


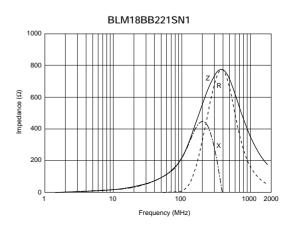



Continued from the preceding page.

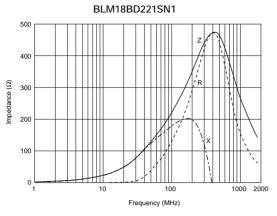


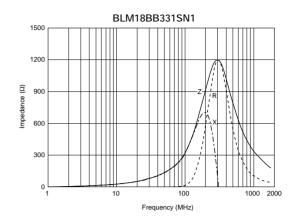


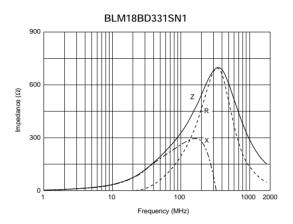


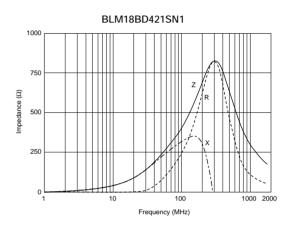

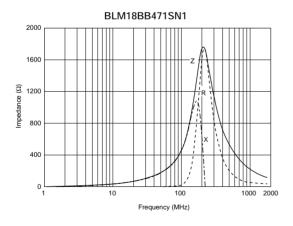

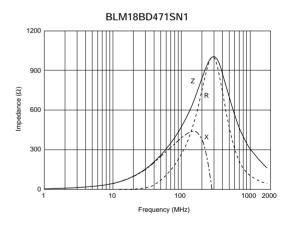


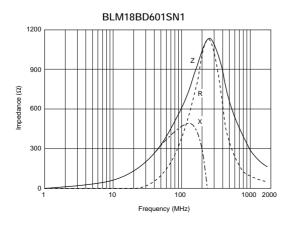


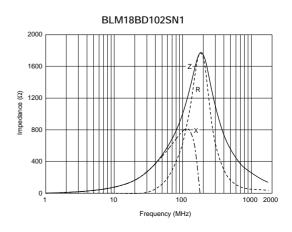





Continued from the preceding page.

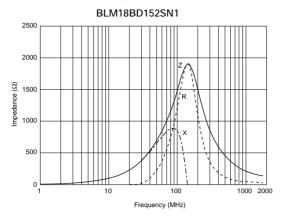


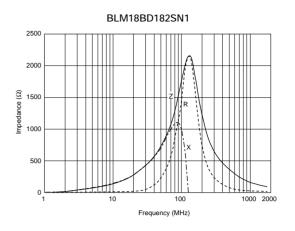

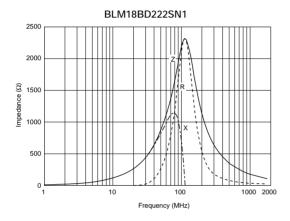

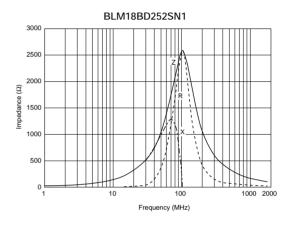



BLM21B Series (0805 Size)

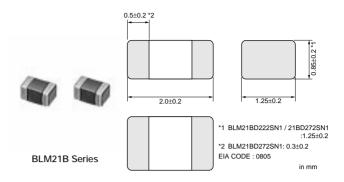

| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------|-------------------------------|--|
| BLM21BB050SN1 | 5 ±25% | 500 | 0.07 | -55 to +125 |
| BLM21BB600SN1 | 60 ±25% | 200 | 0.20 | -55 to +125 |
| BLM21BB750SN1 | 75 ±25% | 200 | 0.25 | -55 to +125 |
| BLM21BB121SN1 | 120 ±25% | 200 | 0.25 | -55 to +125 |
| BLM21BD121SN1 | 120 ±25% | 200 | 0.25 | -55 to +125 |
| BLM21BB151SN1 | 150 ±25% | 200 | 0.25 | -55 to +125 |
| BLM21BD151SN1 | 150 ±25% | 200 | 0.25 | -55 to +125 |
| BLM21BB201SN1 | 200 ±25% | 200 | 0.35 | -55 to +125 |
| BLM21BB221SN1 | 220 ±25% | 200 | 0.35 | -55 to +125 |
| BLM21BD221SN1 | 220 ±25% | 200 | 0.25 | -55 to +125 |
| BLM21BB331SN1 | 330 ±25% | 200 | 0.40 | -55 to +125 |
| BLM21BD331SN1 | 330 ±25% | 200 | 0.30 | -55 to +125 |
| BLM21BD421SN1 | 420 ±25% | 200 | 0.30 | -55 to +125 |
| BLM21BB471SN1 | 470 ±25% | 200 | 0.45 | -55 to +125 |
| BLM21BD471SN1 | 470 ±25% | 200 | 0.35 | -55 to +125 |
| BLM21BD601SN1 | 600 ±25% | 200 | 0.35 | -55 to +125 |
| BLM21BD751SN1 | 750 ±25% | 200 | 0.40 | -55 to +125 |
| BLM21BD102SN1 | 1000 ±25% | 200 | 0.40 | -55 to +125 |
| BLM21BD152SN1 | 1500 ±25% | 200 | 0.45 | -55 to +125 |
| BLM21BD182SN1 | 1800 ±25% | 200 | 0.50 | -55 to +125 |
| BLM21BD222TN1 | 2200 ±25% | 200 | 0.60 | -55 to +125 |
| BLM21BD222SN1 | 2250 (Typ.) | 200 | 0.60 | -55 to +125 |
| BLM21BD272SN1 | 2700 ±25% | 200 | 0.80 | -55 to +125 |

■ Impedance-Frequency (Typical)

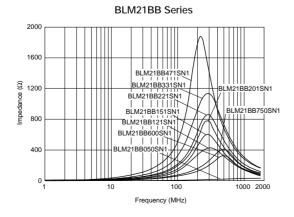

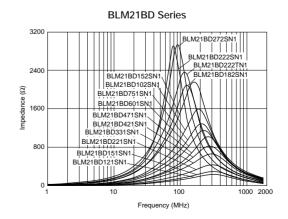



Continued on the following page.








Continued from the preceding page.

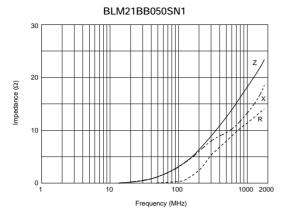


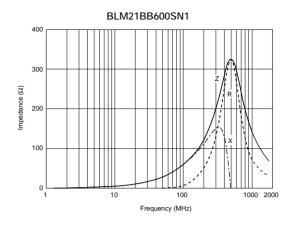


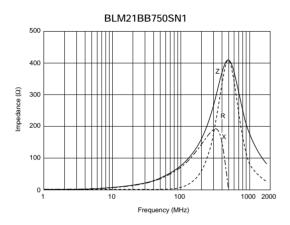


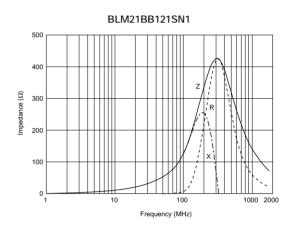

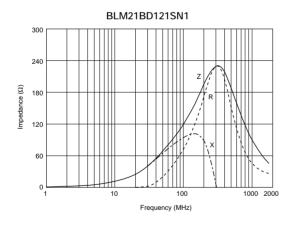


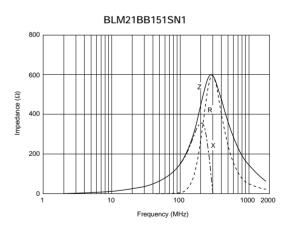


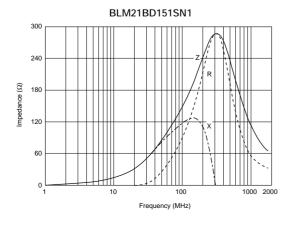


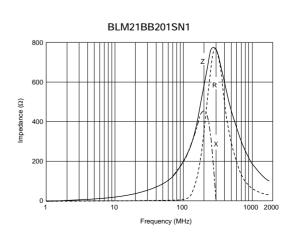



Continued from the preceding page. ■ Impedance-Frequency Characteristics

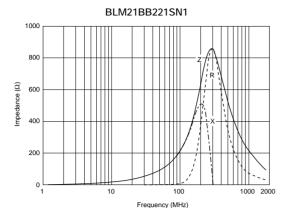


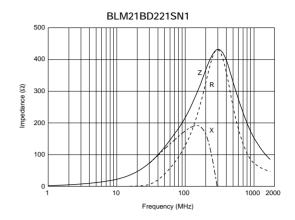


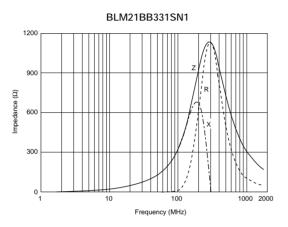


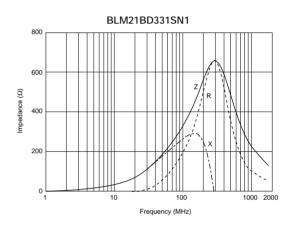

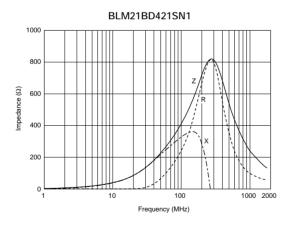

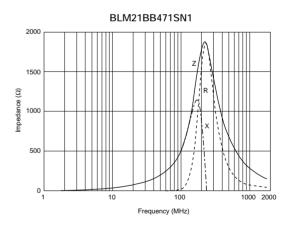

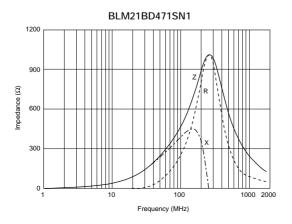

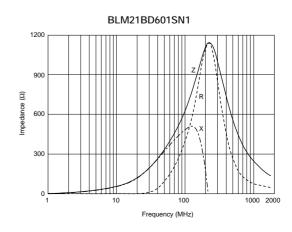






Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


Continued from the preceding page.

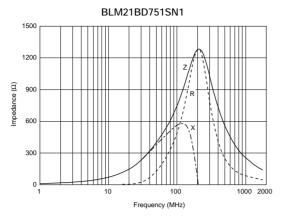


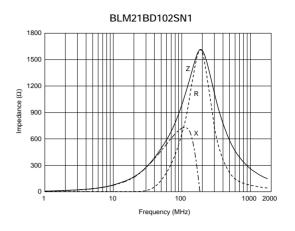


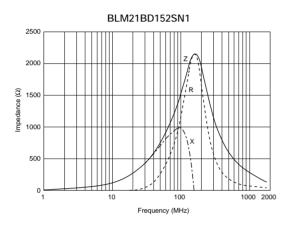

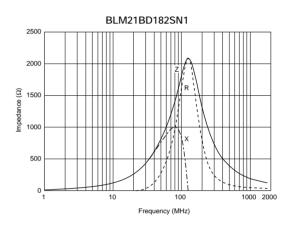

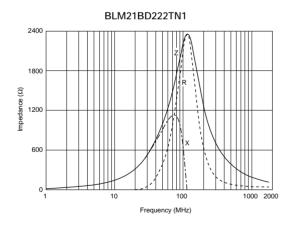

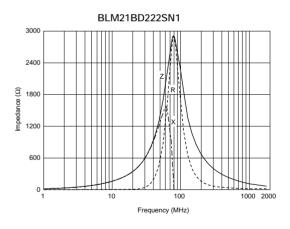

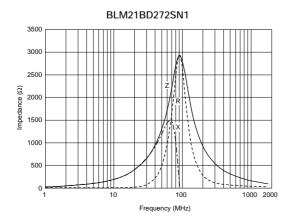

■ Features (BLM_R Series)


The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted.


BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground.

The nickel barrier structure of the external electrodes provides excellent solder heat resistance. BLM R series can be used in a digital Interface. Resistance of BLM_R series especially grows in the lower frequency range. Therefore BLM_R series is less effective for digital signal waveform at low frequency range and can suppress the ringing.

BLM18R Series (0603 Size)

■ Equivalent Circuit




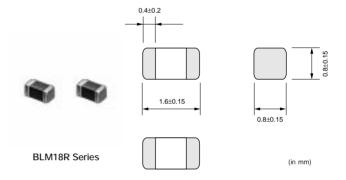



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------|-------------------------------|--|
| BLM18RK121SN1 | 120 ±25% | 200 | 0.25 | -55 to +125 |
| BLM18RK221SN1 | 220 ±25% | 200 | 0.30 | -55 to +125 |
| BLM18RK471SN1 | 470 ±25% | 200 | 0.50 | -55 to +125 |
| BLM18RK601SN1 | 600 ±25% | 200 | 0.60 | -55 to +125 |
| BLM18RK102SN1 | 1000 ±25% | 200 | 0.80 | -55 to +125 |


■ Impedance-Frequency (Typical)


BLM18R Series

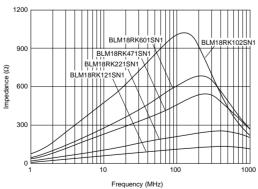


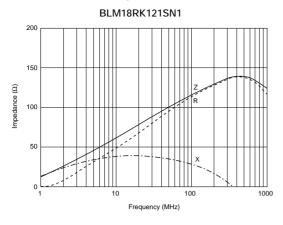

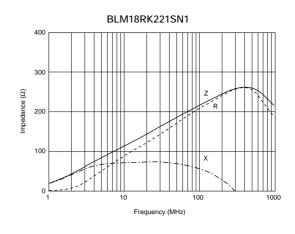


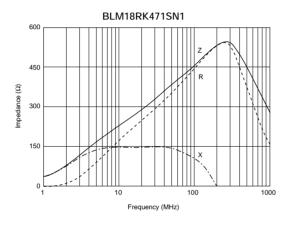

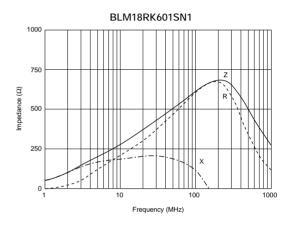

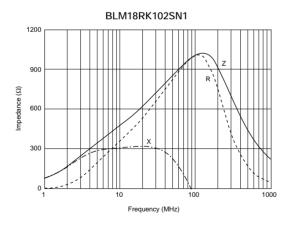


BLM21R Series (0805 Size)

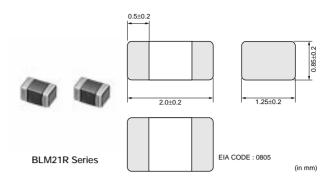


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM21RK121SN1 | 120 ±25% | 200 | 0.15 | -55 to +125 |
| BLM21RK221SN1 | 220 ±25% | 200 | 0.20 | -55 to +125 |
| BLM21RK471SN1 | 470 ±25% | 200 | 0.25 | -55 to +125 |
| BLM21RK601SN1 | 600 ±25% | 200 | 0.30 | -55 to +125 |
| BLM21RK102SN1 | 1000 ±25% | 200 | 0.50 | -55 to +125 |


■ Impedance-Frequency (Typical)

BLM21R Series

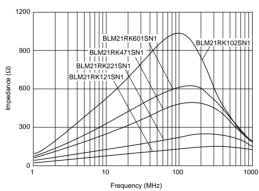

■ Impedance-Frequency Characteristics

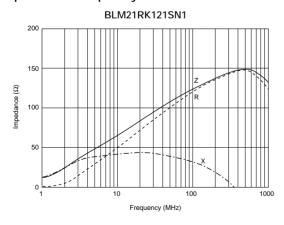

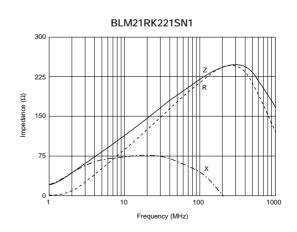

Continued on the following page.








Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

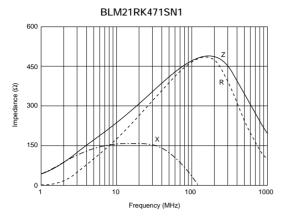


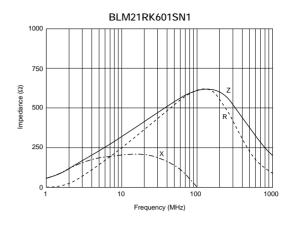


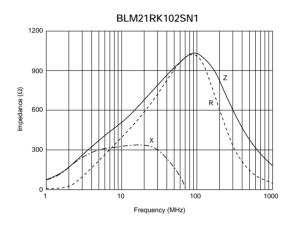

Noise Suppression Effect of BLM_R Series

■Waveform Distortion Suppressing Performance of BLM□□R Series

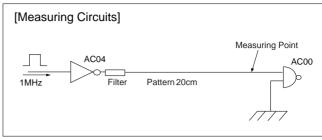

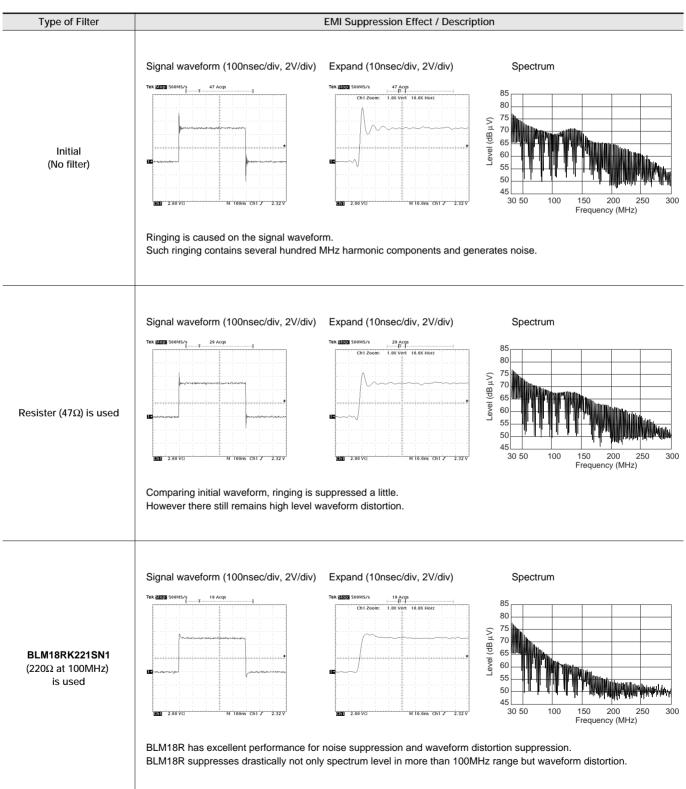

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications.

■ Features (BLM_P Series)

The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted.


BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground.


The nickel barrier structure of the external electrodes provides excellent solder heat resistance. BLM_P series can be used in high current circuits due to its low DC resistance. It can match power lines to a maximum of 6A DC.

The small size of BLM03A series (0.6x0.3mm) is suitable for noise suppression in small equipment such as PA modules for cellular phones.

BLM03P Series (0201 Size)

■ Equivalent Circuit

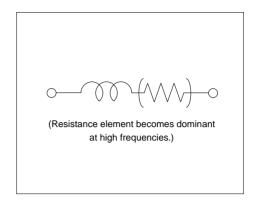

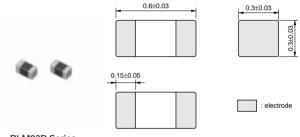


BLM03P Series

(in mm)


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------|-------------------------------|--|
| BLM03PG220SN1 | 22 ±25% | 900 | 0.065 | -55 to +125 |
| BLM03PG330SN1 | 33 ±25% | 750 | 0.090 | -55 to +125 |


■ Impedance-Frequency (Typical)

BLM03P Series

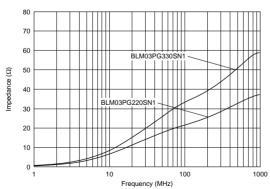


■ Impedance-Frequency Characteristics

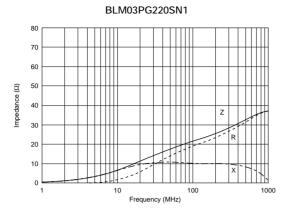

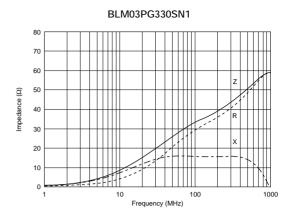

BLM15P Series (0402 Size)

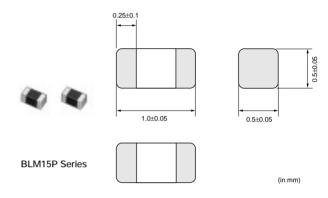


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM15PG100SN1 | 10 (Typ.) | 1000 | 0.05 | -55 to +125 |

■ Impedance-Frequency Characteristics

BLM15PG100SN1 Impedance (Ω) Frequency (MHz)

Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

BLM18P Series (0603 Size)

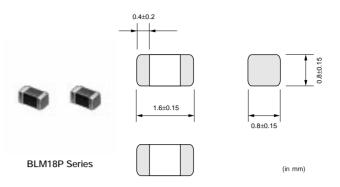


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM18PG300SN1 | 30 (Тур.) | 1000 | 0.05 | -55 to +125 |
| BLM18PG330SN1 | 33 ±25% | 3000 | 0.025 | -55 to +125 |
| BLM18PG600SN1 | 60 (Typ.) | 500 | 0.10 | -55 to +125 |
| BLM18PG121SN1 | 120 ±25% | 2000 | 0.05 | -55 to +125 |
| BLM18PG181SN1 | 180 ±25% | 1500 | 0.09 | -55 to +125 |
| BLM18PG221SN1 | 220 ±25% | 1400 | 0.10 | -55 to +125 |
| BLM18PG331SN1 | 330 ±25% | 1200 | 0.15 | -55 to +125 |
| BLM18PG471SN1 | 470 ±25% | 1000 | 0.20 | -55 to +125 |


At rated current higher than 1200mA, derating is required. Please refer to p.59, "Derating of Rated Current".

■ Impedance-Frequency (Typical)

BLM18P Series 600 BLM18PG471SN1 BLM18PG331SN1 BLM18PG221SN1 450 BLM18PG181SN1 Impedance (Ω) 300 BLM18PG330SN 150 Frequency (MHz)

■ Impedance-Frequency Characteristics

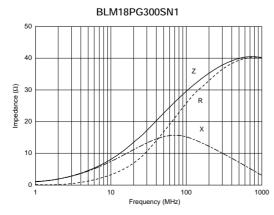


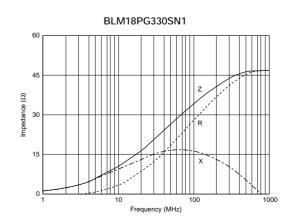



Continued on the following page.







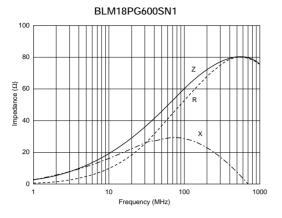


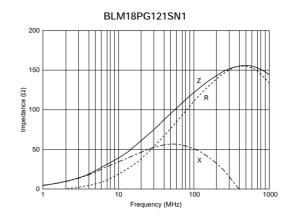

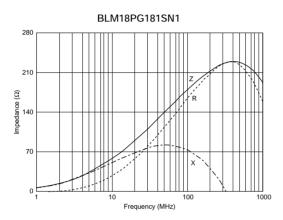

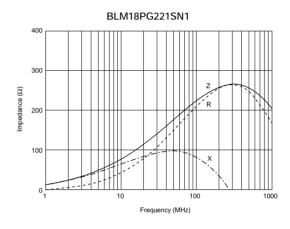


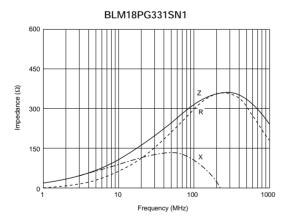

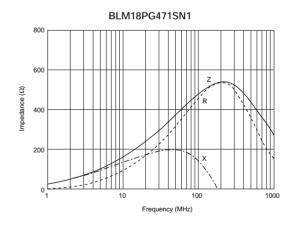

Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


BLM21P Series (0805 Size)

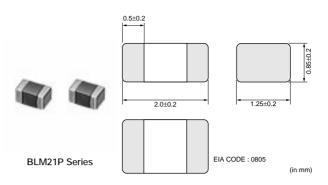


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM21PG220SN1 | 22 ±25% | 6000 | 0.01 | -55 to +125 |
| BLM21PG300SN1 | 30 (Тур.) | 3000 | 0.015 | -55 to +125 |
| BLM21PG600SN1 | 60 ±25% | 3000 | 0.025 | -55 to +125 |
| BLM21PG221SN1 | 220 ±25% | 2000 | 0.050 | -55 to +125 |
| BLM21PG331SN1 | 330 ±25% | 1500 | 0.09 | -55 to +125 |


At rated current higher than 1500mA, derating is required. Please refer to p.59, "Derating of Rated Current".

■ Impedance-Frequency (Typical)

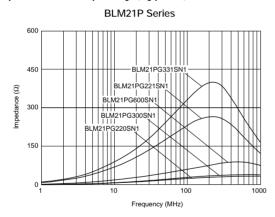

■ Impedance-Frequency Characteristics

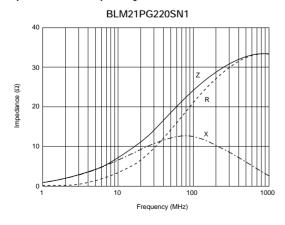


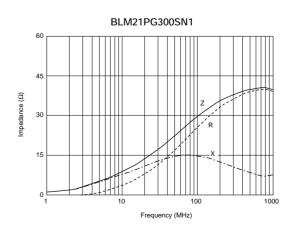



Continued on the following page.




■ Impedance-Frequency Characteristics

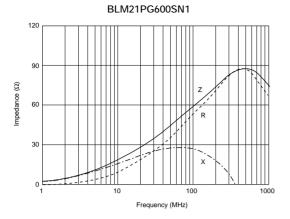

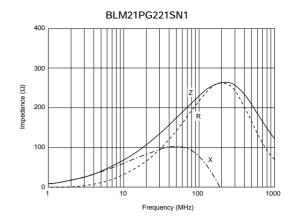

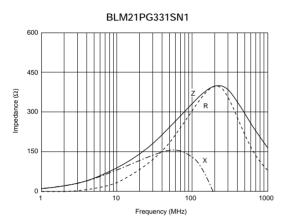

BLM31P Series (1206 Size)

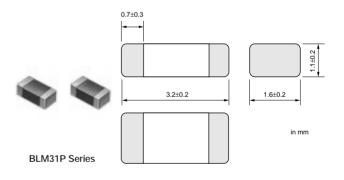

| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM31PG330SN1 | 33 ±25% | 6000 | 0.01 | -55 to +125 |
| BLM31PG500SN1 | 50 (Typ.) | 3000 | 0.025 | -55 to +125 |
| BLM31PG121SN1 | 120 ±25% | 3000 | 0.025 | -55 to +125 |
| BLM31PG391SN1 | 390 ±25% | 2000 | 0.05 | -55 to +125 |
| BLM31PG601SN1 | 600 ±25% | 1500 | 0.09 | -55 to +125 |


At rated current higher than 1500mA, derating is required.


Please refer to p.59, "Derating of Rated Current".





Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


■ Impedance-Frequency (Typical)

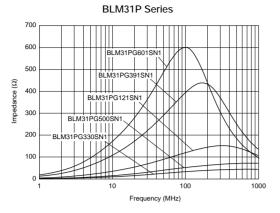


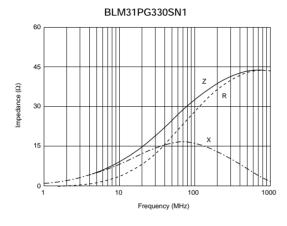

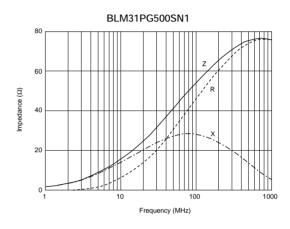


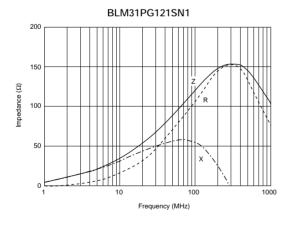

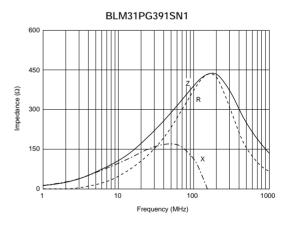

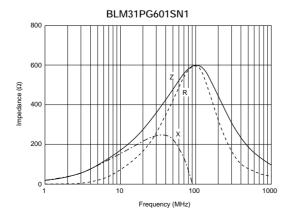

BLM41P Series (1806 Size)

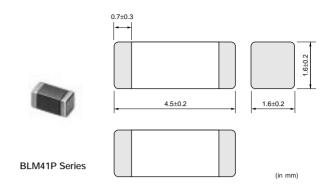

| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM41PG600SN1 | 60 (Typ.) | 6000 | 0.01 | -55 to +125 |
| BLM41PG750SN1 | 75 (Typ.) | 3000 | 0.025 | -55 to +125 |
| BLM41PG181SN1 | 180 ±25% | 3000 | 0.025 | -55 to +125 |
| BLM41PG471SN1 | 470 ±25% | 2000 | 0.05 | -55 to +125 |
| BLM41PG102SN1 | 1000 ±25% | 1500 | 0.09 | -55 to +125 |


At rated current higher than 1500mA, derating is required. Please refer to p.59, "Derating of Rated Current".


■ Impedance-Frequency (Typical)

BLM41P Series (60-180ohm) Impedance (Ω) 50 BLM41PG600 Frequency (MHz)

BLM41P Series (470-1000ohm) 1200 BLM41PG102 Impedance (Ω) 300 100 Frequency (MHz)

■ Impedance-Frequency Characteristics

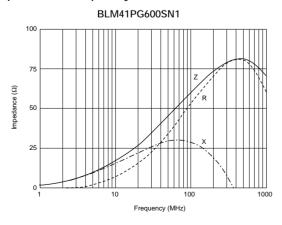

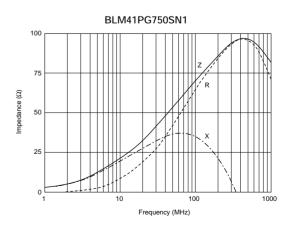

Continued on the following page. $\begin{tabular}{|c|c|c|c|}\hline \end{tabular}$






⚠Note


• This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

■ Impedance-Frequency Characteristics

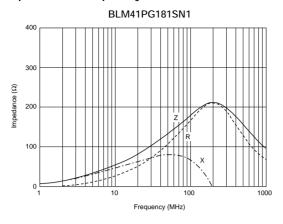

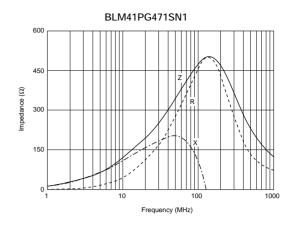

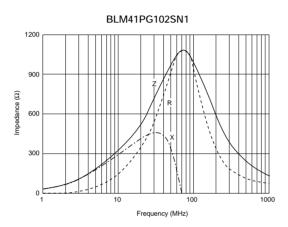


BLM18S Series (0603 Size)

■ Features

- 1. Low DC Resistance/Large Rated Current
- 2. BLM18S series can be used in high current circuits due to its low DC resistance. It can match power lines to a maximum of 6A DC.
- 3. Ni+Sn plating structure of the extenal electrodes provides excellent solder heat resistance.

■ Applications

EMI suppression for DC power line

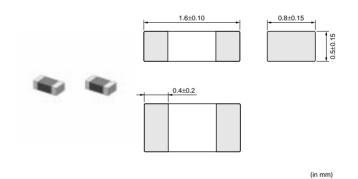



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLM18SG260TN1 | 26 ±25% | 6000 | 0.007 | -55 to +125 |
| BLM18SG700TN1 | 70 ±25% | 4000 | 0.020 | -55 to +125 |
| BLM18SG121TN1 | 120 ±25% | 3000 | 0.025 | -55 to +125 |
| BLM18SG221TN1 | 220 ±25% | 2500 | 0.040 | -55 to +125 |
| BLM18SG331TN1 | 330 ±25% | 1500 | 0.070 | -55 to +125 |


At rated current higher than 1500mA, derating is required.


Please refer to p.59, "Derating of Rated Current".


■ Impedance-Frequency (Typical)

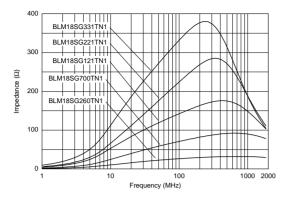


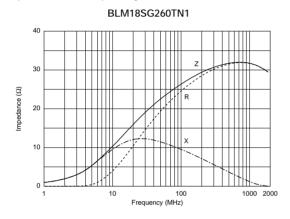

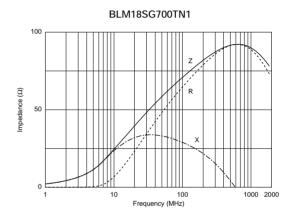

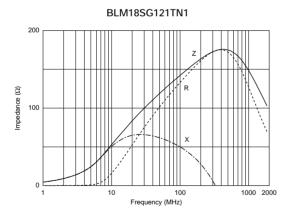

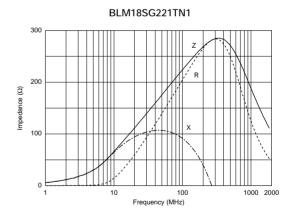

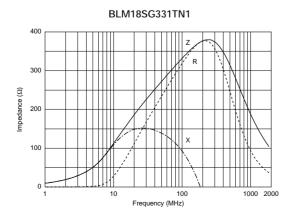




Continued from the preceding page.

■ Notice (Rating)

In operating temperatures exceeding +85℃, derating of current is necessary for chip Ferrite Beads for which rated current is 1200mA or over. Please apply the derating curve shown in chart according to the operating temperature.

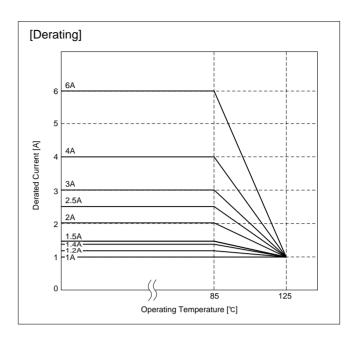



On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



GHz Noise Suppression Chip Ferrite Beads BLM15H/15E/18H/18E/18G Series

Excellent high frequency impedance characteristics with 0402 (EIA) size.

■ Features (BLM15HG/HD/EG Series)

- 1. Small size: 1.0x0.5mm (0402)
- 2. Suitable for noise suppression in 1GHz or higher frequency
- 3. Low DC Resistance/Large Rated Current (BLM15E)
- 4. No Lead production using Ni+Sn plating in termination

Applications

- 1. EMI suppression for Note PC and DSC
- 2. Noise suppression for data line in mobile phone
- 3. Prevention of erroneous operation caused by local oscillation signal in mobile phone
- 4. Optical pickup modules

■ Features (BLM15HB Series)


- 1. Small size: 1.0x0.5mm
- Suitable for noise suppression in 1GHz or higher frequency
- 3. No Lead production using Ni+Sn plating in termination


■ Applications

- 1. EMI suppression for Note PC and DSC
- 2. Noise suppression for data line in mobile phone
- Noise suppression for USB interface line in mobile phone
- 4. Prevention of erroneous operation caused by local oscillation signal in mobile phone

BLM15H Series (0402 Size)

■ Equivalent Circuit



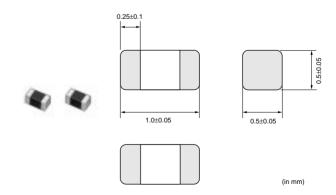


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Impedance (at 1GHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------------------------|-----------------------|-------------------------------|--|
| BLM15HG601SN1 | 600 ±25% | 1000 ±40% | 300 | 0.7 | -55 to +125 |
| BLM15HG102SN1 | 1000 ±25% | 1400 ±40% | 250 | 1.1 | -55 to +125 |
| BLM15HB121SN1 | 120 ±25% | 500 ±40% | 300 | 0.7 | -55 to +125 |




| Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. | C |
|---|-----|
| This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering the product specifications or transact the provided specifications before ordering the product specifications or transact the provided specifications before ordering the product specification or transact the provided specifications before ordering the product specification or transact the provided specification or transact the | ng. |
| Continued from the preceding page. | |

| Part Number | Impedance (at 100MHz/20°C) (ohm) | Impedance (at 1GHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------------------------|-----------------------|-------------------------------|--|
| BLM15HB221SN1 | 220 ±25% | 900 ±40% | 250 | 1.0 | -55 to +125 |
| BLM15HD601SN1 | 600 ±25% | 1400 ±40% | 300 | 0.85 | -55 to +125 |
| BLM15HD102SN1 | 1000 ±25% | 2000 ±40% | 250 | 1.25 | -55 to +125 |
| BLM15HD182SN1 | 1800 ±25% | 2700 ±40% | 200 | 2.2 | -55 to +125 |


■ Impedance-Frequency (Typical)

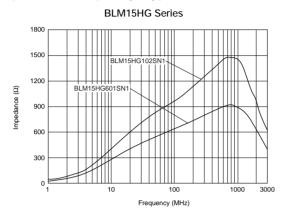


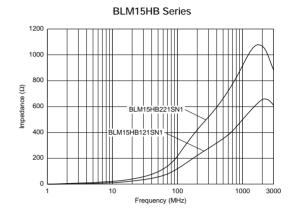

BLM15HD Series 4000 3000 2000 1000 10 100 1000 Frequency (MHz)

■ Impedance-Frequency Characteristics

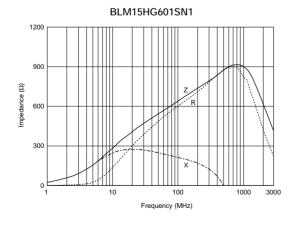


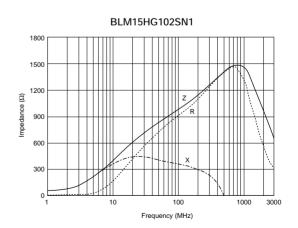



Continued on the following page.





Continued from the preceding page.

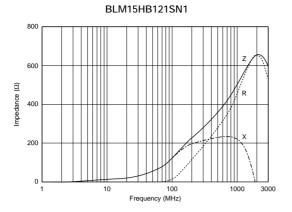

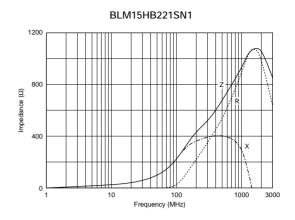

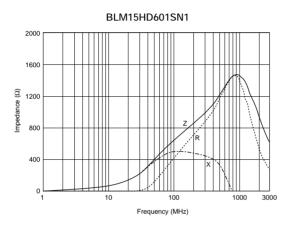


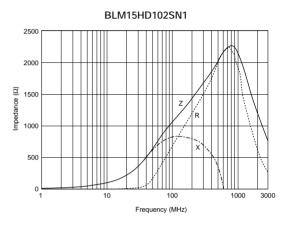

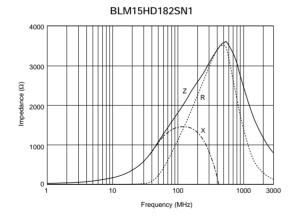

Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


BLM15E Series (0402 Size)

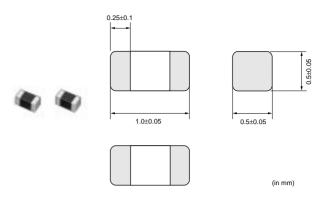


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Impedance (at 1GHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------------------------|-----------------------|----------------------------|--|
| BLM15EG121SN1 | 120 ±25% | 145 (Typ.) | 1500 | 0.095 | -55 to +125 |
| BLM15EG221SN1 | 220 ±25% | 270 (Typ.) | 700 | 0.28 | -55 to +125 |


In operating temperature exceeding +85°C, derating of current is necessary for BLM15E series.

■ Impedance-Frequency (Typical)

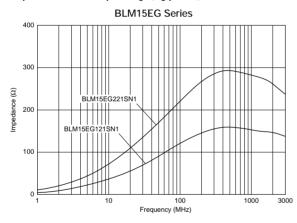

■ Impedance-Frequency Characteristics

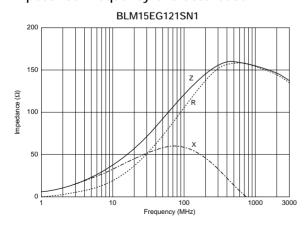

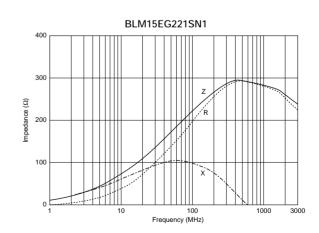

Continued on the following page.






Please refer to p.64, "Derating of Rated Current".

■ Notice (Rating)

In operating temperature exceeding +85°C, derating of current is necessary for BLM15E series.

Please apply the derating curve shown in chart according to the operating temperature.

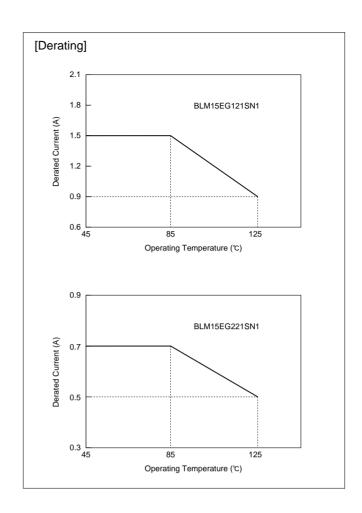

sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

■ BLM18 Series

BLM18H/BLM18E series has a modified internal electrode structure, that minimizes stray capacitance and increases the effective frequency range.

■ Features (BLM18H series)


- BLM18H series realizes high impedance at 1GHz and is suitable for noise suppression from 500MHz to GHz range. The impedance value of HG/HD-type is about three times as large as that of A/B-type at 1GHz, though the impedance characteristic of HG/HD-type is similar to A/B-type at 100MHz or less.
- 2. HG-type is effective in noise suppression in wide frequency range (several MHz to several GHz). HB/HD-type for high-speed signal line provides a sharper roll-off after the cut-off frequency. HK-type for digital interface is effective in suppressing the ringing because resistance especially grows in the lower frequency.
- 3. The magnetic shielded structure minimizes crosstalk.


■ Features (BLM18E series)

- Low DC Resistance and a large Rated Current are suitable for noise suppression of the driver circuit.
- 2. Excellent direct current characteristics
- 3. Thin type (t=0.5mm) is suitable for small and low profile equipment such as DSC, cellular phones.

BLM18H Series (0603 Size)


■ Equivalent Circuit

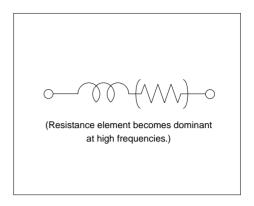


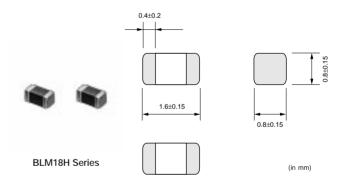



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Impedance (at 1GHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------------------------|-----------------------|-------------------------------|--|
| BLM18HG471SN1 | 470 ±25% | 600 (Typ.) | 200 | 0.85 | -55 to +125 |
| BLM18HG601SN1 | 600 ±25% | 700 (Typ.) | 200 | 1.00 | -55 to +125 |
| BLM18HG102SN1 | 1000 ±25% | 1000 (Typ.) | 100 | 1.60 | -55 to +125 |
| BLM18HB121SN1 | 120 ±25% | 500 ±40% | 200 | 0.50 | -55 to +125 |
| BLM18HB221SN1 | 220 ±25% | 1100 ±40% | 100 | 0.80 | -55 to +125 |
| BLM18HB331SN1 | 330 ±25% | 1600 ±40% | 50 | 1.20 | -55 to +125 |
| BLM18HD471SN1 | 470 ±25% | 1000 (Typ.) | 100 | 1.20 | -55 to +125 |
| BLM18HD601SN1 | 600 ±25% | 1200 (Typ.) | 100 | 1.50 | -55 to +125 |
| BLM18HD102SN1 | 1000 ±25% | 1700 (Typ.) | 50 | 1.80 | -55 to +125 |
| BLM18HK331SN1 | 330 ±25% | 400 ±40% | 200 | 0.50 | -55 to +125 |
| BLM18HK471SN1 | 470 ±25% | 600 ±40% | 200 | 0.70 | -55 to +125 |
| BLM18HK601SN1 | 600 ±25% | 700 ±40% | 100 | 0.90 | -55 to +125 |
| BLM18HK102SN1 | 1000 ±25% | 1200 ±40% | 50 | 1.50 | -55 to +125 |


■ Impedance-Frequency (Typical)

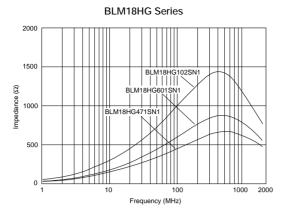


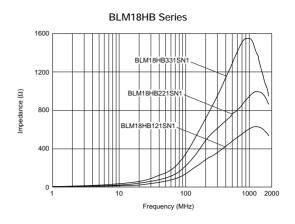


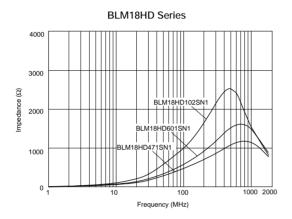


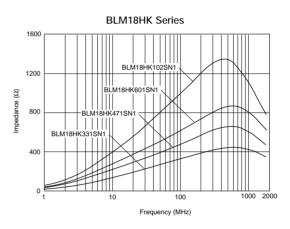

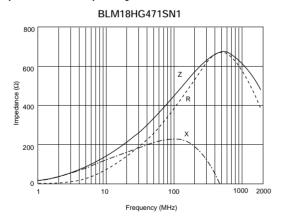

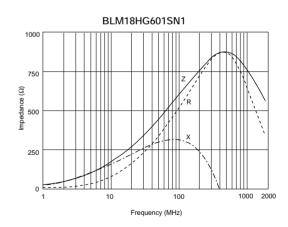

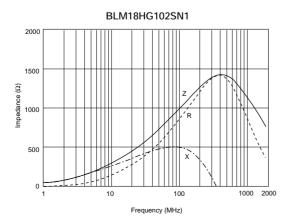

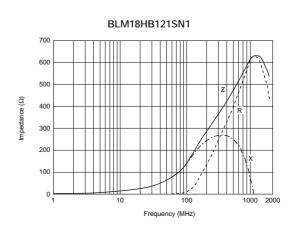






Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


Continued from the preceding page.

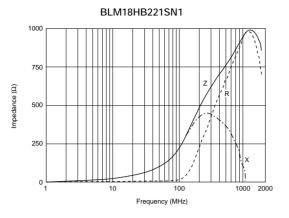


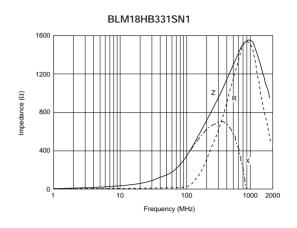


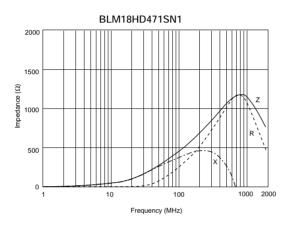


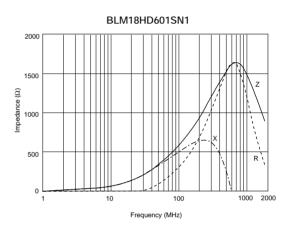

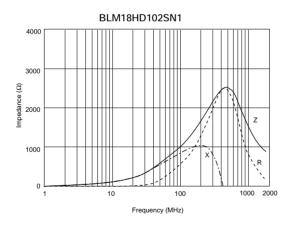


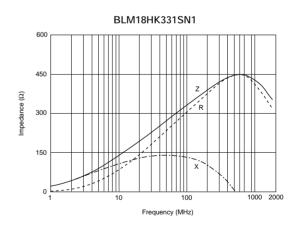

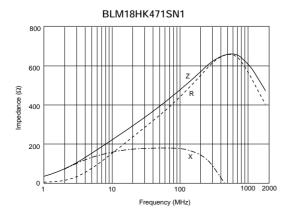


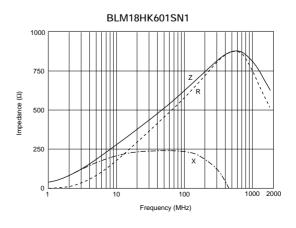

■ Impedance-Frequency Characteristics

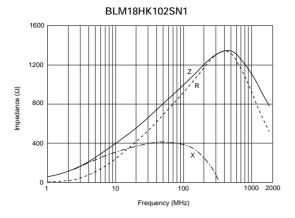

BLM18E Series (0603 Size)

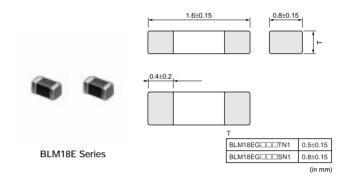



| Part Number | Impedance (at 100MHz/20°C) (ohm) | Impedance (at 1GHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------------------------|-----------------------|----------------------------|--|
| BLM18EG101TN1 | 100 ±25% | 140 (Typ.) | 2000 | 0.045 | -55 to +125 |
| BLM18EG121SN1 | 120 ±25% | 145 (Typ.) | 2000 | 0.04 | -55 to +125 |
| BLM18EG221SN1 | 220 ±25% | 260 (Typ.) | 2000 | 0.05 | -55 to +125 |
| BLM18EG221TN1 | 220 ±25% | 300 (Typ.) | 1000 | 0.15 | -55 to +125 |
| BLM18EG331TN1 | 330 ±25% | 450 (Typ.) | 500 | 0.21 | -55 to +125 |
| BLM18EG391TN1 | 390 ±25% | 520 (Typ.) | 500 | 0.3 | -55 to +125 |
| BLM18EG471SN1 | 470 ±25% | 550 (Typ.) | 500 | 0.21 | -55 to +125 |
| BLM18EG601SN1 | 600 ±25% | 700 (Typ.) | 500 | 0.35 | -55 to +125 |

At rated current 2000mA, derating is required.


Please refer to p.70, "Derating of Rated Current".

■ Impedance-Frequency (Typical)

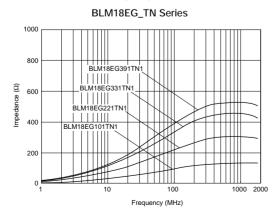


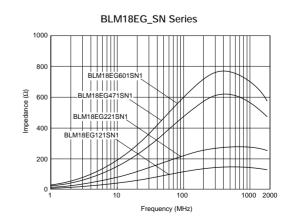



■ Impedance-Frequency Characteristics

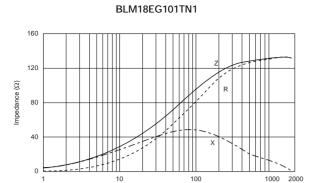



Frequency (MHz)

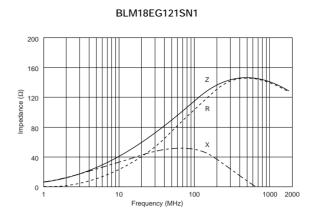


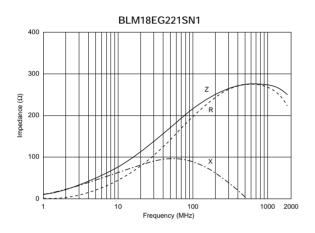


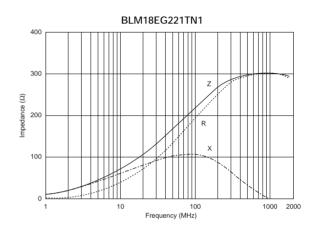

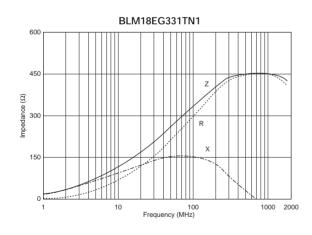

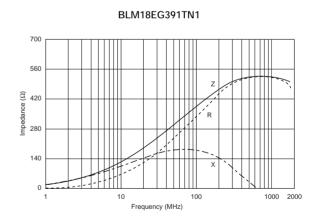

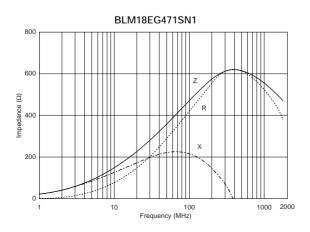


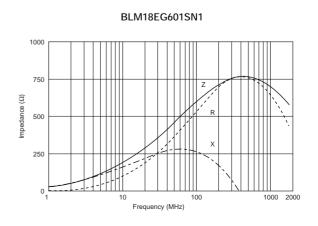

Continued from the preceding page.

■ Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for chip Ferrite Beads for which rated current is 1200mA or over. Please apply the derating curve shown in chart according to the operating temperature.

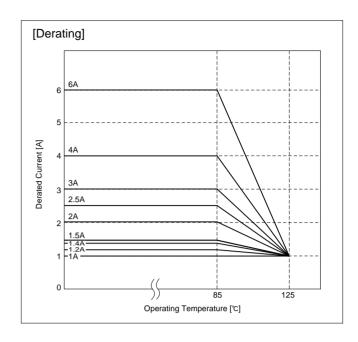

BLM18G Series (0603 Size)


Chip ferrite beads for high frequency noise suppression over a wide frequency range.

■ Features

- 1. High impedance characteristic in 1GHz or higher frequency
- 2. High impedance characteristic over a wide frequency band range of 100MHz to 6GHz
- 3. Small decrease in impedance during current loading, resulting in small impedance fluctuation during equipment operation.
- 4. Reflow soldering only


Applications


- 1. Noise suppression for PCs with high-speed CPU and high-speed bus, and for interface line of peripheral equipment.
- 2. High harmonic noise suppression for digital equipment with several hundred MHz or higher clock
- 3. Prevention of erroneous operation caused by local oscillation signals in mobile phone and W-LAN module (ensuring self-immunity).
- 4. Bias Tee modules in optical transceivers

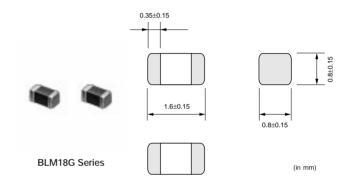

| Part Number | Impedance (at 100MHz/20°C) (ohm) | Impedance (at 1GHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------------------------|-----------------------|-------------------------------|--|
| BLM18GG471SN1 | 470 ±25% | 1800 ±30% | 200 | 1.30 | -55 to +125 |


■ Impedance-Frequency (Typical)

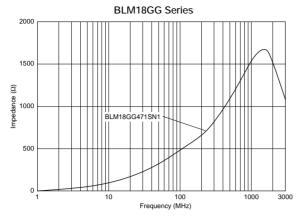


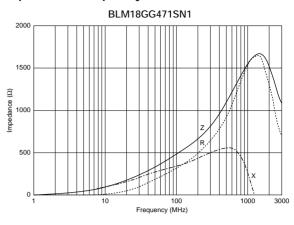


Noise Suppression Effect

■Noise Suppression in UHF Range

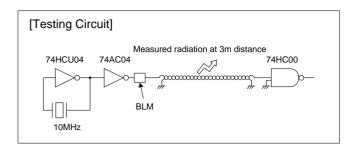

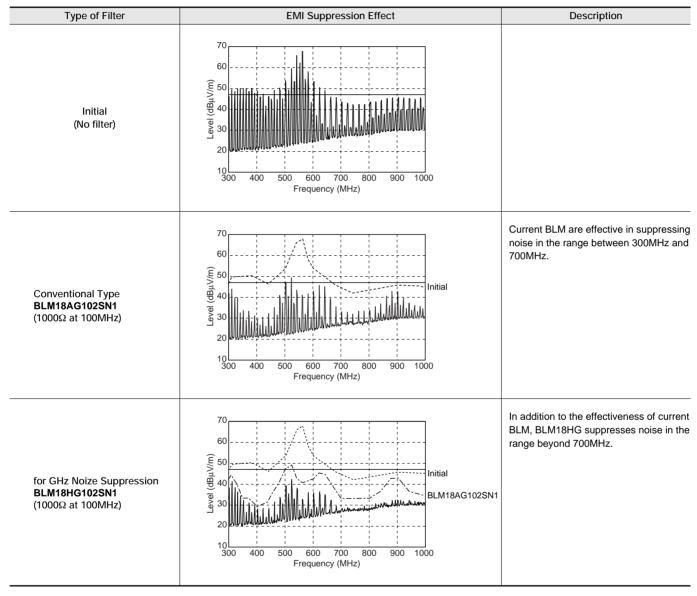

Comparison between BLM18HG102SN1 and BLM18AG102SN1 (Current Item)

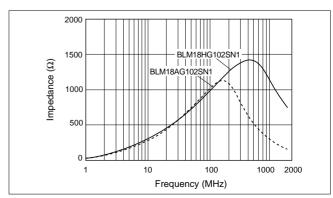

• This PDE catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip Ferrite Beads Arrays BLA2AA/2AB/31A/31B Series

BLA2AA/BLA2AB Series

■ Features

- 1. BLA2AA/2AB series has 4 circuits in 2.0x1.0mm body with 0.5mm pitch.
- Provides attenuation across a broad frequency range.
 Two types of impedance characteristics are available, one is for general signal line and the other is for high speed signal line.
- 3. Original inner electrode structure enables extra low crosstalk.
- 4. The nickel barrier structure of the external electrodes provides excellent solder heat resistance.

(in mm)


■ Applications

Notebook size PCs, PDAs and other compact size digital equipment


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|--------------------|-------------------------------|--|
| BLA2AAG121SN4 | 120 ±25% | 100 | 0.50 | -55 to +125 |
| BLA2AAG221SN4 | 220 ±25% | 50 | 0.70 | -55 to +125 |
| BLA2AAG601SN4 | 600 ±25% | 50 | 1.10 | -55 to +125 |
| BLA2AAG102SN4 | 1000 ±25% | 50 | 1.30 | -55 to +125 |
| BLA2ABB100SN4 | 10 ±25% | 200 | 0.1 | -55 to +125 |
| BLA2ABB220SN4 | 22 ±25% | 200 | 0.2 | -55 to +125 |
| BLA2ABB470SN4 | 47 ±25% | 200 | 0.35 | -55 to +125 |
| BLA2ABB121SN4 | 120 ±25% | 50 | 0.60 | -55 to +125 |
| BLA2ABB221SN4 | 220 ±25% | 50 | 0.90 | -55 to +125 |
| BLA2ABD750SN4 | 75 ±25% | 200 | 0.20 | -55 to +125 |
| BLA2ABD121SN4 | 120 ±25% | 200 | 0.35 | -55 to +125 |
| BLA2ABD221SN4 | 220 ±25% | 100 | 0.40 | -55 to +125 |
| BLA2ABD471SN4 | 470 ±25% | 100 | 0.65 | -55 to +125 |
| BLA2ABD601SN4 | 600 ±25% | 100 | 0.80 | -55 to +125 |
| BLA2ABD102SN4 | 1000 ±25% | 50 | 1.00 | -55 to +125 |


Number of Circuits: 4


■ Equivalent Circuit

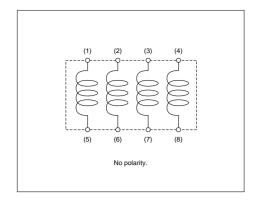


■ Impedance-Frequency (Typical)

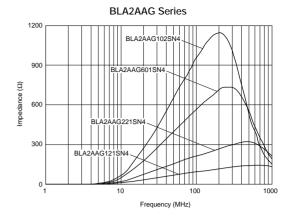


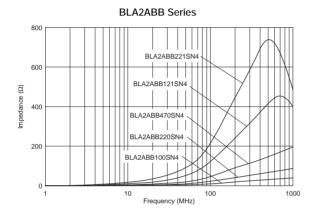


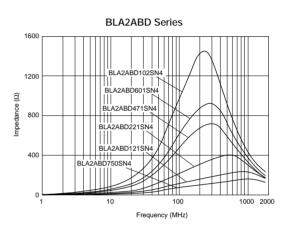


■ Impedance-Frequency Characteristics

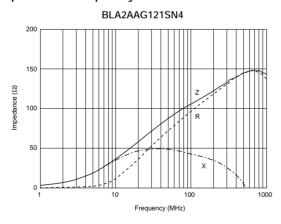

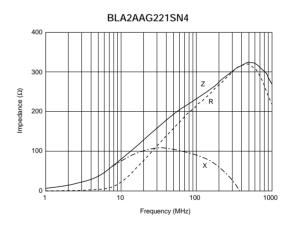

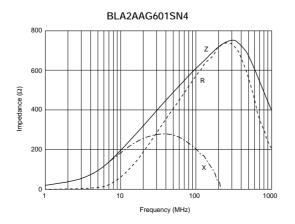

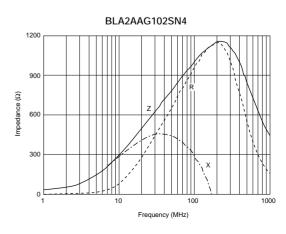




Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

() Continued from the preceding page.


■ Impedance-Frequency Characteristics




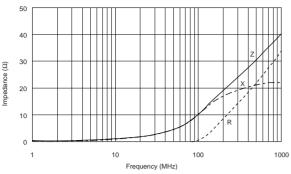

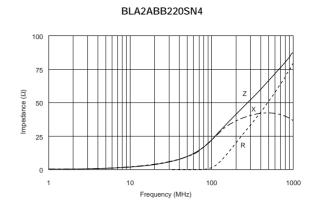



BLA2ABB470SN4

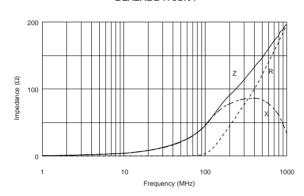

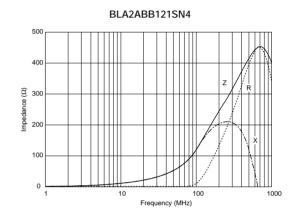



BLA2ABB221SN4

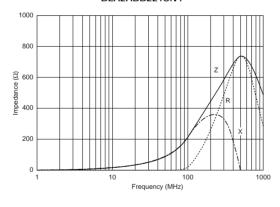

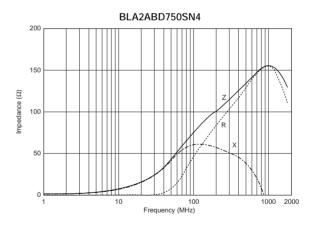


BLA2ABD121SN4 300

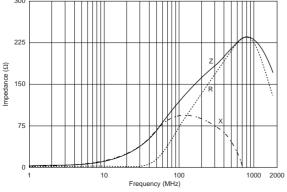

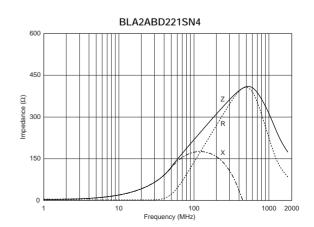


■ Impedance-Frequency Characteristics


BLA2ABD471SN4

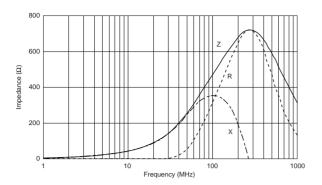

BLA2ABD601SN4

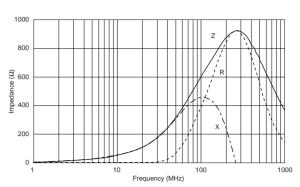

BLA2ABD102SN4

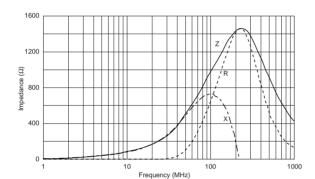

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


BLA31A/BLA31B Series

The miniaturization of electronic equipment requires high performance EMI filters which enable high density mounting. BLA31A/B series consists of 4 circuits of ferrite beads.

BLA31A/B is suitable for EMI suppression in smaller digital equipment.

■ Features

- 1. BLA31A/B has 4 circuits in 3.2x1.6mm body with 0.8mm pitch.
- 2. Provides attenuation across a broad frequency range. Two types of impedance are available which meet general signal line and high speed signal line.
- 3. Original inner electrode structure enables extra low crosstalk.
- 4. The nickel barrier structure of the external electrodes provides excellent solder heat resistance. Both flow and reflow soldering methods can be employed.

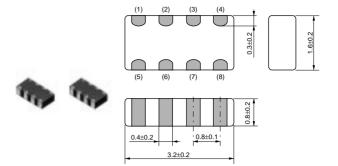


(in mm)


| Part Number | Impedance (at 100MHz/20°C) (ohm) | Rated Current (mA) | DC Resistance (max.) (ohm) | Operating Temperature Range (°C) |
|---------------|--|-----------------------|-------------------------------|--|
| BLA31AG300SN4 | 30 ±25% | 200 | 0.10 | -55 to +125 |
| BLA31AG600SN4 | 60 ±25% | 200 | 0.15 | -55 to +125 |
| BLA31AG121SN4 | 120 ±25% | 150 | 0.20 | -55 to +125 |
| BLA31AG221SN4 | 220 ±25% | 150 | 0.25 | -55 to +125 |
| BLA31AG601SN4 | 600 ±25% | 100 | 0.35 | -55 to +125 |
| BLA31AG102SN4 | 1000 ±25% | 50 | 0.45 | -55 to +125 |
| BLA31BD121SN4 | 120 ±25% | 150 | 0.30 | -55 to +125 |
| BLA31BD221SN4 | 220 ±25% | 150 | 0.35 | -55 to +125 |
| BLA31BD471SN4 | 470 ±25% | 100 | 0.40 | -55 to +125 |
| BLA31BD601SN4 | 600 ±25% | 100 | 0.45 | -55 to +125 |
| BLA31BD102SN4 | 1000 ±25% | 50 | 0.55 | -55 to +125 |


Number of Circuits: 4

■ Equivalent Circuit

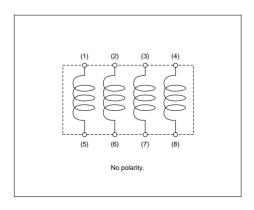



■ Impedance-Frequency (Typical)

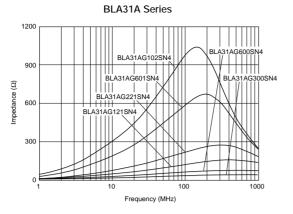


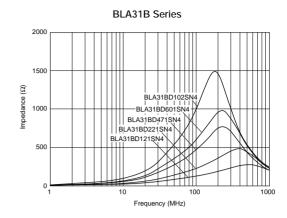



■ Impedance-Frequency Characteristics

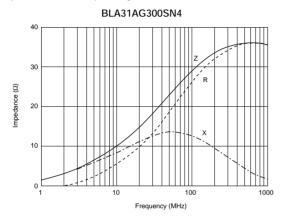


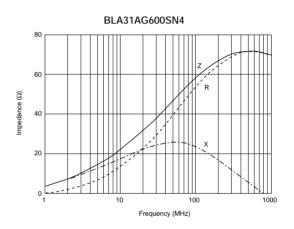

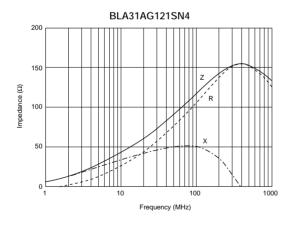

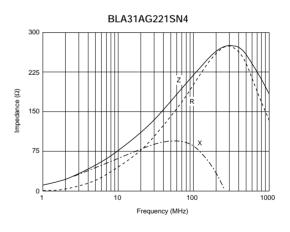


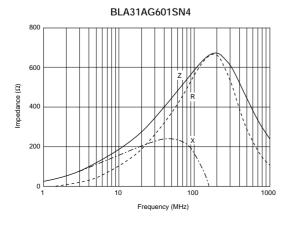


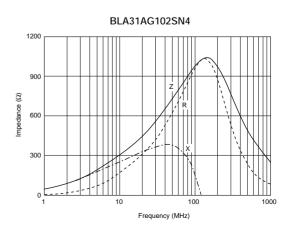






■ Impedance-Frequency Characteristics

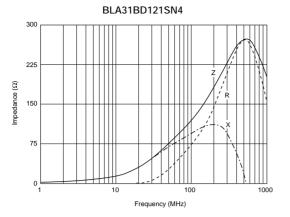

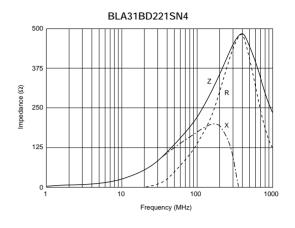

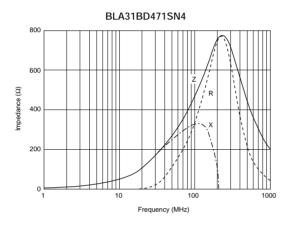

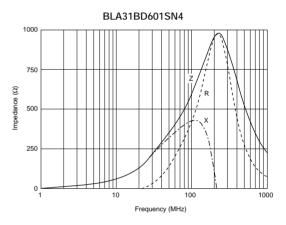

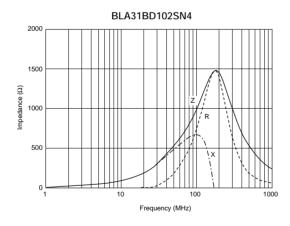

Chip EMIFIL® Part Numbering

Chip EMIFIL® Capacitor Type/Capacitor Array Type

(Part Number)

NF M 3D CC 102 R 1H 3 L

Product ID

| Product ID | |
|------------|--------------|
| NF | Chip EMIFIL® |

2Structure

| Code | Structure |
|------|----------------------|
| М | Capacitor Type |
| Α | Capacitor Array Type |

3Dimensions (LXW)

| Code | Dimensions (LXW) | EIA |
|------|------------------|------|
| 18 | 1.6×0.8mm | 0603 |
| 21 | 2.0×1.25mm | 0805 |
| 3D | 3.2×1.25mm | 1205 |
| 31 | 3.2×1.6mm | 1206 |
| 41 | 4.5×1.6mm | 1806 |
| 55 | 5.7×5.0mm | 2220 |

4 Features

| Code | Features |
|------|----------------------------------|
| СС | Capacitor Type for Signal Lines |
| PC | Capacitor Type for Large Current |
| PS | High Loss Type for Large Current |

6 Capacitance

Expressed by three figures. The unit is in pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

6Characteristics

| Code | Capacitance Change (Temperature Characteristics) |
|------|--|
| В | ±10% |
| F | +30/-80% |
| R | ±15% |
| U | -750 ±120ppm/°C |
| S | +350 to -1000ppm/°C |

Rated Voltage

| Code | Rated Voltage |
|------|---------------|
| 0J | 6.3V |
| 1A | 10V |
| 1C | 16V |
| 1E | 25V |
| 1H | 50V |
| 2A | 100V |

8 Electrode/Others (NFM Series)

| Code | Electrode | Series |
|------|----------------|--------------------|
| 3 | Sn Plating | NFM (Except NFM55) |
| 4 | Solder Coating | NFM55 |

8 Number of Circuits (NFA□□CC Series)

| Code | Number of Circuits |
|------|--------------------|
| 4 | 4 Circuits |
| | |

Packaging

| Code | Packaging | Series |
|------|-------------------------------|---------------------|
| L | Embossed Taping (ø180mm Reel) | NFM3D/NFM41/NFM55 |
| В | Bulk | All series |
| D | Paper Taping (ø180mm Reel) | NFM18/NFM21/NFA□□CC |



Chip EMIFIL® LC Combined Type

(Part Number)

NF L 18 ST 107 X 1C 3 L

Product ID

| Product ID | |
|------------|--------------|
| NF | Chip EMIFIL® |

2Structure

| Code | Structure |
|------|------------------------------|
| L | Monolithic, LC Combined Type |
| w | Winding, LC Combined Type |
| E | Block, LC Combined Type |

3Dimensions (LXW)

| Code | Dimensions (LXW) | EIA |
|------|------------------|------|
| 18 | 1.6×0.8mm | 0603 |
| 21 | 2.0×1.25mm | 0805 |
| 31 | 3.2×1.6mm | 1206 |
| 61 | 6.8×1.6mm | 2606 |

4 Features

| Code | Features |
|------|-----------------------------|
| SP | π Circuit for Signal Lines |
| ST | T Circuit for Signal Lines |
| PT | T Circuit for Large Current |
| HT | T Circuit for Heavy-duty |

5Cut-off Frequency (**NFL/NFW** Series)

Expressed by three figures. The unit is in hertz (Hz). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

6Capacitance (**NFE** Series)

Expressed by three figures. The unit is in pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

Packaging

| Code | Packaging | Series |
|------|-------------------------------|-----------------|
| K | Embossed Taping (ø330mm Reel) | NFW31/NFE |
| L | Embossed Taping (ø180mm Reel) | NFW31/NFE |
| В | Bulk | NFL18/NFL21/NFE |
| D | Paper Taping (ø180mm Reel) | NFL18/NFL21 |

6Characteristics (NFL/NFW Series)

| Code | Characteristics |
|------|-------------------|
| х | Cut-off Frequency |

6Characteristics (NFE Series)

| Code | Capacitance Change (Temperature Characteristics) |
|------|--|
| В | ±10% |
| С | ±20%, ±22% |
| D | +20/-30%, +22/-33% |
| E | +20/-55%, +22/-56% |
| F | +30/-80%, +22/-82% |
| R | ±15% |
| U | -750 ±120ppm/ °C |
| Z | Other |

Rated Voltage

| Code | Rated Voltage |
|------|---------------|
| 1A | 10V |
| 1C | 16V |
| 1E | 25V |
| 1H | 50V |
| 2A | 100V |

8 Electrode

| Code | Electrode | Series |
|------|--------------------------|--------|
| 3/7 | Sn Plating | NFL |
| 4 | Lead Free Solder Coating | NFW |
| 9 | Others | NFE |



Chip EMIFIL® LC Combined Array Type (NFA21S Series)

(Part Number)



●Product ID

| Product ID | |
|------------|--------------|
| NF | Chip EMIFIL® |

2Structure

| Code | Structure |
|------|------------|
| A | Array Type |

3Dimensions (LXW)

| Code | Dimensions (L×W) |
|------|------------------|
| 21 | 2.0×1.25mm |

4 Features

| Code | Features |
|------|----------------------------|
| SL | L Circuit for Signal Lines |

5Cut-off Frequency

Expressed by three figures. The unit is in hertz (Hz). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

6 Features

| Code | Features |
|------|-----------------------|
| X | Expressed by a letter |
| V | |

Rated Voltage

| Code | Rated Voltage |
|------|---------------|
| 1A | 10V |

8 Number of Circuits

| Code | Number of Circuits |
|------|--------------------|
| 4 | 4 Circuits |

9Dimensions (T)

| Code | Dimensions (T) |
|------|----------------|
| 5 | 0.5mm |
| 8 | 0.85mm |

Packaging

| Code | Packaging |
|------|-------------------------------|
| В | Bulk |
| L | Embossed Taping (ø180mm Reel) |

Chip EMIFIL® LC Combined Array Type (NFA2AS Series)

(Part Number)



Product ID

| Product ID | |
|------------|--------------|
| NF | Chip EMIFIL® |

2Structure

| Code | Structure |
|------|------------|
| Α | Array Type |

3Dimensions (LXW)

| Code | Dimensions (LXW) |
|------|------------------|
| 2A | 2.0×1.0mm |

4 Features

| Code | Features |
|------|-------------------------------|
| SN | Notch Filter for Signal Lines |

5First Resonance Characteristics

| Code | Resonance Frequency |
|------|---------------------|
| 907A | 942.5MHz |
| 807A | 880MHz |

6Second Resonance Characteristics

| Code | Resonance Frequency |
|------|---------------------|
| Α | 1842.5MHz |
| В | 2140MHz |

Number of Circuits

| Code | Number of Circuits |
|------|--------------------|
| 4 | 4 Circuits |

8 Packaging

| Code | Packaging | | | | |
|------|-------------------------------|--|--|--|--|
| В | Bulk | | | | |
| L | Embossed Taping (ø180mm Reel) | | | | |

Chip EMIFIL® RC Combined Type/RC Combined Array Type

NF R 21 GD 470 470 2 L (Part Number)

Product ID

| Product ID | |
|------------|--------------|
| NF | Chip EMIFIL® |

2Structure

| Code | Structure |
|------|------------------------|
| R | RC Combined Type |
| Α | RC Combined Array Type |

3Dimensions (LXW)

| Code | ode Dimensions (L×W) | |
|------|----------------------|------|
| 21 | 2.0×1.25mm | 0805 |
| 31 | 3.2×1.6mm | 1206 |

4 Features

| Code | Features |
|------|-----------------------------------|
| GD | RC Combined Type for Signal Lines |

6 Capacitance

Expressed by three figures. The unit is in pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

6Resistance

Expressed by three-digit alphanumerics. The unit is in ohm (Ω) . The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures. If there is a decimal point, it is expressed by the capital letter "R". In this case, all figures are significant digits.

Telectrode/Others (NFR Series)

| Code | Electrode |
|------|------------|
| 2 | Sn Plating |

7 Number of Circuits (**NFA**□□**GD** Series)

| Code | Number of Circuits |
|------|--------------------|
| 4 | 4 Circuits |

8 Packaging

| Code | Packaging | Series |
|------------------------------|-------------------------------|------------|
| L | Embossed Taping (ø180mm Reel) | NFR |
| В | Bulk | All Series |
| D Paper Taping (ø180mm Reel) | | NFA□□GD |

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip EMIFIL® Capacitor Type NFM18C/21C/3DC/41C Series

NFM18C Series


NFM18CC series is a 1.6x0.8mm EMI suppression filter for signal lines which have a three terminal structure using Murata's multilayer technology.

■ Features

- 1. Ultra small size in 1.6x0.8x0.6mm enables high density mounting.
- Three terminal structure with low residual inductance (ESL)* characteristics achieves large insertion loss characteristics even in high frequency area.
- 3. NFM18CC series covers capacitance range from 22 to 22.000pF.
- * Not exceeding one-tenth of monolithic ceramic capacitors (two terminals).


Applications


- EMI suppression of circuit for insertion loss in quantity
- 2. Noise suppression up to GHz

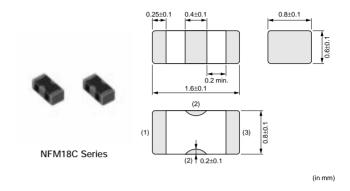

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|-----------------------|--|----------------------------------|
| NFM18CC220U1C3 | 22 +20%,-20% | 16 | 400 | 1000 | -55 to +125 |
| NFM18CC470U1C3 | 47 +20%,-20% | 16 | 400 | 1000 | -55 to +125 |
| NFM18CC101R1C3 | 100 +20%,-20% | 16 | 500 | 1000 | -55 to +125 |
| NFM18CC221R1C3 | 220 +20%,-20% | 16 | 500 | 1000 | -55 to +125 |
| NFM18CC471R1C3 | 470 +20%,-20% | 16 | 500 | 1000 | -55 to +125 |
| NFM18CC102R1C3 | 1000 +20%,-20% | 16 | 600 | 1000 | -55 to +125 |
| NFM18CC222R1C3 | 2200 +20%,-20% | 16 | 700 | 1000 | -55 to +125 |
| NFM18CC223R1C3 | 22000 +20%,-20% | 16 | 1000 | 1000 | -55 to +125 |

■ Equivalent Circuit

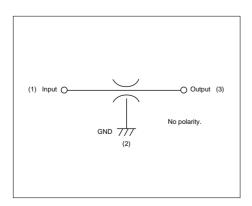

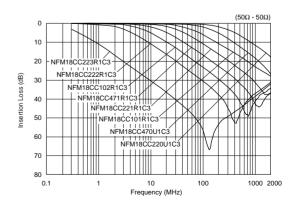

NFM21C Series


The chip "EMIFIL" NFM21C series is a chip type three terminal EMI suppression filter. It can reduce residual inductance to an extremely low level making it excellent for noise suppression at high frequencies.

■ Features

- 1. Small and low profile of 2.0x1.25x0.85mm enables high density mounting.
- 2. Three terminal structure enables high performance in high frequency range.
- 3. Uses original electrode structure which realizes excellent solderability.
- 4. An electrostatic capacitance range of 22 to 22,000pF enables suppression of noise at specific frequencies.


■ Applications


- 1. PCs and peripherals which emit high amount of noise
- 2. Compact size equipment such as PDAs, PC cards and mobile telecommunications equipment
- 3. Severe EMI suppression and high impedance circuits such as digital circuits

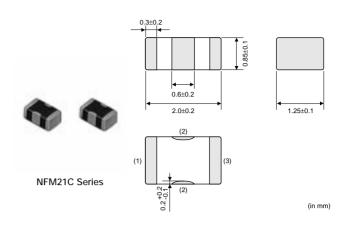

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|--------------------|--|----------------------------------|
| NFM21CC220U1H3 | 22 +20%,-20% | 50 | 700 | 1000 | -55 to +125 |
| NFM21CC470U1H3 | 47 +20%,-20% | 50 | 700 | 1000 | -55 to +125 |
| NFM21CC101U1H3 | 100 +20%,-20% | 50 | 700 | 1000 | -55 to +125 |
| NFM21CC221R1H3 | 220 +20%,-20% | 50 | 700 | 1000 | -55 to +125 |
| NFM21CC471R1H3 | 470 +20%,-20% | 50 | 1000 | 1000 | -55 to +125 |
| NFM21CC102R1H3 | 1000 +20%,-20% | 50 | 1000 | 1000 | -55 to +125 |
| NFM21CC222R1H3 | 2200 +20%,-20% | 50 | 1000 | 1000 | -55 to +125 |
| NFM21CC223R1H3 | 22000 +20%,-20% | 50 | 2000 | 1000 | -55 to +125 |

■ Equivalent Circuit

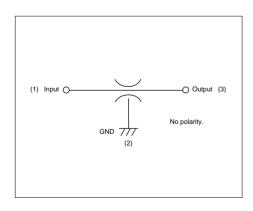

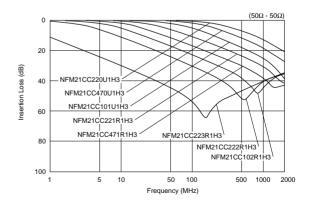

NFM3DC Series


The chip "EMIFIL" NFM3DC series is a chip type three terminal EMI suppression filter. It can reduce residual inductance to an extremely low level making it excellent for noise suppression at high frequencies.

■ Features

An electrostatic capacitance range of 22 to 22,000pF enables suppression of noise at specific frequencies.


■ Applications


High noise radiation and high impedance circuits such as digital circuits

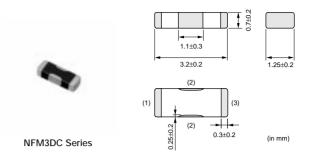

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|--------------------|--|----------------------------------|
| NFM3DCC220U1H3 | 22 +50%,-20% | 50 | 300 | 1000 | -55 to +125 |
| NFM3DCC470U1H3 | 47 +50%,-20% | 50 | 300 | 1000 | -55 to +125 |
| NFM3DCC101U1H3 | 100 +50%,-20% | 50 | 300 | 1000 | -55 to +125 |
| NFM3DCC221R1H3 | 220 +50%,-20% | 50 | 300 | 1000 | -55 to +125 |
| NFM3DCC471R1H3 | 470 +50%,-20% | 50 | 300 | 1000 | -55 to +125 |
| NFM3DCC102R1H3 | 1000 +50%,-20% | 50 | 300 | 1000 | -55 to +125 |
| NFM3DCC222R1H3 | 2200 +50%,-20% | 50 | 300 | 1000 | -55 to +125 |
| NFM3DCC223R1H3 | 22000 +50%,-20% | 50 | 300 | 1000 | -55 to +125 |

■ Equivalent Circuit

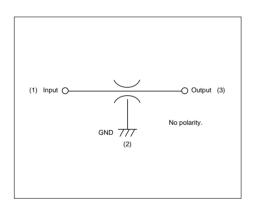

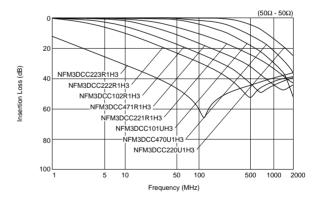

NFM41C Series


The chip "EMIFIL" NFM41C series is a chip type three terminal EMI suppression filter. It can reduce residual inductance to an extremely low level making it excellent for noise suppression at high frequencies.

■ Features

An electrostatic capacitance range of 22 to 22,000pF enables suppression of noise at specific frequencies.


■ Applications


High noise radiation and high impedance circuits such as digital circuits

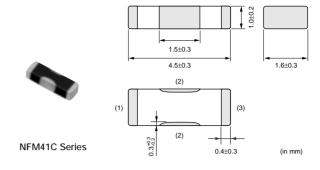

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|-----------------------|--|----------------------------------|
| NFM41CC220U2A3 | 22 +50%,-20% | 100 | 300 | 10000 | -55 to +125 |
| NFM41CC470U2A3 | 47 +50%,-20% | 100 | 300 | 10000 | -55 to +125 |
| NFM41CC101U2A3 | 100 +50%,-20% | 100 | 300 | 10000 | -55 to +125 |
| NFM41CC221U2A3 | 220 +50%,-20% | 100 | 300 | 10000 | -55 to +125 |
| NFM41CC471R2A3 | 470 +50%,-20% | 100 | 300 | 10000 | -55 to +125 |
| NFM41CC102R2A3 | 1000 +50%,-20% | 100 | 300 | 10000 | -55 to +125 |
| NFM41CC222R2A3 | 2200 +50%,-20% | 100 | 300 | 10000 | -55 to +125 |
| NFM41CC223R2A3 | 22000 +50%,-20% | 100 | 300 | 10000 | -55 to +125 |

■ Equivalent Circuit

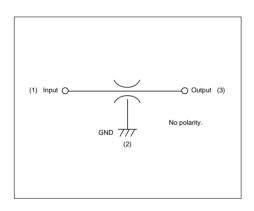

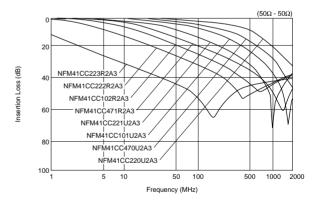


On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip EMIFIL® Capacitor Array Type NFA31C Series

NFA31C series is a chip EMI suppression filter for surface mount applications using Murata's ceramic processing technology and filter design technology. The series is well suited for EMI suppression in digital I/O lines of varied electronic equipment such as notebook size PCs.

THE



(in mm)

■ Features

- High density mounting can be realized because of 4 circuits in one package with 0.8mm pitch.
- 2. Suitable for high frequency noise suppression because of low residual inductance of three terminal structure.
- 3. Excellent EMI suppression can be realized because of two terminal simple GNDs for 4 circuits.
- 4. 20 to 22,000pF lineups can be used depending on noise frequency.


■ Applications


- 1. Personal computers and peripherals
- 2. Telephones, PPCs, communications equipment
- 3. Digital TVs, DVDs

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|-----------------------|--|----------------------------------|
| NFA31CC220S1E4 | 22 +20%,-20% | 25 | 200 | 1000 | -40 to +85 |
| NFA31CC470S1E4 | 47 +20%,-20% | 25 | 200 | 1000 | -40 to +85 |
| NFA31CC101S1E4 | 100 +20%,-20% | 25 | 200 | 1000 | -40 to +85 |
| NFA31CC221S1E4 | 220 +20%,-20% | 25 | 200 | 1000 | -40 to +85 |
| NFA31CC471R1E4 | 470 +20%,-20% | 25 | 200 | 1000 | -40 to +85 |
| NFA31CC102R1E4 | 1000 +20%,-20% | 25 | 200 | 1000 | -40 to +85 |
| NFA31CC222R1E4 | 2200 +20%,-20% | 25 | 200 | 1000 | -40 to +85 |
| NFA31CC223R1C4 | 22000 +20%,-20% | 16 | 200 | 1000 | -40 to +85 |

Number of Circuits: 4

■ Equivalent Circuit

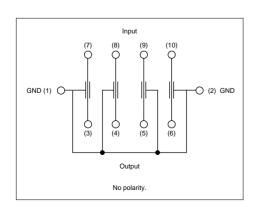

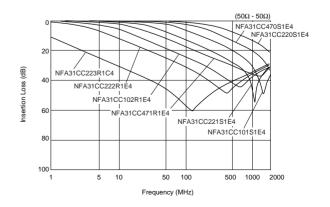

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip EMIFIL® LC Combined Monolithic Type NFL18ST/18SP/21S Series

NFL18ST Series

NFL18ST series is an EMI suppression filter for high speed signal lines, achieving T-type structure in 1.6x0.8mm size with Murata's multilayer technology.

■ Features

- 1. Ultra-small size in 1.6x0.8x0.8mm
- 2. Steep insertion loss characteristics realize excellent noise suppression and prevent distortion of signal waveform.
- 3. By minimizing stray capacitance of inductor, achieves high performance in noise suppression in high frequency range.
- 4. Three different values of cut-off frequency are available, ranging from 200MHz up to 500MHz.
- 5. Since all side electrode structures are the same, it is no polarity.

■ Applications

Noise suppression for video signal lines (RGB lines) and high speed clock lines


| | 0.2 min. 0.2 min. (1) (3) |
|--|---------------------------|
| | 0.25±0.1 |
| | |

(in mm)

| Part Number | Cut-off Frequency (MHz) | Capacitance (pF) | Inductance (nH) | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (M ohm) | Operating Temperature Range (°C) |
|----------------|----------------------------|---------------------|--------------------|---------------------------|--------------------------|-------------------------------------|--|
| NFL18ST207X1C3 | 200 | 25 +20%,-20% | 110 +20%,-20% | 16 | 150 | 1000 | -55 to 125 |
| NFL18ST307X1C3 | 300 | 18 +20%,-20% | 62 +20%,-20% | 16 | 200 | 1000 | -55 to 125 |
| NFL18ST507X1C3 | 500 | 10 +20%,-20% | 43 +20%,-20% | 16 | 200 | 1000 | -55 to 125 |

Number of Circuits: 1

■ Equivalent Circuit

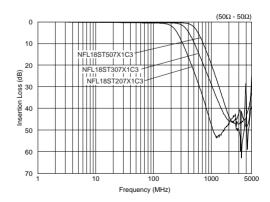

NFL18SP Series


The chip "EMIFIL" NFL18SP series is an EMI Suppression filter for high speed signal lines, achieving pi-type structure in 0603 size with Murata's multilayer technology.

■ Features

- 1. Ultra-small size in 1.6x0.8x0.6 mm
- 2. Achieves high performance in noise suppression over wide frequency range
- 3. Steep insertion loss characteristics realize excellent noise suppression and prevent distortion of signal waveform.
- 4. Line up 4 items of cut-off frequency range from 150 to 500MHz




EMI suppression for digital signal line such as RGB and high speed clock lines

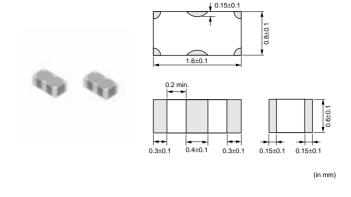


| Part Number | Cut-off Frequency (MHz) | Capacitance (pF) | Inductance (nH) | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (M ohm) | Operating Temperature Range (°C) |
|----------------|----------------------------|---------------------|--------------------|---------------------------|--------------------------|-------------------------------------|--|
| NFL18SP157X1A3 | 150 | 34 +20%,-20% | 100 +20%,-20% | 10 | 100 | 1000 | -55 to 125 |
| NFL18SP207X1A3 | 200 | 24 +20%,-20% | 80 +20%,-20% | 10 | 100 | 1000 | -55 to 125 |
| NFL18SP307X1A3 | 300 | 19 +20%,-20% | 60 +20%,-20% | 10 | 100 | 1000 | -55 to 125 |
| NFL18SP507X1A3 | 500 | 11 +20%,-20% | 38 +20%,-20% | 10 | 100 | 1000 | -55 to 125 |

Number of Circuits: 1

■ Equivalent Circuit

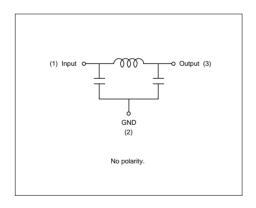

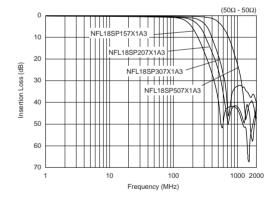


1.25±0.1

NFL21S Series

The chip "EMIFIL" NFL21S series is a high performance EMI suppression filter in 2.0x1.25mm size for high speed signal lines by using Murata's processing technology.

■ Features

- 1. Suppresses noise with little attenuation of the signal itself due to its steep filtering characteristics.
- 2. Murata's original internal structure design enables excellent noise suppression up to high frequencies.
- 3. Available in ten different values of cut-off frequency ranging from 10MHz up to 500MHz.

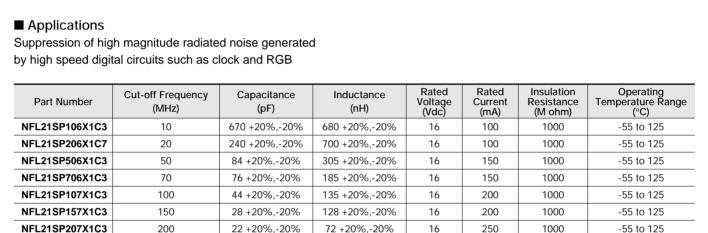

45 +10%,-10%

34 +10%,-10%

31 +10%,-10%

16

16


16

NFL21SP507X1C3 Number of Circuits: 1

NFL21SP307X1C3

NFL21SP407X1C3

■ Equivalent Circuit

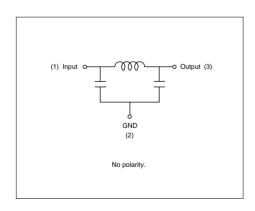

300

400

500

19 +10%,-10%

16 +10%,-10%

12 +10%,-10%

■ Insertion Loss Characteristics (Typical)

300

300

300

0.3+0.2

(1)

0.4+0.2

0.6+0.2 2.0±0.2

(2)

(2)

1000

1000


1000

-55 to 125

-55 to 125

-55 to 125

(3)

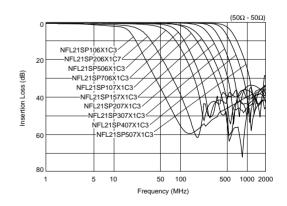



Note

• This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip EMIFIL® LC Combined Array Type NFA2AS/21S Series


NFA2AS Series

■ Feautures

- 1. Steep insertion loss characteristics
- 2. Suitable for noise suppression in 800MHz or higher frequency
- 3. Size: 2.0x1.0mm
- 4. 4 circuits in one package
- 5. LC combined type of non-ground electrode

Applications

Noise suppression for LCD line, camera's module line

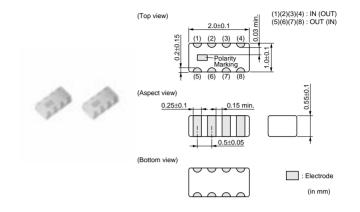



| Part Number | Insertion Loss at 400MHz (max.) (dB) | Insertion Loss at 880MHz (min.) (dB) | Insertion Loss at 942.5MHz (min.) (dB) | Insertion Loss at 1842.5MHz (min.) (dB) | Insertion Loss at 2140MHz (min.) (dB) | Rated Current (mA) |
|---------------|--|--|--|---|---|--------------------------|
| NFA2ASN807AB4 | 6 | 22 | - | - | 18 | 75 |
| NFA2ASN907AA4 | 6 | - | 22 | 18 | - | 75 |

Operating Temperature Range: -40°C to 85°C Number of Circuits: 4

■ Equivalent Circuit

(1)(2)(3)(4): IN (OUT) (5)(6)(7)(8): OUT (IN)



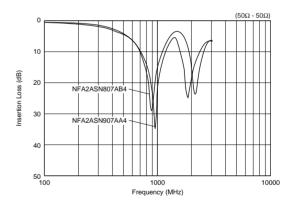

⚠Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


NFA21S Series

■ Features

- 1. Steep insertion loss characteristics
- 2. Suitable for noise suppression in 800MHz or higher frequency
- 3. Size: 2.0x1.25mm
- 4. 4 circuits in one package

■ Applications

Noise suppression for LCD line

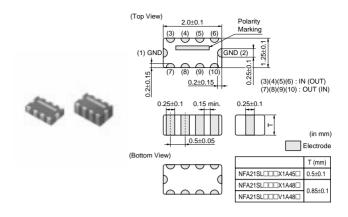



| Part Number | Cut-off Frequency (MHz) | Insertion Loss at Cut-off Frequency (dB) | Insertion Loss at 500MHz (min.) (dB) | Insertion Loss at 800MHz (min.) (dB) | Insertion Loss at 900MHz (min) (dB) | Insertion Loss at 1000MHz (min.) (dB) | Insulation Resistance (min.) (M ohm) | Rated Voltage (Vdc) | Rated Current (mA) | Withstand Voltage (Vdc) |
|-----------------|-------------------------------|--|--|--|---|---|--|---------------------------|--------------------------|-------------------------------|
| NFA21SL806X1A48 | 80 | 2 to 7 | 25 | - | - | 25 | 1000 | 10 | 20 | 30 |
| NFA21SL207X1A45 | 200 | 2 to 7 | 13 | 25 | - | 25 | 1000 | 10 | 100 | 30 |
| NFA21SL207X1A48 | 200 | 2 to 7 | 13 | 25 | - | 25 | 1000 | 10 | 100 | 30 |
| NFA21SL307X1A45 | 300 | 2 to 7 | 7 | 20 | - | 25 | 1000 | 10 | 100 | 30 |
| NFA21SL307X1A48 | 300 | 2 to 7 | 7 | 20 | - | 25 | 1000 | 10 | 100 | 30 |
| NFA21SL287V1A48 | 280 | 6 max | - | 25 | 25 | - | 1000 | 10 | 100 | 30 |
| NFA21SL317V1A48 | 310 | 6 max | - | 20 | 20 | - | 1000 | 10 | 100 | 30 |
| NFA21SL337V1A48 | 330 | 6 max | - | 20 | 20 | - | 1000 | 10 | 100 | 30 |


Operating Temperature Range: -55°C to 125°C

Number of Circuits: 4

■ Equivalent Circuit

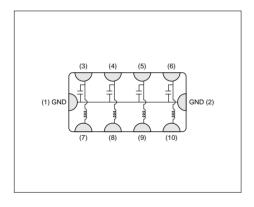

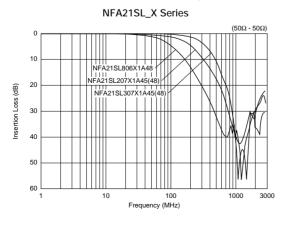

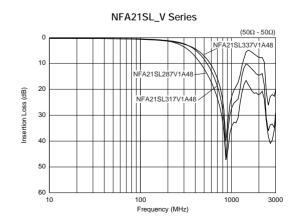

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip EMIFIL® LC Combined Wire Wound Type NFW31S Series

The signal line chip EMI filter NFW31S series consists of high performance EMI suppression filters. They are designed for noise suppression in high speed signal digital circuits in which the signal harmonics are prone to becoming noise sources. These filters achieve a 100dB/dec. (typ.) damping characteristic with Murata's innovative circuit design. This makes these chips effective in applications where the signal and noise frequencies are close to each other.

2.3±0.2 1.6±0.2 3.2+0.3 *No polarity (in mm)

■ Features

- 1. Suppresses signal noise with little or no attenuation of the signal itself.
- 2. Murata's original internal structure design enables excellent noise suppression up to high frequencies (40dB at 1GHz typ.).
- 3. NFW31S series is available in 9 different values of cut-off frequency ranging from 10MHz up to 500MHz.


| Part Number | Nominal Cut-off Freq. (MHz) | Attenuation at 10MHz (dB) | Attenuation at 20MHz (dB) | Attenuation at 50MHz (dB) | Attenuation at 100MHz (dB) | Attenuation at 150MHz (dB) | Attenuation at 200MHz (dB) | Attenuation at 300MHz (dB) | Attenuation at 400MHz (dB) | Attenuation at 500MHz (dB) | Attenuation at 1000MHz (dB) |
|----------------|-----------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|-----------------------------------|
| NFW31SP106X1E4 | 10 | 6 max. | 5 min. | 25 min. | 25 min. | - | 25 min. | - | - | 30 min. | 30 min. |
| NFW31SP206X1E4 | 20 | - | 6 max. | 5 min. | 25 min. | - | 25 min. | - | - | 30 min. | 30 min. |
| NFW31SP506X1E4 | 50 | - | - | 6 max. | 10 min. | - | 30 min. | - | - | 30 min. | 30 min. |
| NFW31SP107X1E4 | 100 | - | - | - | 6 max. | - | 5 min. | - | - | 20 min. | 30 min. |
| NFW31SP157X1E4 | 150 | - | - | - | - | 6 max. | - | 10 min. | 20 min | 30 min. | 30 min. |
| NFW31SP207X1E4 | 200 | - | - | - | - | - | 6 max. | - | - | 10 min. | 30 min. |
| NFW31SP307X1E4 | 300 | - | - | - | - | - | - | 6 max. | - | 5 min. | 15 min. |
| NFW31SP407X1E4 | 400 | - | - | - | - | - | - | - | 6 max. | - | 10 min. |
| NFW31SP507X1E4 | 500 | - | - | - | - | - | - | - | - | 6 max. | 10 min. |


Rated Current: 200mA

Rated Voltage: 25Vdc

Operating Temperature Range: -40°C to 85°C


■ Equivalent Circuit

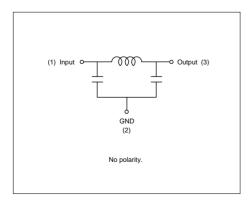

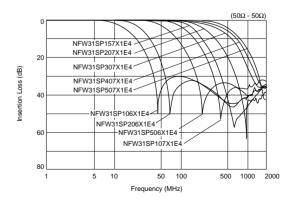

Noise Suppression Effect of NFW31S Series

■Example of EMI Suppression in an Actual Circuit

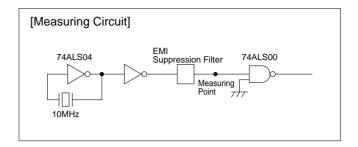

| Type of Filter | Signal Wave Form (20ns/div) | EMI Suppression Effect | Description |
|---|------------------------------------|--|--|
| Signal Waveform and Noise Spectrum before Filter Mounting | Signal Waveform (20ns/div) 1V/div/ | Noise Spectrum (10:1 Active Probe) | |
| NFW31S Series (Cut-off frequency 50MHz) | ΛM | 100 Level before Filter mounting 100 100 200 300 400 500 Frequency (MHz) | NFW31S's steep attenuation characteristic means excellent EMI suppression without waveform cornering. |
| Conventional Chip Solid Type EMI Filter (NFM41CC 470pF) | | Level before Selection of the selection | 3-terminal capacitors suppress signal frequencies as EMI frequencies so the signal waveform is distorted. |
| Filter Combined with Conventional LCs L: Chip Inductor C: Chip Capacitor (270pF) | | Level before September 100 Level before Filter mounting 100 100 100 100 100 100 100 1 | Combinations of inductors and capacitors can yield a steep attenuation characteristic, but they require a great deal more mounting space. Moreover, at high frequencies the EMI suppression is less than that obtained by NFW31S. |

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip EMIFIL® RC Combined Type NFR21G Series


NFR21G series comprises high performance EMI suppression filters which can suppress distortion of waveform. Various items are to be used, considering circuit impedance and noise condition.

■ Features

- 1. Murata's original inner design realizes small and low profile of 2.0x1.25x0.5mm.
- Distributed constant circuit realizes smooth change of impedance which prevents reflection of signal and distortion of wave shape.
- NFR21G series is effective in a line where ground is not stable, because the resistance element in the filter absorbs noise and returns it to ground line.
- 4. NFR21G series has no polarity so it can be used in dual direction transport lines.
- 5. NFR21G series has various lineups of resistance (22 to 100 ohm) and capacitance (10 to 100pF).

■ Applications

Interface lines and clock lines where signals tend to be distorted

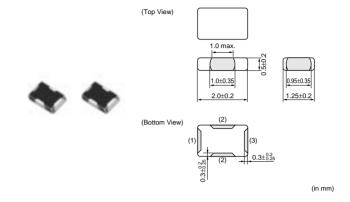



| Part Number | Capacitance (pF) | Resistance (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|---------------------|-----------------------|------------------------|----------------------------------|--|
| NFR21GD1002202 | 10 +20%,-20% | 22 +30%,-30% | 50 | 50 | 1000 | -40 to 85 |
| NFR21GD1004702 | 10 +20%,-20% | 47 +30%,-30% | 35 | 50 | 1000 | -40 to 85 |
| NFR21GD4702202 | 47 +20%,-20% | 22 +30%,-30% | 50 | 50 | 1000 | -40 to 85 |
| NFR21GD4704702 | 47 +20%,-20% | 47 +30%,-30% | 35 | 50 | 1000 | -40 to 85 |
| NFR21GD4706802 | 47 +20%,-20% | 68 +30%,-30% | 30 | 50 | 1000 | -40 to 85 |
| NFR21GD4701012 | 47 +20%,-20% | 100 +30%,-30% | 25 | 50 | 1000 | -40 to 85 |
| NFR21GD1012202 | 100 +20%,-20% | 22 +30%,-30% | 50 | 50 | 1000 | -40 to 85 |
| NFR21GD1014702 | 100 +20%,-20% | 47 +30%,-30% | 35 | 50 | 1000 | -40 to 85 |
| NFR21GD1016802 | 100 +20%,-20% | 68 +30%,-30% | 30 | 50 | 1000 | -40 to 85 |
| NFR21GD1011012 | 100 +20%,-20% | 100 +30%,-30% | 25 | 50 | 1000 | -40 to 85 |


Number of Circuits: 1

Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

■ Equivalent Circuit

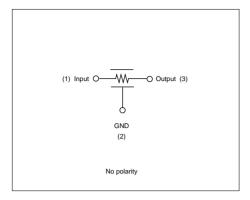

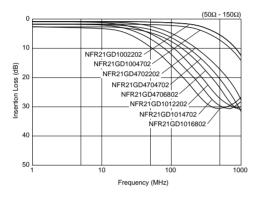

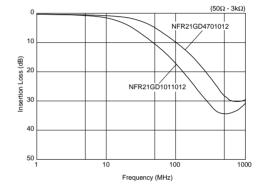


sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


Noise Suppression Effect of NFR21G Series

■Effect of Noise Suppression by NFR21G


NFR21G is effective even if ground line is not stable enough due to its distributed constant circuit structure.

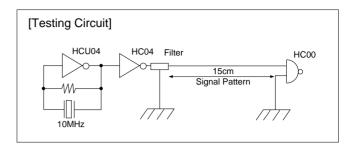

With Stable Ground Line

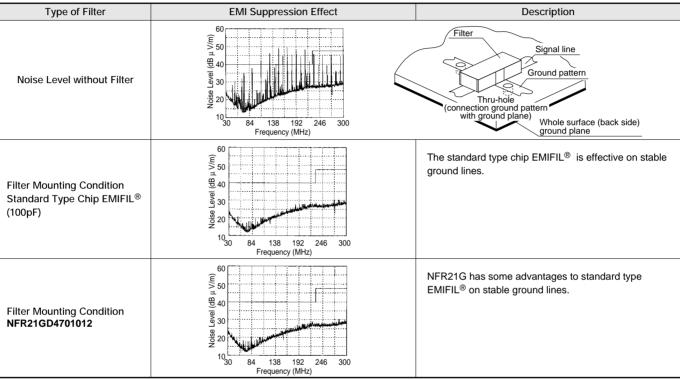


With Poor Ground Line

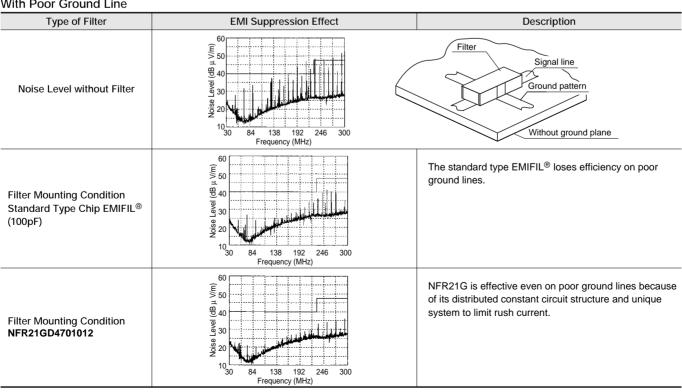

Noise Suppression Effect of NFR21G Series

■Waveform Distortion Suppressing Function by NFR21G

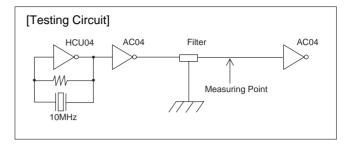

| Type of Filter | EMI Suppression Effect | Description |
|---|---------------------------------------|--|
| Initial Waveform (no filter) | Voltage Waveform ↑:1V/div →:20ns/div | Resonance between the internal capacitance of the IC and the inductance of the print pattern causes waveform overshooting and undershooting. |
| When Ordinary Capacitor Filter is Used | Voltage Waveform ↑:1V/div →:20ns/div | Ordinary capacitor filters have no waveform distortion suppressing capability, and they cannot suppress disturbances in the waveforms. |
| NFR21G | Voltage Waveform ↑:1V/div →:20ns/div | The waveform distortion suppressing function of NFR21G minimizes disturbances of waveforms. |

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)




Chip EMIFIL® RC Combined Array Type NFA31G Series

NFA31G series is a high performance EMI suppression filter array with a 4-circuit noise filter in 3.2x1.6mm size. NFA31G realizes high density mounting.

■ Features


- 1. NFA31G is a 4-circuit noise filter in 3.2x1.6mm size with 0.8mm pitch. High density mounting is available.
- 2. Three terminal structure enables excellent high frequency performance.
- 3. Distributed constant circuit realizes smooth change of impedance which prevents reflection of signal and distortion of wave shape.
- 4. NFA31G series is effective in lines where ground is not stable, because the resistance element in the filter absorbs noise and returns it to ground line.

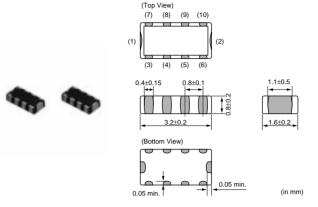


| Part Number | Capacitance (pF) | Resistance (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|---------------------|-----------------------|------------------------|----------------------------------|--|
| NFA31GD1006R84 | 10 +20%,-20% | 6.8 +40%,-40% | 50 | 6 | 1000 | -40 to 85 |
| NFA31GD1004704 | 10 +20%,-20% | 47 +30%,-30% | 20 | 6 | 1000 | -40 to 85 |
| NFA31GD1001014 | 10 +20%,-20% | 100 +30%,-30% | 15 | 6 | 1000 | -40 to 85 |
| NFA31GD4706R84 | 47 +20%,-20% | 6.8 +40%,-40% | 50 | 6 | 1000 | -40 to 85 |
| NFA31GD4704704 | 47 +20%,-20% | 47 +30%,-30% | 20 | 6 | 1000 | -40 to 85 |
| NFA31GD4701014 | 47 +20%,-20% | 100 +30%,-30% | 15 | 6 | 1000 | -40 to 85 |
| NFA31GD1016R84 | 100 +20%,-20% | 6.8 +40%,-40% | 50 | 6 | 1000 | -40 to 85 |
| NFA31GD1014704 | 100 +20%,-20% | 47 +30%,-30% | 20 | 6 | 1000 | -40 to 85 |
| NFA31GD1011014 | 100 +20%,-20% | 100 +30%,-30% | 15 | 6 | 1000 | -40 to 85 |


Number of Circuits: 4


■ Equivalent Circuit

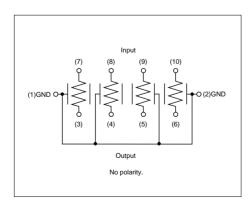



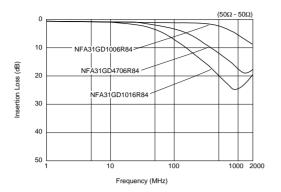

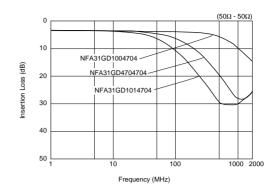

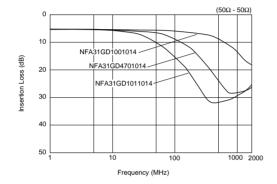

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip EMIFIL® for Large Current NFM18P/21P/3DP/41P/55P Series


NFM18PS Series

■ Features

- Excellent noise suppression characteristics in high frequency band.
- 2. Rated current of 2A is achieved in small size of 1.6x0.8mm.
- 3. Suitable for noise suppression in IC power line.


■ Applications


For IC power lines of digital equipment such as DVDs, DSCs, Mobile Phones, Digital TVs

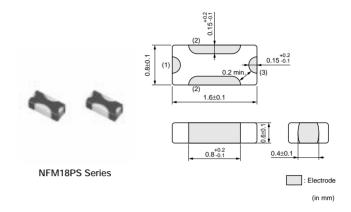

| Part Number | Capacitance (μF) | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|----------------------|--|----------------------------------|
| NFM18PS474R0J3 | 0.47 +20%,-20% | 6.3 | 2 | 1000 | -55 to +125 |
| NFM18PS105R0J3 | 1.0 +20%,-20% | 6.3 | 2 | 500 | -55 to +105 |

■ Equivalent Circuit

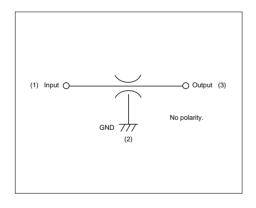

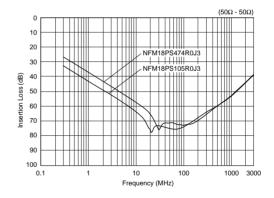

• This PDE catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications or transact the approval sheet for product specifications.

NFM18PC Series


NFM18PC series is a high performance EMI suppression filter in 1.6x0.8mm size for high-speed IC power supply lines by using Murata processing technology.


■ Features

- 1. Ultra-small size in 1.6x0.8mm
- Three terminal structure with low residual (ESL)* and large capacitance 2.2 micro F (max.) realize large insertion loss characteristics over wide frequency range.
- 3. Large rated current 2A is suitable for noise suppression of circuits which require large current.
- 4. NFM18P series has line up of capacitance 0.1 to 2.2 micro F.
- * Not exceeding one-tenth of monolithic ceramic capacitors (two terminal).

■ Applications

- 1. Noise suppression for large capacitance circuits such as high speed IC power lines
- 2. Control change of voltage for high speed IC

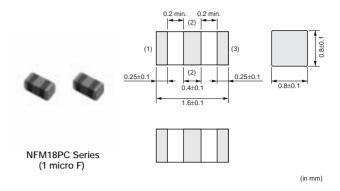


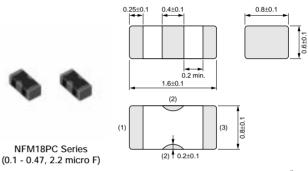

(in mm)

| Part Number | Capacitance (μF) | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|----------------------|--|----------------------------------|
| NFM18PC104R1C3 | 0.1 +20%,-20% | 16 | 2 | 1000 | -55 to +125 |
| NFM18PC224R0J3 | 0.22 +20%,-20% | 6.3 | 2 | 1000 | -55 to +125 |
| NFM18PC474R0J3 | 0.47 +20%,-20% | 6.3 | 2 | 1000 | -55 to +125 |
| NFM18PC105R0J3 | 1.0 +20%,-20% | 6.3 | 2 | 500 | -55 to +105 |
| NFM18PC225B0J3 | 2.2 +20%,-20% | 6.3 | 2 | 200 | -55 to +85 |

■ Equivalent Circuit

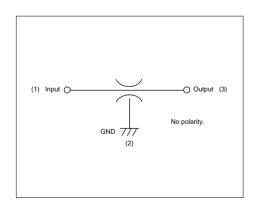

■ Insertion Loss Characteristics

0 (50Ω - 50Ω) NFM18PC104R1C3 NFM18PC224R0J3 NFM18PC224R0J3 NFM18PC225B0J3 NFM18PC225B0J3 NFM18PC225B0J3 NFM18PC29B0J3 NFM18PC29B0J3 NFM18PC29B0J3 NFM18PC29B0J3 NFM18PC29B0J3 NFM18PC29B0J3 NFM18PC29B0J3


NFM18P Series

NFM21P Series

NFM21P is a three terminal structure component. This product can be applied to large current DC power lines. NFM21P is suitable for noise suppression of DC power lines where relatively large current operates.


■ Features

- 1. The rated current of 4A is suitable for IC's individual power lines.
- 2. Small dimension enables higher density packaging. NFM21P is much smaller size (2.0x1.25x0.85mm).
- 3. Murata's original internal electrode structure design realizes excellent EMI suppression effects from low frequency to high frequency.

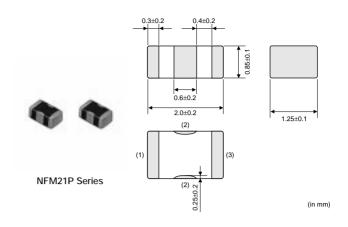

| Part Number | Capacitance (μF) | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|----------------------|--|----------------------------------|
| NFM21PC104R1E3 | 0.1 +20%,-20% | 25 | 2 | 1000 | -55 to +125 |
| NFM21PC224R1C3 | 0.22 +20%,-20% | 16 | 2 | 1000 | -55 to +125 |
| NFM21PC474R1C3 | 0.47 +20%,-20% | 16 | 2 | 1000 | -55 to +125 |
| NFM21PC105B1A3 | 1.0 +20%,-20% | 10 | 4 | 500 | -40 to +85 |
| NFM21PC105B1C3 | 1.0 +20%,-20% | 16 | 4 | 500 | -40 to +85 |
| NFM21PC225B0J3 | 2.2 +20%,-20% | 6.3 | 4 | 200 | -40 to +85 |

■ Equivalent Circuit

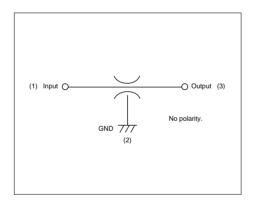

■ Insertion Loss Characteristics

NFM21P Series $(50\Omega - 50\Omega)$ NFM21PC104R1E3 20 NFM21PC224R1C3 NFM21PC474R1C3 nsertion Loss (dB) NFM21PC225B0J3 40 60 80 100 1000 2000 Frequency (MHz)

NFM3DP Series

The chip "EMIFIL" NFM3DP is a chip type three terminal capacitor with high rated current of 2A. This series is suited for noise suppression in DC power supply lines of digital instruments.

■ Features

- 1. Large rated current (2A) is suitable for application in DC power lines.
- 2. Small size (3.2x1.25mm) and low profile (0.7mm max.)


).7±0.2 1.1±0.3 3.2±0.2 0.25±0.2 NFM3DP Series

■ Applications

- 1. Personal computers, word processors and peripherals
- 2. Telephones, PPCs, communication equipment, etc.
- 3. Digital TVs, DVDs
- 4. Telecommunications equipment


| Part Number | Capacitance (μF) | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|----------------------|--|----------------------------------|
| NFM3DPC223R1H3 | 0.022 +20%,-20% | 50 | 2 | 1000 | -55 to +85 |


■ Equivalent Circuit

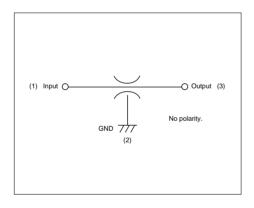

■ Notice (Rating)

When NFM3DP series is used in operating temperatures exceeding +85°C, derating of current is necessary. Please apply the derating curve shown in chart according to the operating temperature.

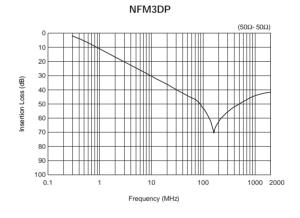

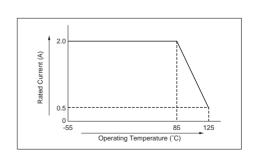

NFM41P Series


The chip "EMIFIL" NFM41P series consists of three terminal structure. These components are able to be applied to large current DC power lines. NFM41P series are suitable in noise suppression in DC lines where relatively large currents operate.

■ Features

- 1. Large rated current 6A (max.) is suitable for the application in DC power lines.
- 2. High electrostatic capacitance and remarkable high frequency performance are effective for immunity against surge noise and pulse noise.

■ Applications


- 1. Personal computers, word processors and peripherals
- 2. Telephones, PPCs, communication equipment, etc.
- 3. Digital TVs, DVDs
- 4. Telecommunications equipment

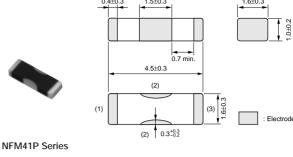


(in mm)

| Part Number | Capacitance (μF) | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|----------------------|--|----------------------------------|
| NFM41PC204F1H3 | 0.2 +80%,-20% | 50 | 2 | 1000 | -55 to +85 |
| NFM41PC155B1E3 | 1.5 +20%,-20% | 25 | 6 | 300 | -55 to +85 |

■ Equivalent Circuit

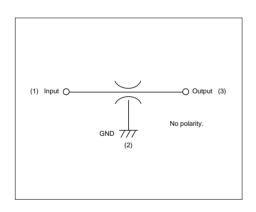

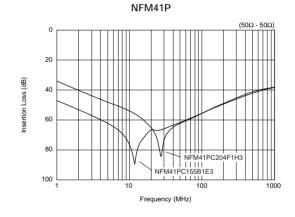

NFM55P Series

The chip solid "EMIFIL" NFM55P is a chip type three terminal capacitor with high rated current of 6A. This series is suited for noise suppression in DC power lines where high rated current and large capacitance is required.

■ Features

- 1. Large rated current (6A) and low voltage drop due to a small DC resistance (0.01 ohm) are suitable for the application in DC power line.
- High electrostatic capacitance and remarkable high frequency performance are effective for the immunity against the surge noise and the pulse noise.
- 3. Only reflow soldering should be applied.


■ Applications


- 1. Personal computers, Word processors and Peripherals
- 2. Telephones, PPCs, communication equipment, etc.
- 3. Digital TVs, DVDs
- 4. Telecommunications equipment

| | 1.7 ±0.3 1.7 ±0.3 5.7±0.3 | 4.7 ^{+0.5} 5.0±0.3 |
|---------------|---------------------------------|-----------------------------|
| | (1) | |
| NFM55P Series | (2) | (in mm) |

| Part Number | Capacitance (μF) | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|----------------------|--|----------------------------------|
| NFM55PC155F1H4 | 1.5 +80%,-20% | 50 | 6 | 100 | -55 to +85 |

■ Equivalent Circuit

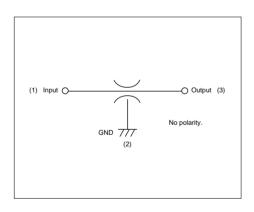

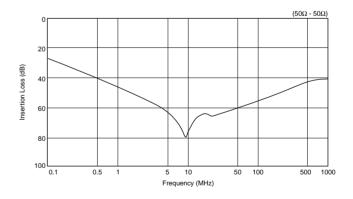




Chip EMIFIL® LC Combined Type for Large Current NFE31P/61P Series

NFE31P Series

The chip "EMIFIL" NFE31P is a small size T-type circuit EMI suppression filter.

■ Features


- Its large rated current of 6A and low voltage drop due to small DC resistance are suitable for DC power line use.
- 2. The feedthrough capacitor realizes excellent high frequency characteristics.
- 3. The structure incorporates built-in ferrite beads which minimize resonance with surrounding circuits.
- 4. 22 to 2,200pF lineups can be used in signal lines.

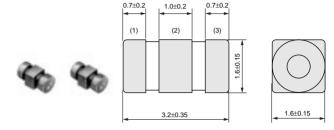


(in mm)

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|----------------------|--|----------------------------------|
| NFE31PT220R1E9 | 22 +30%,-30% | 25 | 6 | 1000 | -40 to +85 |
| NFE31PT470C1E9 | 47 +50%,-20% | 25 | 6 | 1000 | -40 to +85 |
| NFE31PT101C1E9 | 100 +80%,-20% | 25 | 6 | 1000 | -40 to +85 |
| NFE31PT221D1E9 | 220 +50%,-20% | 25 | 6 | 1000 | -40 to +85 |
| NFE31PT471F1E9 | 470 +50%,-20% | 25 | 6 | 1000 | -40 to +85 |
| NFE31PT152Z1E9 | 1500 +50%,-20% | 25 | 6 | 1000 | -40 to +85 |
| NFE31PT222Z1E9 | 2200 +50%,-50% | 25 | 6 | 1000 | -40 to +85 |

■ Equivalent Circuit

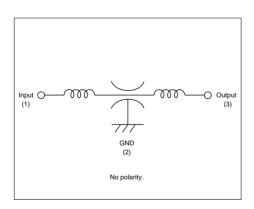

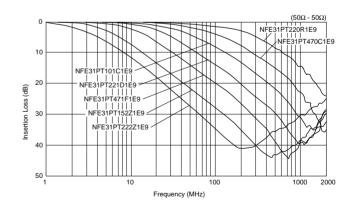


NFE61P Series

The chip "EMIFIL" NFE61P is a T-type circuit EMI suppression filter.

■ Features


- Its large rated current of 2A and low voltage drop due to small DC resistance are suitable for DC power line use.
- 2. The feedthrough capacitor realizes excellent high frequency characteristics.
- 3. The structure incorporates built-in ferrite beads which minimize resonance with surrounding circuits.
- 4. 33 to 4,700pF lineups can be used in signal lines.




(in mm)

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|----------------------|--|----------------------------------|
| NFE61PT330B1H9 | 33 +30%,-30% | 50 | 2 | 1000 | -25 to +85 |
| NFE61PT680B1H9 | 68 +30%,-30% | 50 | 2 | 1000 | -25 to +85 |
| NFE61PT101Z1H9 | 100 +30%,-30% | 50 | 2 | 1000 | -25 to +85 |
| NFE61PT181B1H9 | 180 +30%,-30% | 50 | 2 | 1000 | -25 to +85 |
| NFE61PT361B1H9 | 360 +20%,-20% | 50 | 2 | 1000 | -25 to +85 |
| NFE61PT681B1H9 | 680 +30%,-30% | 50 | 2 | 1000 | -25 to +85 |
| NFE61PT102E1H9 | 1000 +80%,-20% | 50 | 2 | 1000 | -25 to +85 |
| NFE61PT472C1H9 | 4700 +80%,-20% | 50 | 2 | 1000 | -25 to +85 |

■ Equivalent Circuit

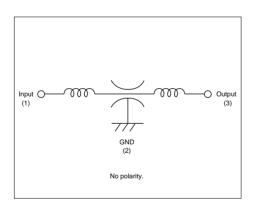

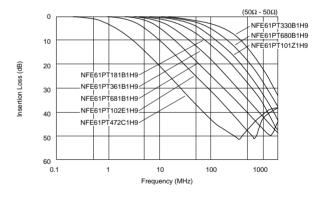




Chip EMIFIL® LC Combined Type for Large Current NFE61H Series

The T-type chip EMI Filter NFE61H series consists of a feedthrough capacitor and ferrite beads. Extending the operating conditions of NFE61P, NFE61H series can be used in an application set under severe operating conditions.

■ Features


- 1. These filters have an extended operating temperature range of -55 to +125 degree C.
- Its large rated current of 2A and low voltage drop due to small DC resistance are suitable for DC power line use.
- 3. The feedthrough capacitor realizes excellent high frequency characteristics.
- 4. The structure incorporates built-in ferrite beads which minimize resonance with surrounding circuits.
- 5. 33 to 3,300pF lineups can be used in signal lines.




(in mm)

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Operating Temperature Range (°C) |
|----------------|---------------------|------------------------|----------------------|--|----------------------------------|
| NFE61HT330U2A9 | 33 +30%,-30% | 100 | 2 | 1000 | -55 to +125 |
| NFE61HT680R2A9 | 68 +30%,-30% | 100 | 2 | 1000 | -55 to +125 |
| NFE61HT101Z2A9 | 100 +30%,-30% | 100 | 2 | 1000 | -55 to +125 |
| NFE61HT181C2A9 | 180 +30%,-30% | 100 | 2 | 1000 | -55 to +125 |
| NFE61HT361C2A9 | 360 +20%,-20% | 100 | 2 | 1000 | -55 to +125 |
| NFE61HT681D2A9 | 680 +30%,-30% | 100 | 2 | 1000 | -55 to +125 |
| NFE61HT102F2A9 | 1000 +80%,-20% | 100 | 2 | 1000 | -55 to +125 |
| NFE61HT332Z2A9 | 3300 +80%,-20% | 100 | 2 | 1000 | -55 to +125 |

■ Equivalent Circuit

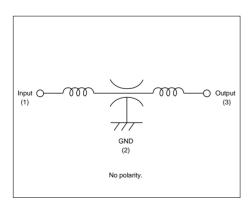

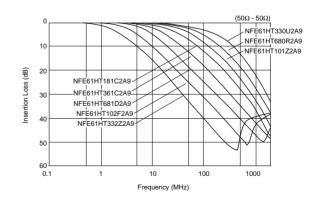

Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip Common Mode Choke Coils Part Numbering

Chip Common Mode Choke Coils

DL W 21 S N 371 S Q 2 L (Part Number)

Product ID

| Product ID | |
|------------|------------------------------|
| DL | Chip Common Mode Choke Coils |

2Structure

| Code | Structure |
|------|-----------------|
| W | Winding Type |
| М | Monolithic Type |
| Р | Film Type |

3Dimensions (LXW)

| Code | Dimensions (LXW) | EIA |
|------|------------------|-------|
| 0N | 0.85×0.65mm | 03025 |
| 11 | 1.25×1.0mm | 0504 |
| 21 | 2.0×1.2mm | 0805 |
| 31 | 3.2×1.6mm | 1206 |
| 2A | 2.0×1.0mm | 0804 |
| 2H | 2.5×2.0mm | 1008 |
| 5A | 5.0×3.6mm | 2014 |
| 5B | 5.0×5.0mm | 2020 |

4Туре

| Code | Туре | |
|------|--|--|
| s | Magnetically Shielded One Circuit Type | |
| D | Magnetically Shielded Two Circuit Type | |
| Н | Open Magnetic One Circuit Type | |
| G | Magnetically Monolithic Type (sectional winding) | |
| Т | Magnetically Shielded One Circuit Low Profile Type | |

6 Category

| Code | Category |
|------|---------------|
| N | Standard Type |

6Impedance

Typical impedance at 100MHz is expressed by three figures. The unit is in ohm (Ω) . The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

7Circuit

| Code | Circuit |
|------|------------------------|
| s | |
| М | Expressed by a letter. |
| Н | |

8 Features

| Code | Features |
|------|------------------------|
| L | |
| Q | Expressed by a letter. |
| Z | |

| Code | Number of Signal Lines |
|------|------------------------|
| 2 | Two Lines |
| 3 | Three Lines |
| 4 | Four Lines |
| | |

Packaging

| Code | Packaging | Series |
|------|-------------------------------|----------------------|
| K | Embossed Taping (ø330mm Reel) | DLW5AH/DLW5BS/DLW5BT |
| L | Embossed Taping (ø180mm Reel) | All Series |
| В | Bulk | All Series |



Chip Common Mode Choke Coils Film Type DLP0NS/11S/31S Series

DLP0NS Series

■ Features

- 1. Small size and tight dimensional tolerance Size: 0.85x0.65x0.45mm Tolerance: +-0.05mm
- 2. Useful impedance line-up from 67 ohm to 120 ohm
- 3. DLPONS series enables noise suppression for differential signal line without distortion in high-speed signal transmission due to its line impedance matching

■ Applications

Common mode noise suppression of high speed differential signal lines for USB 2.0, IEEE1394, LVDS


- 1. Note PCs
- 2. Cellular phones
- 3. Digital Still Cameras, Digital Video Cameras

| | 0.45±0.05 | 0.27±0.1 |
|-------|---|-------------|
| 10 10 | (1) (2) 90 (4) (3) (6) (6) (4) (4) (4) (6) (6) (6) (6) (6) (6) (6) (6) (6) (6 | : Electrode |
| | | (in mm) |


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|--------------------|------------------------|--|----------------------------|---------------------|
| DLP0NSN670HL2 | 67 ±20% | 110 | 5 | 100 | 12.5 | 2.4 ±25% |
| DLP0NSN900HL2 | 90 ±20% | 100 | 5 | 100 | 12.5 | 3.0 ±25% |
| DLP0NSN121HL2 | 120 ±20% | 90 | 5 | 100 | 12.5 | 3.8 ±25% |

Operating Temperature Range: -40°C to 85°C

■ Equivalent Circuit

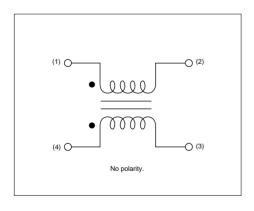

■ Impedance-Frequency (Typical)

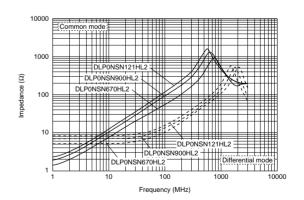


Continued on the following page.



Continued from the preceding page.

■ Transmission Characteristics

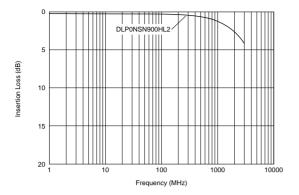

DLP11S Series


■ Features

- 1. Small size and tight dimensional tolerance Size: 1.25x1.0x0.82mm Tolerance: +-0.1mm
- 2. Useful impedance line-up from 67 ohm to 330 ohm
- DLP11S series enables noise suppression for differential signal line without distortion in high-speed signal transmission due to its high coupling
- 4. DLP11SN_HL2 series match with line impedance



Common mode noise suppression of high speed differential signal lines for USB, IEEE1394, LVDS

- 1. Note PCs, PDAs
- 2. Cellular phones
- 3. Digital Still Cameras, Digital Video Cameras

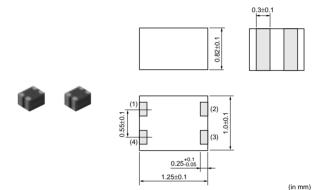


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|-----------------------|------------------------|--|----------------------------|------------------------|
| DLP11SN670SL2 | 67 ±20% | 180 | 5 | 100 | 12.5 | 1.3 ±25% |
| DLP11SN900HL2 | 90 ±20% | 150 | 5 | 100 | 12.5 | 1.5 ±25% |
| DLP11SN121SL2 | 120 ±20% | 140 | 5 | 100 | 12.5 | 2.0 ±25% |
| DLP11SN161SL2 | 160 ±20% | 120 | 5 | 100 | 12.5 | 2.7 ±25% |
| DLP11SN201HL2 | 200 ±20% | 110 | 5 | 100 | 12.5 | 3.1 ±25% |
| DLP11SN241HL2 | 240 ±20% | 100 | 5 | 100 | 12.5 | 3.5 ±25% |
| DLP11SN281HL2 | 280 ±20% | 90 | 5 | 100 | 12.5 | 4.2 ±25% |
| DLP11SN331HL2 | 330 ±20% | 80 | 5 | 100 | 12.5 | 4.9 ±25% |
| | • | | • | | | |

Operating Temperature Range: -40°C to 85°C




sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

■ Equivalent Circuit

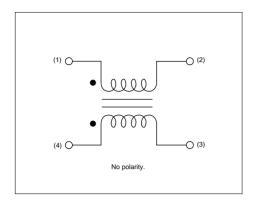

■ Transmission Characteristics

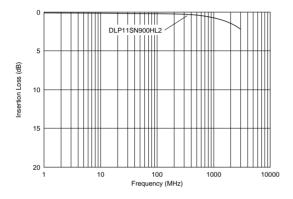

DLP31S Series


DLP31S series is chip common mode choke coil that realizes high impedance in a small size with ferrite material technology and film processing technology. DLP31S series has excellent performance at high frequency range. It is suitable for differential signal line application.


■ Features

- 1. Small size, low profile, SMD. 3.2x1.6x1.15mm (Tolerance: 0.15mm)
- 2. High common mode impedance (550 ohm at 100MHz typ.) in small size
- 3. DLP31S suppresses high frequency noise that was unable to be suppressed with existing common mode choke coils. Suitable for differential signal lines like USB, because DLP31S does not provide distortion to high speed signal transmission due to its high coupling (coupling coefficient: 0.98 min.)

■ Applications

- 1. USB lines of PCs, peripheral equipment
- 2. LVDS lines of Note-PCs, LCDs
- 3. USB lines of digital AV equipment such as digital cameras

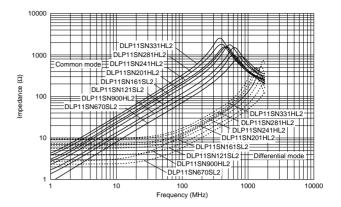

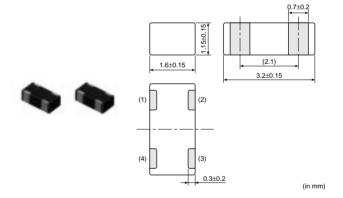



| 7 | | 7 | |
|---|---|---|--|
| | , | u | |
| | ś | 7 | |
| | | | |

| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|--------------------|------------------------|--|----------------------------|---------------------|
| DLP31SN121ML2 | 120 ±20% | 100 | 16 | 100 | 40 | 2.0 max. |
| DLP31SN221ML2 | 220 ±20% | 100 | 16 | 100 | 40 | 2.5 max. |
| DLP31SN551ML2 | 550 ±20% | 100 | 16 | 100 | 40 | 3.6 max. |

Operating Temperature Range: -40°C to 85°C

■ Equivalent Circuit

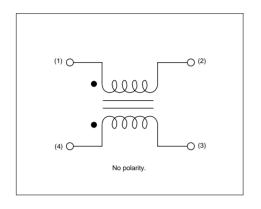

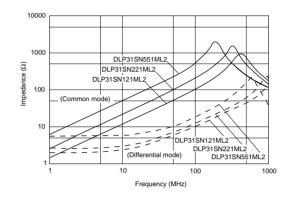

Chip Common Mode Choke Coils Arrays Film Type DLP2AD/31D Series

DLP2AD Series

■ Features

- 1. 2 components are included in 2.0x1.0mm size
- 2. Low profile: typ. 0.82mm
- 3. High common mode impedance characteristics (max. 280 ohm, at 100MHz)
- 4. DLP2AD can suppress common mode noise without damage to signal wave.
- 5. DLP2AD match with line impedance.

■ Applications

Common mode noise suppression of high speed differential signal lines for USB, IEEE1394 LVDS, DVI, HDMI


- 1. Main board of personal computers, Note PCs
- 2. Printers, Scanners
- 3. LCD monitors
- 4. Game equipment
- 5. PC peripheral equipment

| | 0.25±0.1 | 0.82±0.1 |
|------|---|----------|
| (the | (1) (2) (3) (4) 91 91 (5) (6) (7) (8) 2.0±0.1 | |


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|--------------------|------------------------|--|----------------------------|------------------------|
| DLP2ADN670HL4 | 67 ±20% | 140 | 5 | 100 | 12.5 | 1.3 ±25% |
| DLP2ADN900HL4 | 90 ±20% | 130 | 5 | 100 | 12.5 | 1.7 ±25% |
| DLP2ADN121HL4 | 120 ±20% | 120 | 5 | 100 | 12.5 | 2.0 ±25% |
| DLP2ADN161HL4 | 160 ±20% | 100 | 5 | 100 | 12.5 | 2.5 ±25% |
| DLP2ADN201HL4 | 200 ±20% | 90 | 5 | 100 | 12.5 | 3.2 ±25% |
| DLP2ADN241HL4 | 240 ±20% | 80 | 5 | 100 | 12.5 | 3.8 ±25% |
| DLP2ADN281HL4 | 280 ±20% | 80 | 5 | 100 | 12.5 | 4.6 ±25% |

Operating Temperature Range: -40°C to 85°C

■ Equivalent Circuit

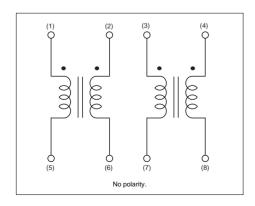

■ Impedance-Frequency (Typical)

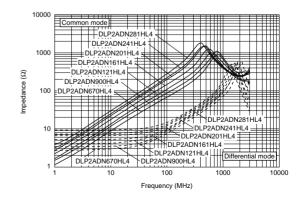


Continued on the following page.




⚠Note

• This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.



■ Transmission Characteristics

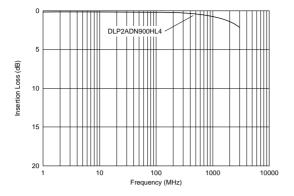

DLP31D Series

DLP31D series is chip common mode choke coil array which realizes high coupling and high impedance in a small size with ferrite material technology and thin film processing technology.


■ Features

- 1. 2 components are included in 3.2x1.6mm
- 2. Thin type 1.15mm
- 3. High common mode Impedance characteristics (max. 440 ohm, at 100MHz)
- 4. DLP31D can suppress common mode noise without damage to signal wave.

■ Applications

Common mode noise suppression of high speed differential signal lines for USB, IEEE1394, LVDS


- 1. Main board of personal computers, note PCs
- 2. Printers, Scanners
- 3. LCD monitors
- 4. Game equipment
- 5. PC peripheral equipment

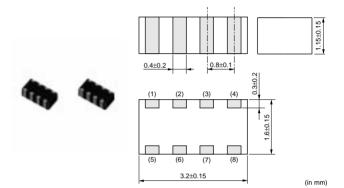


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|--------------------|------------------------|--|----------------------------|------------------------|
| DLP31DN900ML4 | 90 ±20% | 160 | 10 | 100 | 25 | 1.1 max. |
| DLP31DN131ML4 | 130 ±20% | 120 | 10 | 100 | 25 | 1.6 max. |
| DLP31DN201ML4 | 200 ±20% | 100 | 10 | 100 | 25 | 2.2 max. |
| DLP31DN321ML4 | 320 ±20% | 80 | 10 | 100 | 25 | 3.5 max. |
| DLP31DN441ML4 | 440 ±20% | 70 | 10 | 100 | 25 | 4.3 max. |

Operating Temperature Range: -40°C to 85°C

■ Equivalent Circuit

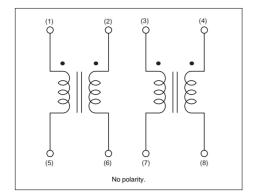

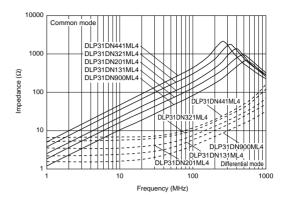

sales representatives or product engineers before ordering. This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Chip Common Mode Choke Coils Monolithic Type DLM11G/2HG Series

DLM11G Series

Small size chip common mode choke coil. Suitable for noise suppression at audio line for mobile phone.

■ Features

- 1. Small size: 1.25x1.0x0.5mm
- 2. Noise suppression for personal mobile equipment
- 3. Enables suppression of both differential mode and common mode noise.

Common mode impedance:

600 ohm at 100MHz (typ.)

Differential mode impedance:

1200 ohm at 100MHz (typ.)

4. Available for high density mounting (Narrow pitch)

Applications


- Audio line for mobile phones (Microphones, Speakers, Headphones)
- 2. Handsets
- Personal mobile equipment (PDAs, Digital still cameras, MD players)


| \$ | (1) (2) (2) (3) (3) (3) (4) (0.2±0.15 | 0.5±0.1 |
|-----------|---------------------------------------|---------------------|
| | 1.0±0.15 | : Electrode (in mm) |

| Part Number | (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|----------------------------|-----------------------|------------------------|--|----------------------------|------------------------|
| DLM11GN601SZ2 | 600 ±25% | 100 | 5 | 100 | 25 | 0.8 max. |

Operating Temperature Range: -40°C to 85°C

■ Equivalent Circuit

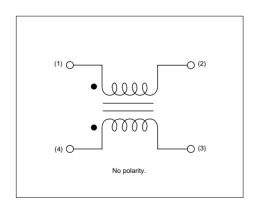

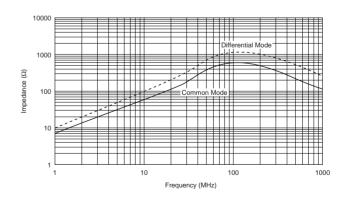

DLM2HG Series


DLM2HG Series is a high quality noise suppression filter for headphone lines of high quality digital music equipment.

■ Features

- 1. Low distortion in audio signal, low crosstalk
- 2. Effective in noise suppression both of common mode and of differential mode
- 3. Small size, low profile, SMD 2.5x2.0x1.2mm

■ Applications


- 1. Headphone lines of digital music equipment such as DVDs, MD players
- 2. Headphone lines of Note-PCs, PDAs

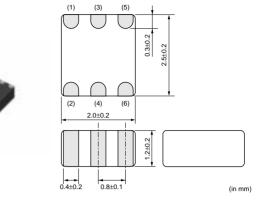


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|--------------------|------------------------|--|----------------------------|------------------------|
| DLM2HGN601SZ3 | 600 ±25% | 100 | 16 | 100 | 100 | 0.40 max. |

Operating Temperature Range: -40°C to 85°C

■ Equivalent Circuit

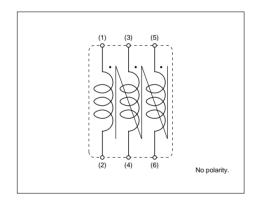

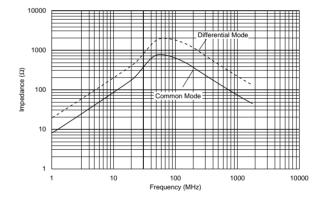




Chip Common Mode Choke Coils Wire Wound Type DLW21S/21H/31S Series

DLW21S Series

■ Features (DLW21S_SQ Series)

- 1. DLW21S series realizes small size and low profile. 2.0x1.2x1.2mm
- 2. High common mode impedance at high frequency effects excellent noise suppression performance.
- 3. Various common mode impedance items of 67 to 370 ohm can be used, considering noise level and signal frequency.
- DLW21S series enables noise suppression for differential signal line without distortion in high speed signal transmission due to its high coupling
- 5. Small dimension enables higher density packaging.





1.2±0.2


■ Applications

- 1. USB lines of PC, Peripheral equipment
- 2. LVDS lines of Note-PCs, LCDs
- USB lines of Small digital AV equipment such as digital cameras


■ Features (DLW21S_HQ Series)

- 1. Small size: 2.0x1.2x1.2mm
- Common mode impedance items of 67, 90 and 120 ohm, and they can be used for various differential signal lines.
- 3. DLW21S_H series match with line impedance of 100 ohm line.
- 4. DLW21S_H series can suppress noise for the high-speed differential signal lines which are used in digital AV interfaces, such as HDMI and DVI, without damage to the signal wave.





2.0+0.2



(in mm)

DLW21S_HQ Series

Applications


Common mode noise suppression of high speed differential signal lines for HDMI, DVI, USB2.0, IEEE1394, LVDS.

- 1. DVD Recorders
- 2. LCD TVs, LCD monitors
- 3. PCs


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|--------------------|------------------------|--|----------------------------|---------------------|
| DLW21SN670SQ2 | 67 ±25% | 400 | 50 | 10 | 125 | 0.25 max. |
| DLW21SN900SQ2 | 90 ±25% | 330 | 50 | 10 | 125 | 0.35 max. |
| DLW21SN121SQ2 | 120 ±25% | 370 | 50 | 10 | 125 | 0.30 max. |
| DLW21SN181SQ2 | 180 ±25% | 330 | 50 | 10 | 125 | 0.35 max. |
| DLW21SN261SQ2 | 260 ±25% | 300 | 50 | 10 | 125 | 0.40 max. |
| DLW21SN371SQ2 | 370 ±25% | 280 | 50 | 10 | 125 | 0.45 max. |
| DLW21SN670HQ2 | 67 ±25% | 320 | 20 | 10 | 50 | 0.31 max. |
| DLW21SN900HQ2 | 90 ±25% | 280 | 20 | 10 | 50 | 0.41 max. |
| DLW21SN121HQ2 | 120 ±25% | 280 | 20 | 10 | 50 | 0.41 max. |


■ Equivalent Circuit

DLW21S




■ Impedance-Frequency (Typical)

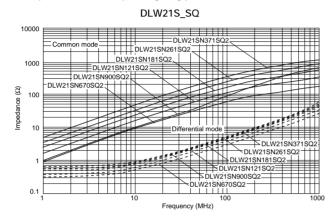

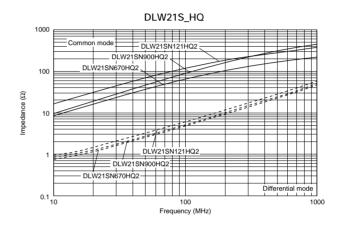

■ Transmission Characteristics

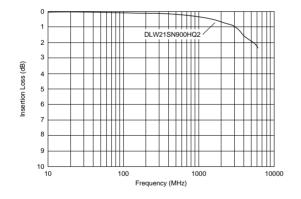

sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.


DLW21H Series

■ Features

- Small size and low profile (2.0x1.2x0.9mm).
 Excellent noise suppression for sets of small and thin size.
- 2. High common mode impedance at high frequency effects excellent noise suppression performance.
- 3. Various common mode impedance from 67 to 180 ohm can be used, selected depending on noise level and signal frequency.
- Suitable for differential signal line like USB2.0, IEEE1394 and LVDS, because DLW21H does not provide distortion to high speed signal transmission due to its high coupling. (USB2.0: DLW21HN900SQ2)
- 5. Small dimension enables higher density mounting




Common mode noise suppression of signal lines in high speed and high density digital equipment such as PCs and peripherals and telecommunications equipment.

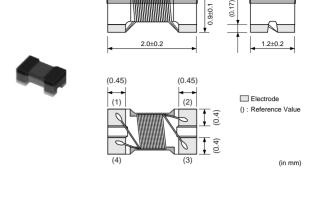


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|-----------------------|------------------------|--|----------------------------|------------------------|
| DLW21HN670SQ2 | 67 ±25% | 330 | 50 | 10 | 125 | 0.35 max. |
| DLW21HN900SQ2 | 90 ±25% | 330 | 50 | 10 | 125 | 0.35 max. |
| DLW21HN121SQ2 | 120 ±25% | 280 | 50 | 10 | 125 | 0.45 max. |
| DLW21HN181SQ2 | 180 ±25% | 250 | 50 | 10 | 125 | 0.50 max. |

Operating Temperature Range: -40°C to 85° C

■ Equivalent Circuit

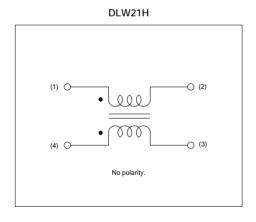

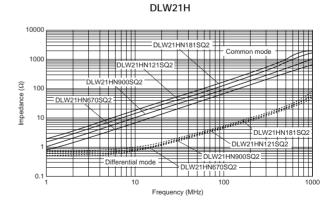


DLW31S Series

■ Features

- 1. DLW31S realizes small size and low profile. 3.2x1.6x1.9mm.
- 2. High common mode impedance at high frequency effects excellent noise suppression performance.
- 3. Various common mode impedance items of 90 to 2200 ohm can be used, considering noise level and signal frequency.
- 4. DLW31S series enables noise suppression for differential signal lines without distortion in high speed signal transmission due to its high coupling.
- 5. Small dimension enables higher density packaging.

■ Applications


- 1. USB lines of PCs, Peripheral equipment
- 2. LVDS lines of Note-PCs, LCDs

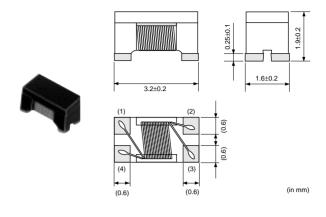


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|--------------------|------------------------|--|----------------------------|------------------------|
| DLW31SN900SQ2 | 90 ±25% | 370 | 50 | 10 | 125 | 0.3 max. |
| DLW31SN161SQ2 | 160 ±25% | 340 | 50 | 10 | 125 | 0.4 max. |
| DLW31SN261SQ2 | 260 ±25% | 310 | 50 | 10 | 125 | 0.5 max. |
| DLW31SN601SQ2 | 600 ±25% | 260 | 50 | 10 | 125 | 0.8 max. |
| DLW31SN102SQ2 | 1000 ±25% | 230 | 50 | 10 | 125 | 1.0 max. |
| DLW31SN222SQ2 | 2200 ±25% | 200 | 50 | 10 | 125 | 1.2 max. |

Operating Temperature Range: -40°C to 85°C

■ Equivalent Circuit

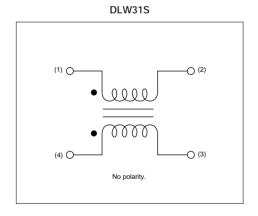

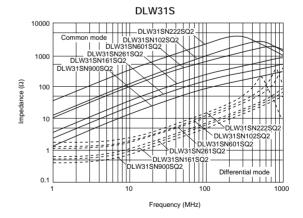



Chip Common Mode Choke Coils Wire Wound Type for Large Current DLW5AH/5BS/5BT Series

DLW5AH/5BS Series


DLW5AH/5BS series is a high performance wound type chip common mode choke coil.


■ Features

- 1. High impedance (max. of 4000ohm at 100MHz: DLW5AH) enables great noise suppression.
- 2. Large rated current (max. of 5A) is suitable for power line use.
- DLW5AH/BS series does not damage high speed signal due to high coupling common mode choke coil structure
- 4. Automatic mounting can be applied.

■ Applications

- 1. DC power lines in AC adapters of Portable equipment
- 2. DC power lines of DC-DC converters, battery chargers

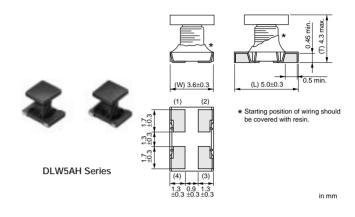


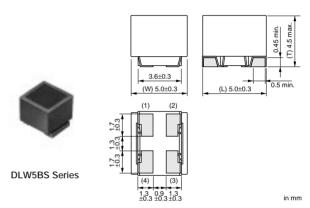


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|--------------------|------------------------|--|----------------------------|------------------------|
| DLW5AHN402SQ2 | 4000 (Typ.) | 200 | 50 | 10 | 125 | 3.0 max. |
| DLW5BSN191SQ2 | 190 (Typ.) | 5000 | 50 | 10 | 125 | 0.02 max. |
| DLW5BSN351SQ2 | 350 (Typ.) | 2000 | 50 | 10 | 125 | 0.04 max. |
| DLW5BSN102SQ2 | 1000 (Typ.) | 1500 | 50 | 10 | 125 | 0.06 max. |
| DLW5BSN152SQ2 | 1500 (Typ.) | 1000 | 50 | 10 | 125 | 0.1 max. |
| DLW5BSN302SQ2 | 3000 (Typ.) | 500 | 50 | 10 | 125 | 0.3 max. |

Operating Temperature Range: -25°C to 85°C


■ Equivalent Circuit

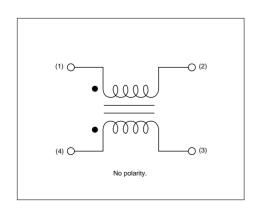

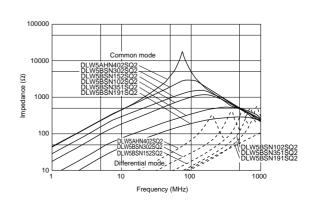

■ Derating of Rated Current



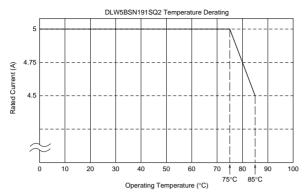

DLW5BT Series

Low profile (h=2.5mm) chip common mode choke coil. Suitable for noise suppression at DC power line.

■ Features

3


- 1. Low profile (h=2.5mm)
- 2. Small size (5.0x5.0mm) and high rated current (1.5 to 6A)
- 3. High common mode Impedance (max. 1400 ohm, at 100MHz)



Noise suppression for power line

- 1. Power line equipment
 - -DC-DC converters
 - -Battery chargers
- 2. Portable equipment
 - -PDAs (Personal Digital Assistance)
 - -Note PCs
 - -Printers






| 3.6±0.3 (W) 5.0±0.3 | 0.5 min. (L) 5.0±0.3 |
|--|-------------------------|
| (1) (2) (3) (4) (3) (1.3±0.3 0.9±0.3 | : Electrode |


| Part Number | Common Mode Impedance (at 100MHz, 20°C) (ohm) | Rated Current (mA) | Rated Voltage (Vdc) | Insulation Resistance (min.) (M ohm) | Withstand Voltage (Vdc) | DC Resistance (ohm) |
|---------------|---|-----------------------|------------------------|--|----------------------------|------------------------|
| DLW5BTN101SQ2 | 100 (Typ.) | 6000 | 50 | 10 | 125 | 0.009 ±40% |
| DLW5BTN251SQ2 | 250 (Typ.) | 5000 | 50 | 10 | 125 | 0.014 ±40% |
| DLW5BTN501SQ2 | 500 (Typ.) | 4000 | 50 | 10 | 125 | 0.019 ±40% |
| DLW5BTN102SQ2 | 1000 (Typ.) | 2000 | 50 | 10 | 125 | 0.024 ±40% |
| DLW5BTN142SQ2 | 1400 (Typ.) | 1500 | 50 | 10 | 125 | 0.040 ±40% |

Operating Temperature Range: -25°C to 85°C

■ Equivalent Circuit

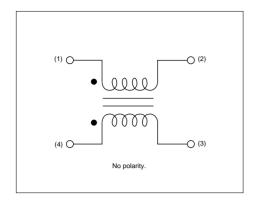


■ Impedance-Frequency (Typical)

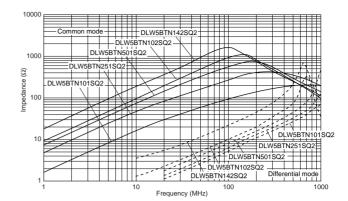

■ Derating of Rated Current

DLW5BTN101/251/501

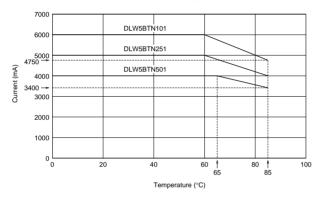

Block Type EMIFIL® BNX Series

SMD Type


BNX022 series is SMD type high performance and provides excellent noise suppression on DC power lines.

■ Features

- 1. Large rated current (10A) and Low DC Resistance. (0.43m ohm - Typ.)
- 2. High insertion loss characteristic over a wide frequency range of 1MHz to 1GHz.
- 3. Mounting area and volume is reduced.
- 4. Effective for impulse noise such as electrostatic discharge or spike noise.

■ Applications

- 1. Displays (PDP/LCD-TV)
- 2. Digital AV equipment
- 3. Amusement equipment
- 4. PC peripheral equipment
- 5. Industry equipment, measurement equipment, power supplies

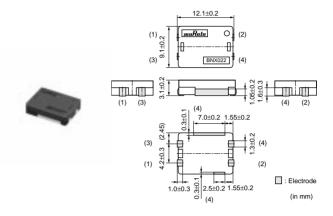


| Part Number | Voltage (Vdc) | Withstand Voltage (Vdc) | Current (A) | Resistance (min.) (M ohm) | Insertion Loss |
|-------------|------------------|-------------------------------|----------------|------------------------------|--|
| BNX022-01 | 50 | 125 | 10 | 500 | 1MHz to 1GHz:35dB min.(20 to 25degree C line impedance=50 ohm) |

Operating Temperature Range: -40°C to 125°C


In operating temperatures exceeding +85°C, derating of current is necessary.

Please refer to p.129, "Derating of Rated Current".

■ Equivalent Circuit

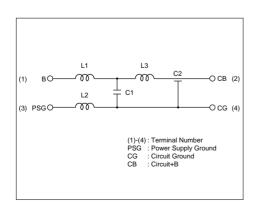

■ Insertion Loss Characteristics (Typical)

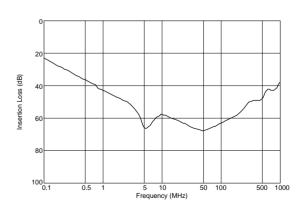

Continued on the following page.



Note


This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Continued from the preceding page.

■ Derating of Rated current

In operating temperatures exceeding +85°C, derating of current is necessary for BNX022 series. Please apply the derating curve shown in chart according to the operating temperature.

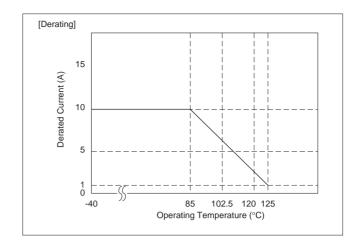

Lead Type


The block type "EMIFIL" BNX series incorporates through-type capacitor, monolithic chip capacitors and bead. The BNX is high performance for use in DC power circuits.

■ Features

- 1. The filter enables obtaining high insertion loss in wide frequency ranges from 0.5MHz to 1GHz.
- 2. Effective for impulse noise such as electro static discharge or spike noise.
- 3. There are no connection routes in the current circuits, thus ensuring highly reliable performance.

Applications


- 1. Displays (PDP/LCD-TV)
- 2. Digital AV equipment
- 3. Amusement equipment
- 4. PC peripheral equipment
- 5. Industry equipment

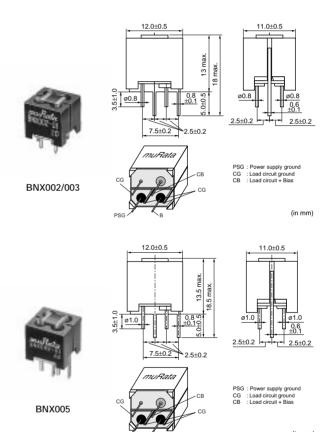

| Part Number | Rated Voltage (Vdc) | Withstand Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Insertion Loss |
|-------------|---------------------------|-------------------------------|-------------------------|--|--|
| BNX002-01 | 50 | 125 | 10 | 100 | 1MHz to 1GHz:40dB min.(20 to 25degree C line impedance=50 ohm) |
| BNX003-01 | 150 | 375 | 10 | 100 | 5MHz to 1GHz:40dB min.(20 to 25degree C line impedance=50 ohm) |
| BNX005-01 | 50 | 125 | 15 | 100 | 1MHz to 1GHz:40dB min.(20 to 25degree C line impedance=50 ohm) |

Operating Temperature Range: -30°C to 85°C

■ Equivalent Circuit

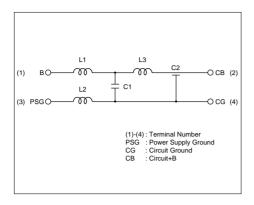

Lead Type Low Profile

The block type "EMIFIL" BNX010 series is high performance and BNX series provide excellent noise suppression on DC power lines.

■ Features

1. High insertion loss characteristic over a wide frequency band range.


1MHz to 1GHz: 40dB min (BNX012) 100kHz to 1GHz: 40dB min (BNX016)


- 2. Large rated current (15A) and Low Rdc (0.8m ohm-typ.)
- 3. Low profile (height: 8.0mm except lead terminal)
- 4. Effective for impulse noise such as electro static discharge or spike noise.

■ Applications

- 1. Displays (PDP/LCD-TV)
- 2. Digital AV equipment
- 3. Amusement equipment
- 4. PC peripheral equipment
- 5. Industry equipment

■ Insertion Loss Characteristics (Typical)

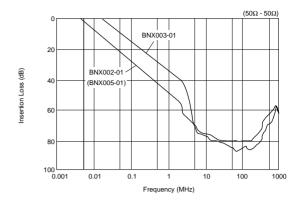

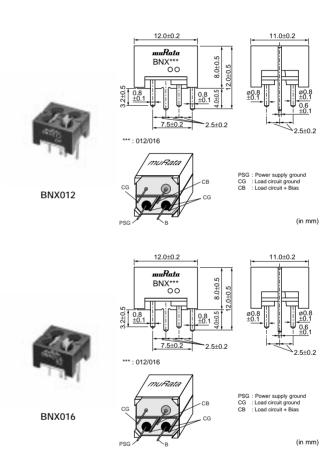


| Part Number | Rated Voltage (Vdc) | Withstand Voltage (Vdc) | Rated Current (A) | Insulation Resistance (min.) (M ohm) | Insertion Loss |
|-------------|---------------------------|-------------------------------|-------------------------|--|--|
| BNX012-01 | 50 | 125 | 15 | 500 | 1MHz to 1GHz:40dB min.(20 to 25degree C line impedance=50 ohm) |
| BNX016-01 | 25 | 62.5 | 15 | 50 | 100kHz to 1GHz:40dB min.(20 to 25degree C line impedance=50 ohm) |

Operating Temperature Range: -40°C to 125°C

In operating temperatures exceeding +85°C, derating of current is necessary.

Please refer to p.131, "Derating of Rated Current".

■ Equivalent Circuit

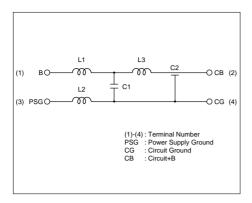


■ Notice


Rating

In operating temperatures exceeding +85°C, derating of current is necessary for BNX010 series. Please apply the derating curve shown in chart according to the operating temperature.

Connecting ± power line

In case of using \pm power line, please connect to each terminal as shown.

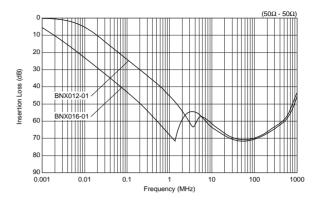


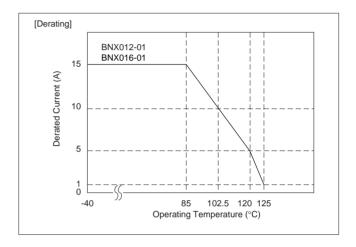




Noise Suppression Effect of BNX Series

■Suppression of DC Side Ripple of the Switching Power Supply

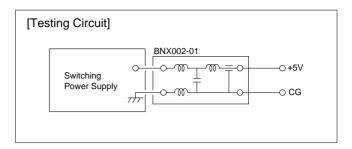

| Type of Filter | EMI Suppression Effect | Description |
|--------------------------------|---------------------------|---|
| When BNX002 is not used | +5.0V → 50µs/div 0.2V/div | High frequency noise, max. 0.5V, can be seen. |
| When BNX002 is used | +5.0V → 50µs/div 0.2V/div | Noise can be almost suppressed by BNX002. |

■Example of Impulse Noise Suppression

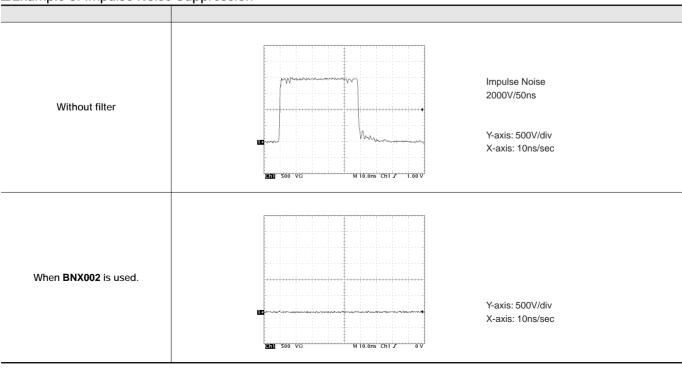



Ferrite Beads Inductors Part Numbering

Ferrite Beads Inductors

(Part Number)

BL 02 RN 2 R1 M 2 B

Product ID

| Product ID | |
|------------|-------------------------|
| BL | Ferrite Beads Inductors |

2Series

| Code | Series |
|------|-----------------|
| 01 | Beads ø3.6 |
| 02 | Beads ø3.4 |
| 03 | Beads ø2.3 max. |

3Beads Core Material

| Code | Beads Core Material |
|------|---------------------|
| RN | Standard Type |

4 Numbers of Beads Core

| Code | Numbers of Beads Core |
|------|-----------------------|
| 1 | 1 |
| 2 | 2 |

5Lead Type

| Code | Lead Type | Series |
|------|--|-----------|
| A1 | Axial Straight Type | BL01 |
| A2 | Axial Crimp Type | BL01 |
| R1 | Radial Straight Type | BL02/BL03 |
| R2 | Radial Straight and Wave Formed Leads Type | BL02 |
| R3 | Radial Crimp Type | BL02 |

6 Lead Length, Space

| Code | Lead Length, Space | Series |
|------|-----------------------------|-----------|
| Α | Bulk, Axial Type, 3.7mm | |
| D | Bulk, Axial Type, 45.0mm | DI 04 |
| E | Taping Axial Type, 26.0mm | BL01 |
| F | Taping, Axial Type, 52.0mm | |
| J | Bulk, Radial Type, 5.0mm | |
| М | Bulk, Radial Type, 10.0mm | |
| N | Taping, Radial Type, 16.5mm | BL02/BL03 |
| Р | Taping, Radial Type, 18.5mm | |
| Q | Taping, Radial Type, 20.0mm | |

7Lead Diameter

| Code | Lead Diameter |
|------|---------------|
| 1 | ø0.60mm |
| 2 | ø0.65mm |

8 Packaging


| Code | Packaging | Series |
|------|---------------------|----------------|
| Α | Ammo Pack | BL01/BL02/BL03 |
| В | Bulk | All Series |
| J | Paper Reel (ø320mm) | BL01 |



Ferrite Beads Inductors BL01/02/03 Series

■ Features


BL01/02/03 series are ferrite beads with lead wires to produce a high frequency loss for suppression of noise. Simple construction and easy-to-use, effective for low impedance circuits such as power supplies and grounds. Effective also for preventing overshoot and undershoot of digital signal in clocks or the like, and suppressing the higher harmonic wave. Suitable for prevention of abnormal oscillation at high frequency amplifying circuit.

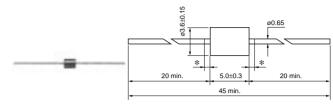


*Coating extending on leads : 1.5 max


BL01RN1A1D2B

(in mm)

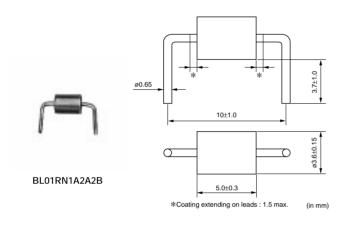


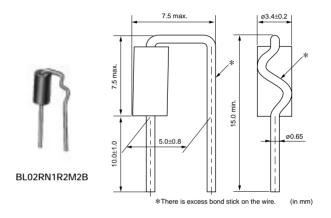


























| Part Number | Rated Current (A) | Operating Temperature Range (°C) |
|--------------|----------------------|--|
| BL01RN1A1D2B | 7 | -40 to +85 |
| BL01RN1A1E1A | 6 | -40 to +85 |
| BL01RN1A1F1J | 6 | -40 to +85 |
| BL01RN1A2A2B | 7 | -40 to +85 |
| BL02RN1R2M2B | 7 | -40 to +85 |
| BL02RN1R2N1A | 6 | -40 to +85 |
| BL02RN1R2P1A | 6 | -40 to +85 |
| BL02RN1R2Q1A | 6 | -40 to +85 |
| BL02RN1R3J2B | 7 | -40 to +85 |
| BL02RN1R3N1A | 6 | -40 to +85 |
| BL02RN2R1M2B | 7 | -40 to +85 |
| BL02RN2R1N1A | 6 | -40 to +85 |
| BL02RN2R1P1A | 6 | -40 to +85 |
| BL02RN2R1Q1A | 6 | -40 to +85 |
| BL02RN2R3J2B | 7 | -40 to +85 |
| BL02RN2R3N1A | 6 | -40 to +85 |
| BL03RN2R1M1B | 6 | -40 to +85 |
| BL03RN2R1N1A | 6 | -40 to +85 |
| BL03RN2R1P1A | 6 | -40 to +85 |
| BL03RN2R1Q1A | 6 | -40 to +85 |


Please refer to p.178, "Ferrite Beads Inductors Packaging" for Dimensions of Part Numbers except 'B' for the last code.

■ Equivalent Circuit

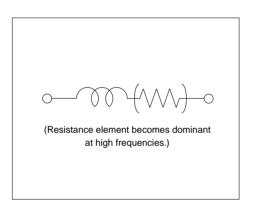

■ Impedance-Frequency Characteristics

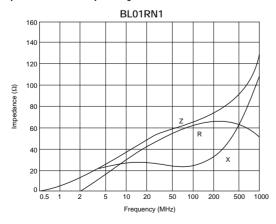


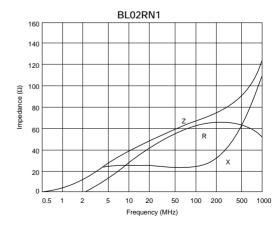


Continued on the following page.



■ Impedance-Frequency Characteristics

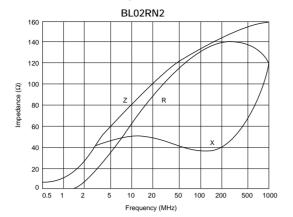

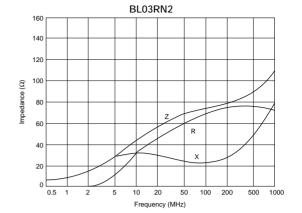

136



Disc Type EMIFIL® Part Numbering

Disc Type EMIFIL®

(Part Number) DS | S | 9 | H | B3 | 2E | 271

Product ID

| Product ID | |
|------------|---------------------------|
| DS | Three-terminals Capacitor |

2Structure

| Code | Structure |
|------|-----------------------------|
| N | No Ferrite Beads Type |
| s | Built-in Ferrite Beads Type |
| Т | with Ferrite Beads Type |

Style

| Code | Style |
|------|----------------------|
| 6 | Diameter 8.0mm max. |
| 9 | Diameter 12.0mm max. |

4 Category

| Code | Category |
|------|-----------------|
| N | for General Use |
| Н | for Heavy-duty |

6Temperature Characteristics

| Code | Capacitance Change | |
|-------|---|--|
| B3/P3 | ±10% (Temperature Range : -25°C to +85°C) | |
| C5 | ±22% (Temperature Range : -25°C to +85°C) | |
| D3/T3 | +20/-30% (Temperature Range : -25°C to +85°C) | |
| E3 | +20/-55% (Temperature Range : -25°C to +85°C) | |
| E5 | +22/-56% (Temperature Range : -25°C to +85°C) | |
| F3 | +30/-80% (Temperature Range : -25°C to +85°C) | |
| Z8 | +30/-85% (Temperature Range : -10°C to +60°C) | |

6Rated Voltage

| Code | Rated Voltage |
|------|---------------|
| 1C | 16V |
| 1H | 50V |
| 2A | 100V |
| 2E | 250V |

Capacitance

Expressed by three figures. The unit is in pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

8Lead Type/9Packaging

| Code | Lead Type | Lead Length* (in mm) | Packaging | Series | |
|------|------------|----------------------|---------------------|----------------------------------|--|
| Q55B | | 25.0 min. | Bulk | All series | |
| Q50B | 1 | 4.0±0.5 | | DST9N/H | |
| Q52B | Straight | 6.0±1.0 | | DST9N | |
| Q54B | | 4.0±0.5 | | DSN6/9, DSS6/9 | |
| Q56B | | 6.0±1.0 | | | |
| T41B | la salas a | 4.0±0.5 | | Desch | |
| T51B | Incrimp | 25.0 min. | DSS6N | | |
| Q91J | | 20.0±1.0 | | | |
| Q92J | | 16.5±1.0 | Paper Reel (ø320mm) | DSS9N/H | |
| Q93J | Ctroight | 18.5±1.0 | | | |
| Q91A | Straight | 20.0±1.0 | | DS□6, DSN9N/H | |
| Q92A | - | 16.5±1.0 | 1 | All series except DSS9N/H | |
| Q93A | | 18.5±1.0 | Ammo Pack | | |
| U21A | la orine a | 16.5±1.0 | | | |
| U31A | Incrimp | 18.5±1.0 | | DSS6N | |


^{*}Lead Distance between Reference and Bottom Planes except Bulk.




Disc Type EMIFIL® DSN6/DSS6 Series


■ Features


DS_6 is a compact, high performance lead type EMI suppression filter which can be mounted 2.54mm pitch. Its three terminal structure enables nice high frequency performance.

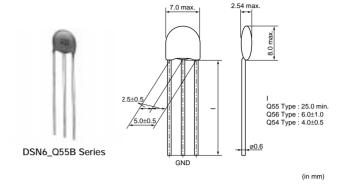














*1 There may be a hole on the top of ferrite beads, which cause no characteristics deterioration.
*2 Bottom of the ferrite beads may not be level with each other.

DSN6 Series


| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------|------------------------|----------------------|----------------------------------|
| DSN6NC51H220 | 22 +20%,-20% | 50 | 6 | -25 to +85 |
| DSN6NC51H330 | 33 +20%,-20% | 50 | 6 | -25 to +85 |
| DSN6NC51H470 | 47 +20%,-20% | 50 | 6 | -25 to +85 |
| DSN6NC51H101 | 100 +20%,-20% | 50 | 6 | -25 to +85 |
| DSN6NC51H271 | 270 +20%,-20% | 50 | 6 | -25 to +85 |
| DSN6NC51H102 | 1000 +20%,-20% | 50 | 6 | -25 to +85 |
| DSN6NC51H222 | 2200 +20%,-20% | 50 | 6 | -25 to +85 |
| DSN6NZ81H103 | 10000 +80%,-20% | 50 | 6 | -25 to +85 |

Please refer to Part Numbering for Type and Length of Lead.




Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

■ Equivalent Circuit

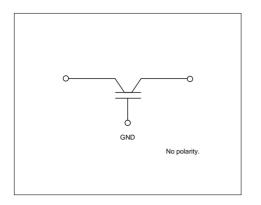

■ Insertion Loss Characteristics (Typical)

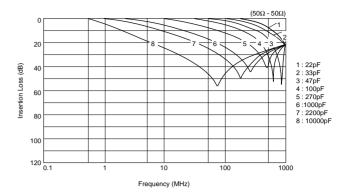



Built-in Ferrite Beads DSS6 Series Incrimp Type

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------|------------------------|----------------------|----------------------------------|
| DSS6NC52A220 | 22 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A330 | 33 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A470 | 47 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A101 | 100 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A151 | 150 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A221 | 220 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A271 | 270 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A471 | 470 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A102 | 1000 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NE52A222 | 2200 +80%,-20% | 100 | 6 | -25 to +85 |
| DSS6NZ82A103 | 10000 +30%,-30% | 100 | 6 | -25 to +85 |
| DSS6NF31C223 | 22000 +80%,-20% | 16 | 6 | -25 to +85 |

Please refer to Part Numbering for Type and Length of Lead.

■ Equivalent Circuit

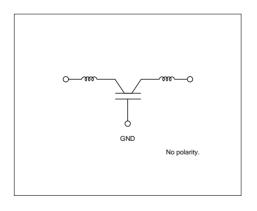

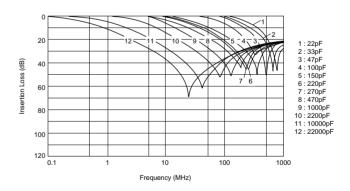



Built-in Ferrite Beads DSS6 Series Straight Type

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------|------------------------|----------------------|----------------------------------|
| DSS6NC52A220 | 22 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A330 | 33 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A470 | 47 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A101 | 100 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A151 | 150 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A221 | 220 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A271 | 270 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A471 | 470 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NC52A102 | 1000 +20%,-20% | 100 | 6 | -25 to +85 |
| DSS6NE52A222 | 2200 +80%,-20% | 100 | 6 | -25 to +85 |
| DSS6NZ82A103 | 10000 +30%,-30% | 100 | 6 | -25 to +85 |
| DSS6NF31C223 | 22000 +80%,-20% | 16 | 6 | -25 to +85 |

Please refer to Part Numbering for Type and Length of Lead.

■ Equivalent Circuit

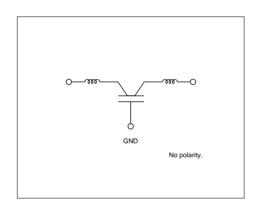

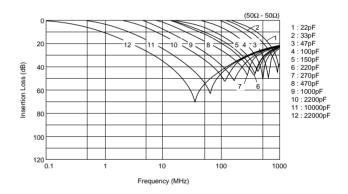



Disc Type EMIFIL® Broad Type DSN9/DSS9/DST9 Series


■ Features

DS_9 is a basic type EMI suppression filter which can obtain high insertion loss in a wide frequency range. Its three terminal structure enables nice high frequency performance. DSS9NP32A222/DSS9NT31H223 are low distortion types for audio circuits.


■ Supplement

Diameter of lead is 0.6mm for taping type. Taping type is three terminal in line arrangement.










- *11 Coating extending on leads does not exceed the tangent line.

 Exposed electrode, if any, is covered by solder, etc.

 *2 There should not be the exposure of the ferrite bead if a hole is in top of filter, the ferrite bead should not be exposed.








DSN9 Series


| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------|------------------------|----------------------|----------------------------------|
| DSN9NC52A271 | 270 +20%,-20% | 100 | 7 | -25 to +85 |
| DSN9NC52A222 | 2200 +20%,-20% | 100 | 7 | -25 to +85 |
| DSN9NC51H223 | 22000 +50%,-20% | 50 | 7 | -25 to +85 |
| DSN9NC51C104 | 100000 +20%,-20% | 16 | 7 | -25 to +85 |

Rated current is 6A for taping type and its lead diameter is phi 0.6mm. Please refer to Part Numbering for Type and Length of Lead.

■ Equivalent Circuit

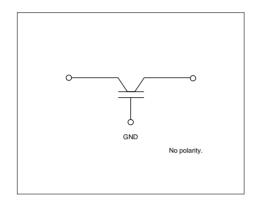

■ Insertion Loss Characteristics (Typical)

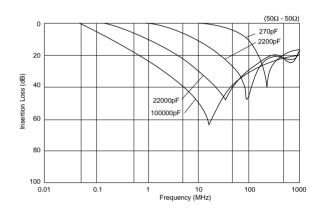


Built-in Ferrite Beads DSS9 Series


| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------|------------------------|----------------------|-------------------------------------|
| DSS9NC52A220 | 22 +20%,-20% | 100 | 7 | -25 to +85 |
| DSS9NC52A470 | 47 +20%,-20% | 100 | 7 | -25 to +85 |
| DSS9NC52A101 | 100 +20%,-20% | 100 | 7 | -25 to +85 |
| DSS9NC52A271 | 270 +20%,-20% | 100 | 7 | -25 to +85 |
| DSS9NC52A222 | 2200 +20%,-20% | 100 | 7 | -25 to +85 |
| DSS9NP32A222 | 2200 +20%,-20% | 100 | 7 | -25 to +85 |
| DSS9NC51H223 | 22000 +50%,-20% | 50 | 7 | -25 to +85 |
| DSS9NT31H223 | 22000 +50%,-20% | 50 | 7 | -25 to +85 |

Rated current is 6A for taping type and its lead diameter is phi 0.6mm. DSS9NP32A222/DSS9NT31H223 are low distortion types for audio IF circuits.

Please refer to Part Numbering for Type and Length of Lead.

■ Equivalent Circuit

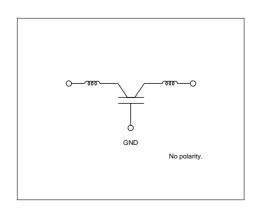

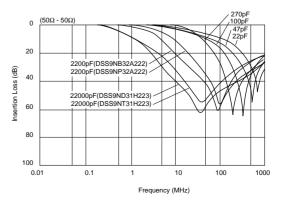


With Ferrite Beads DST9 Series


| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------|------------------------|----------------------|----------------------------------|
| DST9NC52A271 | 270 +20%,-20% | 100 | 7 | -25 to +85 |
| DST9NC52A222 | 2200 +20%,-20% | 100 | 7 | -25 to +85 |
| DST9NC51H223 | 22000 +50%,-20% | 50 | 7 | -25 to +85 |

Rated current is 6A for taping type and its lead diameter is phi 0.6mm.

Please refer to Part Numbering for Type and Length of Lead.

■ Equivalent Circuit

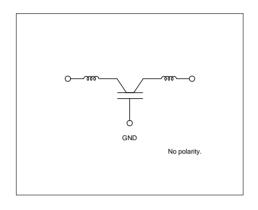

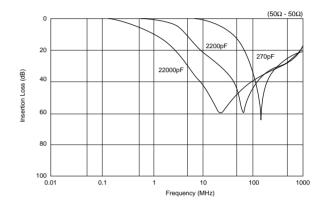

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Disc Type EMIFIL® Heavy-duty Type DSN9H/DSS9H/DST9H Series


■ Features

DS_9H is a basic type EMI suppression filter which can obtain high insertion loss in a wide frequency range. Its three terminal structure enables nice high frequency performance. High rated voltage of 250Vdc and wide operating temperature range from -40 degree C to 105 degree C are suitable for high reliability circuits.


■ Supplement

Diameter of lead is 0.6mm for taping type. Taping type is three terminal in line arrangement.










- *1 Coating extending on leads does not exceed the tangent line
- Exposed electrode, if any, is covered by solder, etc.

 *2 There should not be the exposure of the ferrite bead if a hole is in top of filter, the ferrite bead should not be exposed.






DSN9H Series

| Part Number | Capacitance (pF) | Rated Voltage (Vdc) | Rated Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------|------------------------|----------------------|-------------------------------------|
| DSN9HB32E220 | 22 +20%,-20% | 250 | 6 | -40 to +105 |
| DSN9HB32E101 | 100 +20%,-20% | 250 | 6 | -40 to +105 |
| DSN9HB32E271 | 270 +20%,-20% | 250 | 6 | -40 to +105 |
| DSN9HB32E222 | 2200 +20%,-20% | 250 | 6 | -40 to +105 |


Please refer to Part Numbering for Type and Length of Lead.

Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

■ Equivalent Circuit

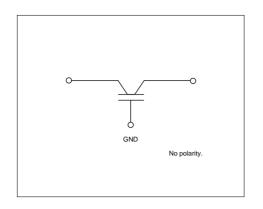

■ Insertion Loss Characteristics (Typical)

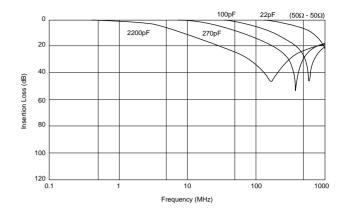


Built-in Ferrite Beads DSS9H Series


| Part Number | Capacitance (pF) | Rated Voltage Rated Current (Vdc) (A) | | Operating Temperature Range (°C) | |
|--------------|---------------------|---------------------------------------|---|----------------------------------|--|
| DSS9HB32E220 | 22 +20%,-20% | 250 | 6 | -40 to +105 | |
| DSS9HB32E101 | 100 +20%,-20% | 250 | 6 | -40 to +105 | |
| DSS9HB32E271 | 270 +20%,-20% | 250 | 6 | -40 to +105 | |
| DSS9HB32E222 | 2200 +20%,-20% | 250 | 6 | -40 to +105 | |

Please refer to Part Numbering for Type and Length of Lead.

■ Equivalent Circuit

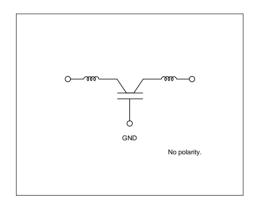

■ Insertion Loss Characteristics (Typical)

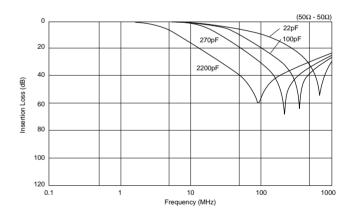


With Ferrite Beads DST9H Series


| Part Number | mber Capacitance (pF) | | Rated Current (A) | Operating Temperature Range (°C) | |
|--------------|-----------------------|-----|----------------------|----------------------------------|--|
| DST9HB32E220 | 22 +20%,-20% | 250 | 6 | -40 to +105 | |
| DST9HB32E101 | 100 +20%,-20% | 250 | 6 | -40 to +105 | |
| DST9HB32E271 | 270 +20%,-20% | 250 | 6 | -40 to +105 | |
| DST9HB32E222 | 2200 +20%,-20% | 250 | 6 | -40 to +105 | |

Please refer to Part Numbering for Type and Length of Lead.

■ Equivalent Circuit

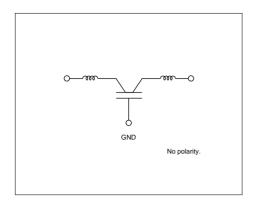

■ Insertion Loss Characteristics (Typical)

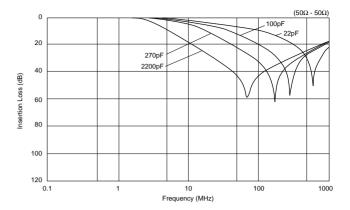

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Lead Type EMIGUARD® (EMIFIL® with Varistor Function) Part Numbering

Lead Type EMIGUARD® (EMIFIL® with Varistor Function)

VF S 6 V D8 1E 221 T51 B (Part Number)

Product ID

| Product ID | |
|------------|---------------------|
| VF | EMIGUARD® Lead Type |

2Structure

| Code | Structure |
|------|-----------------------------|
| s | Built-in Ferrite Beads Type |
| R | with Resistance |

Style

| Code | Style | | | | |
|------|-------------------------------|--|--|--|--|
| 3 | | | | | |
| 6 | Size is expressed by a figure | | | | |
| 9 | | | | | |

4 Features

| Code | Features | |
|------|------------------------|--|
| V | with Varistor Function | |

5Temperature Characteristics

| Code | Capacitance Change | | |
|------|---|--|--|
| D8 | +20/-30% (Temperature Range : -40°C~+105°C) | | |
| D3 | +20/-30% (Temperature Range : -25°C~+85°C) | | |

6 Rated Voltage

| Code | Rated Voltage |
|------|---------------|
| 1E | 25V |
| 1B | 12V |

Capacitance

Expressed by three figures. The unit is in pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

8Lead Type/9Packaging

| Code | Lead Type | Lead Length* Packaging | | Series |
|------|-----------|------------------------|---------------------|-----------|
| T51B | | | Bulk | VFR3/VFS6 |
| U31A | Incrimp | 18.5+/-1.0mm | Ammo Pack | VFK3/VF30 |
| Q55B | | 25.0mm min. | Bulk | VFS9 |
| Q91J | Straight | 20.0+/-1.0mm | | |
| Q92J | Sualyni | 16.5+/-1.0mm | Paper Reel (ø320mm) | VF39 |
| Q93J | | 18.5+/-1.0mm | | |

^{*}Lead Distance between Reference and Bottom Planes except Bulk.

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Lead Type EMIGUARD® (EMIFIL® with Varistor Function) VFR3V/VFS6V/VFS9V Series


for Semiconductor Protection VFR3V Series

■ Features

VFR3V series is designed for ESD surge protection of IC. It efficiently absorbs ESD surges rushed into IC's I/O terminal.

Applications


Elimination of noise and protection of semiconductors in office equipment, including computers and peripheral equipment, copy machines, and communication terminals.

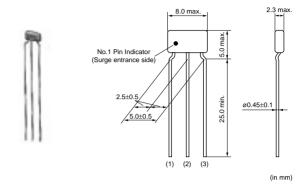

| Part Number | Rated Voltage (Vdc) | Varistor Voltage (Vdc) | Capacitance (pF) | Rated Current (mA) | Peak Pulse Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------------|---------------------------|---------------------|--------------------------|------------------------------|--|
| VFR3VD31E131 | 25 | 50 +20%,-20% | 130 +20%,-20% | 20 | 30 | -25 to 85 |

Please refer to Part Numbering for Type and Length of Lead.

■ Insertion Loss Characteristics

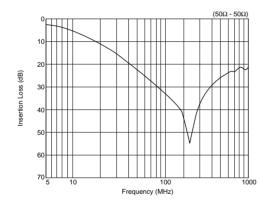

for Signal-Line VFS6V Series


■ Features

VFS6V series is designed for surge protection of signal line. It protects electric circuit from surges such as static electricity and suppresses EMI noise. Built-in ferrite bead gives excellent EMI suppression.

■ Applications

Elimination of noise and protection of electric circuits in office equipment, including computers and peripheral equipment, copy machines, and communication terminals.






*1 There may be a hole on the top of ferrite beads,

which cause no characteristics deterioration.
*2 Bottom of the ferrite beads may not be level with each other.

| Part Number | Rated Voltage (Vdc) | Varistor Voltage (Vdc) | Capacitance (pF) | Rated Current (A) | Peak Pulse Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------------|---------------------------|---------------------|-------------------------|------------------------------|--|
| VFS6VD81E221 | 25 | 50 +20%,-20% | 220 +20%,-20% | 6 | 100 | -40 to 105 |

Please refer to Part Numbering for Type and Length of Lead.

■ Insertion Loss Characteristics

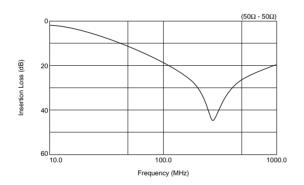

7.5 max

for Large-Current VFS9V Series


■ Features

VFS9V series is designed for surge protection of the power supply. It protects electric circuits from surge such as static electricity and suppresses EMI noise. Its large capacitance value enables high insertion loss for EMI noise.

■ Applications

For circuit protection and noise suppression in electronics equipment such as computers and DC motors, and in electronics systems installed in cars such as car audio equipment and engine controllers.





12.0 max

- *1 Coating extending on leads does not exceed the tangent line.

 Exposed electrode, if any, is covered by solder, etc.

 *2 There should not be the exposure of the ferrite bead if a hole
- is in top of filter, the ferrite bead should not be exposed

■ Supplement

Diameter of lead is 0.6mm for taping type.

Taping type is three terminal in line arrangement.


| Part Number | Rated Voltage (Vdc) | Varistor Voltage (Vdc) | Capacitance (pF) | Rated Current (A) | Operating Temperature Range (°C) |
|--------------|---------------------------|---------------------------|---------------------|-------------------------|--|
| VFS9VD31B223 | 12 | 22 +20%,-20% | 22000 +50%,-20% | 7 | -40 to 100 |

Rated current is 6A for taping type. Rated current is 7A for bulk type and 6A for taping type.


Rated current of taping type is 6A because diameter of lead is 0.6mm and its lead layout is in-line type.

Please refer to Part Numbering for Type and Length of Lead.

■ Insertion Loss Characteristics

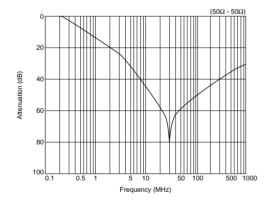


■ Voltage-Current Characteristics

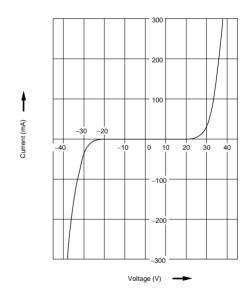


150


Noise Suppression Effect of VFR/VFS Series


- ■Example of IC Protection (VFR3V)
- Testing Method
- 1. Put ESD surge to IC (7404 family) input terminal with ESD simulator based on IEC 801-2.
- 2. Check IC's operation.
- 3. If IC's operation is normal, increase ESD voltage in 1kV
- 4. Continue above steps 1 to 3 till IC's operation becomes abnormal.
- Result

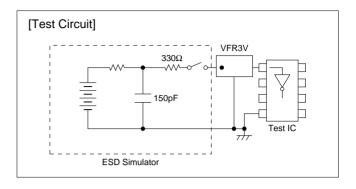

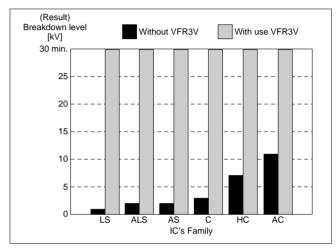

■Example of EMI Suppression Effect

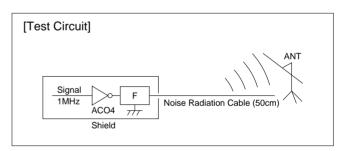

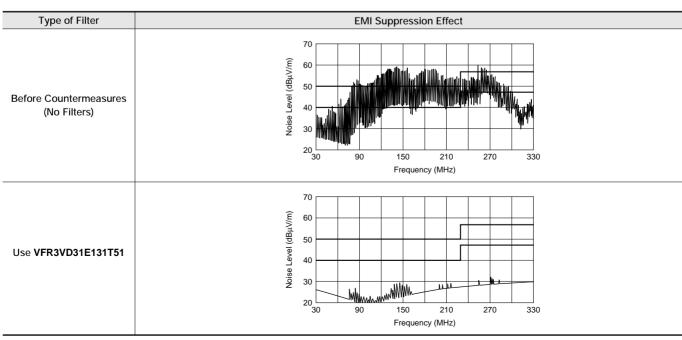



Noise Suppression Effect of VFR/VFS Series

■Features (VFS9V)


| Items | Test methods | Rated values | |
|-----------------------------|---|---|--|
| Overload | 1.4 times the varistor voltage (V ₁) is applied for 5 minutes at room temperature. | | |
| Surge Test (1) | At room temperature. Surges are applied are 10 ⁵ times every 2 seconds. Then after 1 or 2 hours, the sample is measured. | Items Specifications Rated Capacitance Change Within±15% | |
| Surge Test (2) | At room temperature. Capacitor "C" is charged with 70V, then discharged to apply the voltage to the sample. Tested once (resuming JASO A-1). | Insulation Resistance 500kΩ min. Rated of Change in Varistor Voltage V₁* Voltage Rate 1.30 max. | |
| High Temperature Load | At a temperature of 85±3°C. The varistor voltage V ₁ is continuously applied to the sample for 1000 to 1024 hours. Then it is left at room temperature, for 4 to 24 hours before measuring. | *V1 : Voltage when 1mA is applied | |

■Pulse-Voltage Breakdown Characteristic (VFS9V) VFS9V EMIGUARD® use a self healing varistor- capacitor, so that it can be used under a 500 to 600V surge which would break conventional disk type EMI filters. As shown in figure below EMIGUARD® withstands 2000V impulses applied 1000 times.

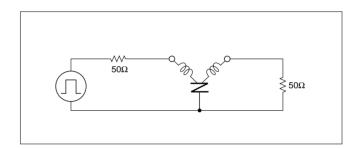

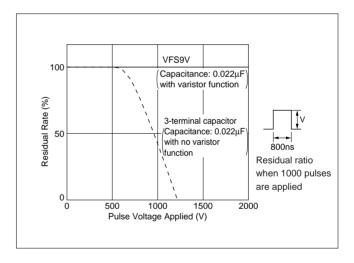

■Temperature Characteristics of Varistor Voltage-Insulation Resistance (VFS9V)

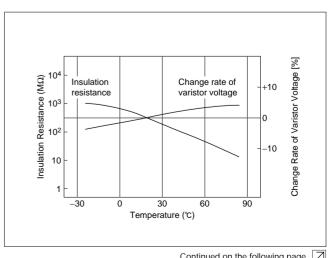

Continued on the following page.



Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Noise Suppression Effect of VFR/VFS Series

Continued from the preceding page.

■Noise Absorption Effect of EMIGUARD® (VFS9V)

| Type of Filter | EMI Suppression Effect | Description |
|-------------------|--|---|
| without EMIGUARD® | i : 200V/div : 10ns/div 90 80 20 10 0% | Waveform when EMIGUARD® is not used. (Surge from a noise simulator) |
| with EMIGUARD® | 1 : 200V/div : 10ms/div 90 80 20 10 0% | Waveform after the noise passed through EMIGUARD [®] . Little noise is recorded. |

■Comparative Data (VFS9V)

Absorption of quick-rising, high-frequency noise (10ns/div, 100V/div)

| . Absorption of quick-rising, high-frequency noise (10ns/div, 100V/div) | | |
|---|------------------------------------|--|
| Type of Filter | EMI Suppression Effect | Description |
| without Filters | 50ns | |
| Conventional varistor | 100 90 80 80 70 60% | As with the two terminal capacitor |
| Two terminal capacitor (with varistor function) | 100 80 80 6% | The two terminal capacitor is influenced by lead line inductance, leaving behind some of the rising and falling edges. The residual noise can cause the system to malfunction. |
| VFS9V | 100 90 90 20 0% | The three terminal structure eliminates most of the lead line inductance. This allows VFS9V to completely absorb the rising and falling edges of the applied pulses. |

Continued on the following page.





Noise Suppression Effect of VFR/VFS Series

Continued from the preceding page.

2. Absorption of wide-pulse noise (50ns/div. 200V/div)

| Type of Filter | EMI Suppression Effect | Description |
|--|---|--|
| without Filters | 200ns | |
| Two terminal capacitor | 100 90 80 20 10 0% | In capacitors the voltage of the residual surge (1300V) is higher than that of the above example. The wave height is almost the same as the original. |
| Three terminal capacitor (with ferrite bead) | 100 90 80 20 10 0% | Conventional EMI filters do not work for wide-pulse noise because capacitors are saturated. In this example, the residual 1200V surge can cause the system to breakdown. |
| VFS9V | 100 90 80 80 20 10 0% | Bypassing the high voltage to the ground, voltage can be suppressed. |

154

Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Common Mode Choke Coils Part Numbering

Common Mode Choke Coils

(Part Number)

PL | T | 09H | N | 200 | 3R0 | P | 1

Product ID

| Product ID | |
|------------|-------------------------|
| PL | Common Mode Choke Coils |

2Туре

| Code | Туре |
|------|---------|
| T | DC Type |

3Applications

| Code | Applications | |
|------|---------------------------------|--|
| 09H | for DC Line High-frequency Type | |

4 Features

| Code | Features |
|------|-------------|
| N | General Use |

6Inductance

Expressed by three figures. The unit is micro-henry (μH). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

6Rated Current

Expressed by three-digit alphanumerics. The unit is in amperes (A). A decimal point is expressed by the capital letter " ${\bf R}$ ". In this case, all figures are significant digits.

Winding Mode

| Code | Winding Mode |
|------|----------------------|
| P | Aligned Winding Type |

8 Lead Dimensions

| Code | Lead Dimensions |
|------|-----------------|
| 1 | 5mm |

Packaging

| Code | Packaging | Series |
|------|-----------|------------|
| В | Bulk | All series |

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Common Mode Choke Coils (for DC Line) PLT09H Series


PLT09H series is a common mode choke coil for DC lines. It is effective against the common mode noise that can cause radiative noise in power supply lines and interface lines. The additional normal mode inductance enables high suppression effect to radiation noise.

■ Features

- This is a wide frequency range type, applicable in applications ranging from a few MHz to several 100MHz.
- 2. It features a low-profile design.

■ Applications


- 1. Noise suppression of SW power supply, DC-DC converter
- 2. DC power lines in AC adapter of Portable equipment

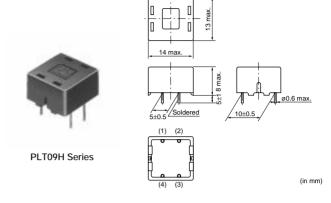


| Part Number | Common Mode Inductance (min.) Rated Current (μΗ) (A) | | Rated Voltage (Vdc) | Withstand Voltage (Vdc) | |
|-----------------|--|---|------------------------|----------------------------|--|
| PLT09HN2003R0P1 | 20 | 3 | 50 | 125 | |

Operating Temperature Range: -40°C to 85°C

■ Equivalent Circuit

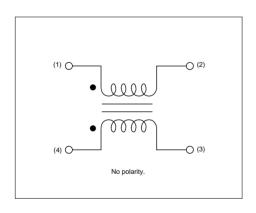

■ Insertion Loss Characteristics (Typical)

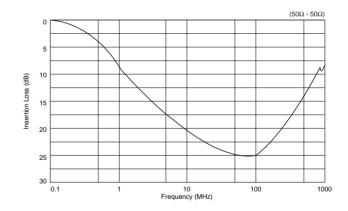

156

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)



Microwave Absorbers Part Numbering

Microwave Absorber

EA | 1026 | A | 160 | M | 200 | 200 (Part Number)

Product ID

| Product ID | |
|------------|--------------------|
| EA | Microwave Absorber |

2Sheet Type

| Code | Sheet Type |
|------|---|
| 10□□ | Iron carbonyl type (UL certified type/non Halogen type) |
| 2070 | Metal Flake Powder (non Halogen type) |
| 2100 | Metal Flake Powder (UL certified type) |
| 3008 | Magnetic material (UL certified type/non Halogen type) |

3Adhesive Tape Type

| Code Adhesive Tape Type | | | | |
|-------------------------|--|--|--|--|
| Α | Standard tape type (non Halogen type) | | | |
| В | Thin Adhesive tape type (non Halogen type) | | | |
| L | No tape type | | | |
| U | UL certified type (non Halogen type) | | | |

4Sheet Thickness

Expressed by 3 digits including the second decimal place in mm.

| Ex.) | Code | Sheet Thickness |
|------|------|-----------------|
| | 020 | 0.20mm |

5Unit of Dimension

One capital lettler expresses Unit of Dimension (6) and Dimensions Length (7).

| Code | Unit of Dimension |
|------|-------------------|
| M | in mm (Standard) |
| С | in cm (Standard) |

Standard shape is a rectangle.

Please contact us for other shapes.

6 Dimension (Length)

Expressed by 3 digits including the first decimal place.

7 Dimension (Width)

Expressed by 3 digits including the first decimal place.

| Ex.) | Code | Dimension (Length X Width) | | | |
|------|---------|----------------------------|--|--|--|
| | M300150 | 30.0×15.0 mm | | | |
| | C150100 | 00 15.0×10.0 cm | | | |

On-Board Type (DC) EMI Suppression Filters (EMIFIL®)




Microwave Absorbers EA10/20/21/30 Series

EA10 Series

When inquiring, please contact us with size code, refering to "Part Numbering".

■ Features


- 1. Excellent elasticity and durability with silicon rubber
- 2. Suitable for prevention of abnormal oscillation in high frequency modules, suppression of spurious spectra and prevention of interference between circuits





| Part Number | Applicable Frequency (Typ.) | Thickness (Typ.) (mm) | Flame Resistance | Halogen | Operating Temperature Range | |
|-------------|-----------------------------|--------------------------|------------------|--------------|-----------------------------|--|
| EA1026A100 | 20.0GHz | 1.0 | UL94V-0 | Halogen Free | -40 to +80°C | |
| EA1026A160 | 11.5GHz | 1.6 | UL94V-0 | Halogen Free | -40 to +80°C | |
| EA1026A180 | 10.0GHz | 1.8 | UL94V-0 | Halogen Free | -40 to +80°C | |
| EA1046A180 | 5.8GHz | 1.8 | UL94V-0 | Halogen Free | -40 to +80°C | |
| EA1075A270 | 2.5GHz | 2.7 | UL94V-0 | Halogen Free | -40 to +80°C | |

■ Reflection Loss

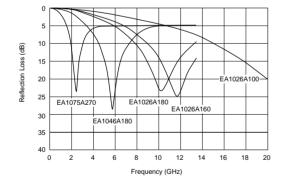

158

EA20/21 Series

When inquiring, please contact us with size code, refering to "Part Numbering".

■ Features


- 1. Magnetically-shielded high-micro and high-loss characteristics can suppress noise in a wide frequency band for digital equipment.
- 2. Thin (0.2mm-1.0mm) and flexible sheet makes easy handling in assembly process.
- 3. Holds easily in equipment with adhesive tape
- 4. EA20xx series: Non Halogen type

EA21xx series: UL94V-0 certified material is used.



| Part Number | Applicable Frequency (Typ.) | Thickness (Typ.) (mm) | Flame Resistance | Halogen | Operating Temperature Range | |
|-------------|-----------------------------|--------------------------|------------------|--------------|-----------------------------|--|
| EA2070A020 | 0.1 to 3.0GHz | 0.20 | - | Halogen Free | -40 to +120°C | |
| EA2070A050 | 0.1 to 3.0GHz | 0.50 | - | Halogen Free | -40 to +120°C | |
| EA2070A100 | 0.1 to 3.0GHz | 1.00 | - | Halogen Free | -40 to +120°C | |
| EA2070B005 | 0.1 to 3.0GHz | 0.05 | - | Halogen Free | -40 to +120°C | |
| EA2070B010 | 0.1 to 3.0GHz | 0.10 | - | Halogen Free | -40 to +120°C | |
| EA2070B013 | 0.1 to 3.0GHz | 0.13 | - | Halogen Free | -40 to +120°C | |
| EA2070B020 | 0.1 to 3.0GHz | 0.20 | - | Halogen Free | -40 to +120°C | |
| EA2070B050 | 0.1 to 3.0GHz | 0.50 | - | Halogen Free | -40 to +120°C | |
| EA2100A020 | 0.1 to 3.0GHz | 0.20 | UL94V-0 | - | -40 to +120°C | |
| EA2100A050 | 0.1 to 3.0GHz | 0.50 | UL94V-0 | - | -40 to +120°C | |
| EA2100A100 | 0.1 to 3.0GHz | 1.00 | UL94V-0 | - | -40 to +120°C | |
| EA2100B020 | 0.1 to 3.0GHz | 0.20 | UL94V-0 | - | -40 to +120°C | |
| EA2100B050 | 0.1 to 3.0GHz | 0.50 | UL94V-0 | - | -40 to +120°C | |
| EA2100B100 | 0.1 to 3.0GHz | 1.00 | UL94V-0 | - | -40 to +120°C | |

■ Magnetic Permeability-Reluctance (Typical)

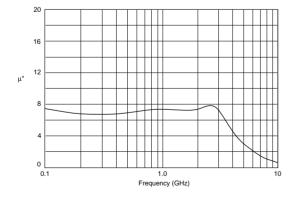

EA30 Series

When inquiring, please contact us with size code, refering to "Part Numbering".


■ Features

- 1. EMC Absorber magnetically shields and suppresses noise of digital equipment.
- 2. Flexible sheet, easy handling in assembly process.
- 3. Holds easily in equipment with adhesive tape.
- 4. Halogen free and UL94V-0 certified material are used.



| Part Number | Applicable Frequency (Typ.) | Thickness (Typ.) (mm) | Flame Resistance | Halogen | Operating Temperature Range | |
|-------------|-----------------------------|--------------------------|------------------|--------------|-----------------------------|--|
| EA3008U025 | 0.1 to 3.0GHz | 0.25 | UL94V-0 | Halogen Free | -40 to +120°C | |
| EA3008U035 | 0.1 to 3.0GHz | 0.35 | UL94V-0 | Halogen Free | -40 to +120°C | |
| EA3008U050 | 0.1 to 3.0GHz | 0.50 | UL94V-0 | Halogen Free | -40 to +120°C | |
| EA3008U100 | 0.1 to 3.0GHz | 1.00 | UL94V-0 | Halogen Free | -40 to +120°C | |
| EA3008U250 | 0.1 to 3.0GHz | 2.50 | UL94V-0 | Halogen Free | -40 to +120°C | |

■ Magnetic Permeability-Reluctance (Typical)

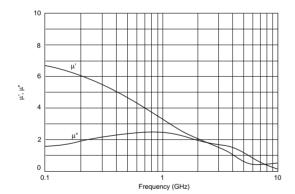

160

Chip EMIFIL® **(1)** Caution/Notice

■ ①Caution (Rating)

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.

■ ①Caution (Soldering and Mounting)

1. Self-heating

Please provide special attention when mounting chip "EMIFIL" (BLM_P, NFM_P) series in close proximity to other products that radiate heat.

The heat generated by other products may deteriorate the insulation resistance and cause excessive heat in this component.

2. Mounting Direction

Mount Chip Common Mode Choke Coils in right direction. Wrong direction, which is 90 degree rotated from right direction, causes not only open or short circuit but also flames or other serious trouble.

■ Notice (Storage and Operating Conditions)

<Operating Environment>

Do not use products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

<Storage and Handling requirements>

1. Storage Period

BLM (except BLM15E/15H series) /BLA/NFM55/DLP31S/ DLM11G/DLM2HG series should be used within 6 months, the other series should be used within 12 months.

Solderability should be checked if this period is exceeded.

right direction wrong direction

2. Storage Conditions

- (1) Storage temperature: -10 to 40 degree C Relative humidity: 30 to 70% Avoid sudden changes in temperature and humidity.
- (2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

■ Notice (Soldering and Mounting)

1. Washing

Failure and degradation of a product are caused by the washing method. When you wash in conditions that are not in mounting information, please contact Murata engineering.

2. Soldering

Reliability decreases with improper soldering methods. Please solder by the standard soldering conditions shown in mounting information.

■ Notice (Handling)

1. Resin coating

Using resin for coating/molding products may affect the products performance.

So please pay careful attention in selecting resin. Prior to use, please make the reliability evaluation with the product mounted in your application set.

3. Other

Noise suppression levels resulting from Murata's EMI suppression filters "EMIFIL" may vary, depending on the circuits and ICs used, type of noise, mounting pattern, lead wire length, mounting location, and other operating conditions. Be sure to check and confirm in advance the noise suppression effect of each filter, in actual circuits, etc. before applying the filter in a commercial-purpose equipment design.

2. Caution for use (DLW Series)

When you hold products with a tweezer, please hold by the sides. Sharp materials, such as a pair of tweezers, should not touch the winding portion to prevent breaking the wire. Mechanical shock should not be applied to the products mounted on the board to prevent breaking the core.



Lead Type EMIFIL® ACaution/Notice

■ △Caution (Rating)

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.

■ ①Caution (Soldering and Mounting)

Mounting holes should be designed as specified in these specifications. Other designs than shown in these specifications may cause cracks in ceramics which may lead to smoking or firing.

■ Notice (Storage and Operating Conditions)

<Operating Environment>

- 1. Do not use products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.
- Do not use products near water, oil or organic solvents. Avoid environment where dust or dirt may adhere to product.
- <Concerning "EMIGUARD">

VFR3V series is designed only to absorb electrostatic surges. Do not use this product to absorb large energy surges such as lighting or switching related surges.

- <Storage and Handling Requirements>
- Storage Period
 Used the products within 12 months after delivery.
 Solderability should be checked if this period is exceeded.

■ Notice (Soldering and Mounting)

1. Washing

Failure and degradation of a product are caused by the washing method. When you wash in conditions that are not in mounting information, please contact Murata engineering.

2. Soldering

Reliability decreases with improper soldering methods. Please solder by the standard soldering conditions shown in mounting information.

2. Storage Conditions

- Storage temperature: -10 to 40 degrees C Relative humidity: 30 to 70% Avoid sudden changes in temperature and humidity.
- (2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.
- (3) When restoring taping type (BL01RN1A1F1J), please attach the Spacer between flanges of reel. The Spacer is corrugated paper which is attached when shipping.

3. Other

Noise suppression levels resulting from Murata's EMI suppression filters "EMIFIL" may vary, depending on the circuits and ICs used, type of noise, mounting pattern, lead wire length, mounting location, and other operating conditions. Be sure to check and confirm in advance the noise suppression effect of each filter, in actual circuits, etc. before applying the filter in a commercial-purpose equipment design.




Microwave Absorbers Notice

■ Notice (Storage and Operating Conditions)

1. Adhesive Tape Stress

This product is designed for using the adhesive tape to hold itself to the object.

And please avoid causing mechanical stress by bending or variation of the object.

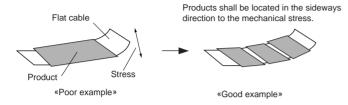

2. Cleaning

Avoid cleaning product.

3. Handling of the product

Adhesive tape must be clean to maintain the quality of tape. And please wipe off any dirt, dust and any kind of oil from the surface of the object before use.

4. Storage Conditions

(1) Storage period

Products which were inspected in Murata over 6 months ago should be examined and used. This can be confirmed with inspection No. marked on the container. Adhesiveness should be checked if this period is exceeded.

(2) Storage conditions

 Products should be stored in the warehouse on the following conditions.

Temperature: -10 to 40°C
Humidity: 30 to 70% relative humidity
No rapid change on temperature and humidity

· Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.



1. Standard Land Pattern Dimensions

NF series suppress noise by conducting the high-frequency noise element to ground. Therefore, to obtain maximum performance from these filters, the ground pattern should be made as large as possible during the PCB design stage. As shown below, one side of the PCB is used for chip mounting, and the other is used for grounding.


Small diameter feedthrough holes are then used to connect the grounds on each side of the PCB. This reduces the highfrequency impedance of the grounding and maximizes the filter's performance.



BLM03 BLM15 (Except BLM 15A_AN series)


BLM₁₈ BLM21 BLM31 BLM41

●Reflow and Flow **BLM Series**



| Туре | Soldering | а | b | С | |
|-------|------------------------------|---------|---------|-----|--|
| BLM03 | Reflow | 0.2-0.3 | 0.6-0.9 | 0.3 | |
| BLM15 | Reflow | 0.4 | 1.2-1.4 | 0.5 | |
| BLM18 | Flow (except 18G type) | 0.7 | 2.2-2.6 | 0.7 | |
| | Reflow | | 1.8-2.0 | | |
| BLM21 | Flow/ Reflow | 1.2 | 3.0-4.0 | 1.0 | |


• Except BLM03PG/15PG/18PG-SG/21PG. And BLM03/15/18G is specially adapted for reflow soldering.




| Туре | | Soldering | а | þ | С | Land pad thickness and dimension d | | |
|------------|----------|-----------------|---------|--------------------------------------|-----|------------------------------------|------|------|
| | (A) | | | | | 18μm | 35μm | 70μm |
| BLM03PG | 0.75-0.9 | Reflow | 0.2-0.3 | 0.6-0.9 | 0.3 | 0.3 | 0.3 | 0.3 |
| BLM15PG | 1 | Reflow | 0.4 | 1.2-1.4 | 0.5 | 0.5 | 0.5 | 0.5 |
| | 0.5-1.5 | | | | | 0.7 | 0.7 | 0.7 |
| BLM18PG | 2 | | | Flow 2.2-2.6 Reflow 1.8-2.0 | 0.7 | 1.2 | 0.7 | 0.7 |
| | 3 | | | | | 2.4 | 1.2 | 0.7 |
| | 1.5 | | 0.7 | | | 0.7 | 0.7 | 0.7 |
| BLM18SG | 2.5 | Flow/ Reflow | | | | 1.2 | 0.7 | 0.7 |
| | 3-4 | | | | | 2.4 | 1.2 | 0.7 |
| | 6 | | | | | 6.4 | 3.3 | 1.65 |
| | 1.5 | | 1.2 | 3.0-4.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| BLM21PG | 2 | | | | | 1.2 | 1.0 | 1.0 |
| BLIVIZ IFG | 3 | | | | | 2.4 | 1.2 | 1.0 |
| | 6 | | | | | 6.4 | 3.3 | 1.65 |
| | 1.5/2 | | | | | 1.2 | 1.2 | 1.2 |
| BLM31PG | 3 | | 2.0 | 4.2-5.2 | 4.0 | 2.4 | 1.2 | 1.2 |
| | 6 | | | | | 6.4 | 3.3 | 1.65 |
| | 1-2 | | | | 1.2 | 1.2 | 1.2 | 1.2 |
| BLM41PG | 3 | | 3.0 | 5.5-6.5 | | 2.4 | 1.2 | 1.2 |
| | 6 | | | | | 6.4 | 3.3 | 1.65 |

 $[\]bullet$ Do not apply narrower pattern than listed above to BLM $\Box\Box P/S.$ Narrow pattern can cause excessive heat or open circuit.

BLA2A BLA31



Reflow and Flow BLA31



• If there are high amounts of self-heating on pattern, the contact points of PCB and part may become damaged.


Continued on the following page.





Continued from the preceding page



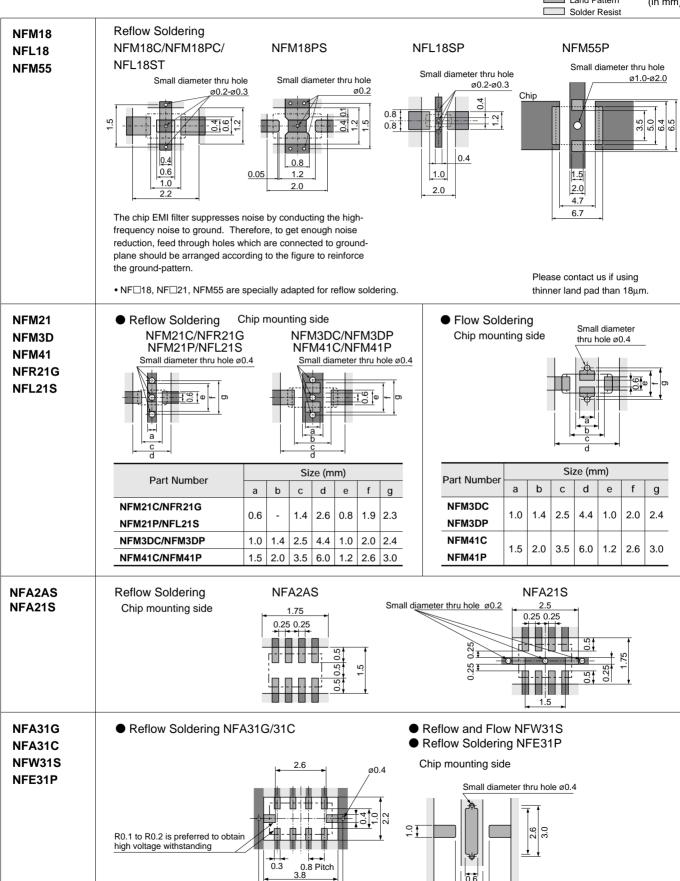

4.2




Continued from the preceding page



NFE61P NFE61H


Reflow Soldering

Chip mounting side




● Flow Soldering (Except NFE61HT332)


Chip mounting side




DLM11G **DLM2HG DLP0NS** DLP11S DLP2AD DLP31S DLP31D **DLW21S** DLW21H **DLW31S** DLW5AH **DLW5BS** DLW5BT


Reflow and Flow









Reflow Soldering **DLP0NS**








| | | | | * _* | |
|----|----|---|---|----------------|-------------|
| | | | | ຶບ | * |
| | | | | | t |
| | | | | - | ٦ |
| | | | | | |
| | *3 | | | | |
| | а | | | | |
| 1- | b | _ | ı | | |

| Series | а | b | С | d |
|----------|-----|-----|-----|-----|
| DLW21S/H | 0.8 | 2.6 | 0.4 | 1.2 |
| DLW31S | 1.6 | 3.7 | 0.4 | 1.6 |

DLW5AH/5BS/5BT

DLW21S/21H/31S

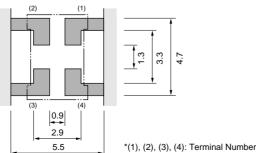


- * 1: If the pattern is made with wider than 1.2mm (DLW21) / 1.6mm (DLW31S) it may result in components turning around, because melting speed is different. In the worst case, short circuit between lines may occur.
- * 2: If the pattern is made with less than 0.4mm, in the worst case, short circuit between lines may occur due to spread of soldering paste or mount placing accuracy.
- * 3: If the pattern is made with wider than 0.8mm (DLW21) / 1.6mm (DLW31S), the bending strength will be reduced. Do not use gild pattern; excess soldering heat may dissolve metal of a copper wire.



EMIFIL® (Soldering and Mounting)

Continued from the preceding page



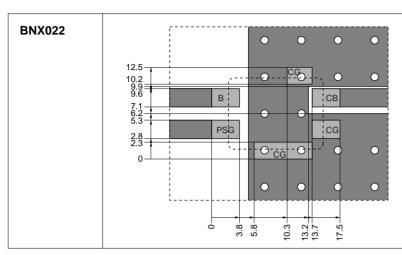


- (1) A double-sided print board (or multilayer board) as shown in the left figure is designed, and please apply a soldering Cu electrode with a product electrode to a "Land Pattern", apply resist to a "Land Pattern + Solder Resist" at Cu electrode.
- (2) Please drop CG on a ground electrode on the back layer (the same also in a multilayer case) by the through hole. And a surface grand electrode layer may also take a large area as much as possible.
- (3) It is recommended to use a double-sided printed circuit board with BNX mounting on one side and the ground pattern on the other in order to maximize filtering performance, multiple feed through holes are required to maximize the BNX's connection to ground.
- (4) The ground pattern should be designed to be as large as possible to achieve maximum filtering performance.
- 2. Solder Paste Printing and Adhesive Application When reflow soldering the chip EMI suppression filter, the printing must be conducted in accordance with the following cream solder printing conditions. If too much solder is applied, the chip will be prone to damage by mechanical and thermal stress from the PCB

Standard land dimensions should be used for resist and copper foil patterns.

When flow soldering the EMI suppression filter, apply the adhesive in accordance with the following conditions. If too much adhesive is applied, then it may overflow into the land or termination areas and yield poor solderability. In contrast, if insufficient adhesive is applied, or if the adhesive is not sufficiently hardened, then the chip may become detached during flow soldering process.

(in mm)

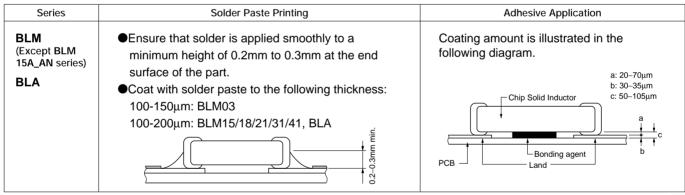


Continued on the following page. $\begin{tabular}{|c|c|c|c|}\hline \end{tabular}$



Continued from the preceding page

(in mm)

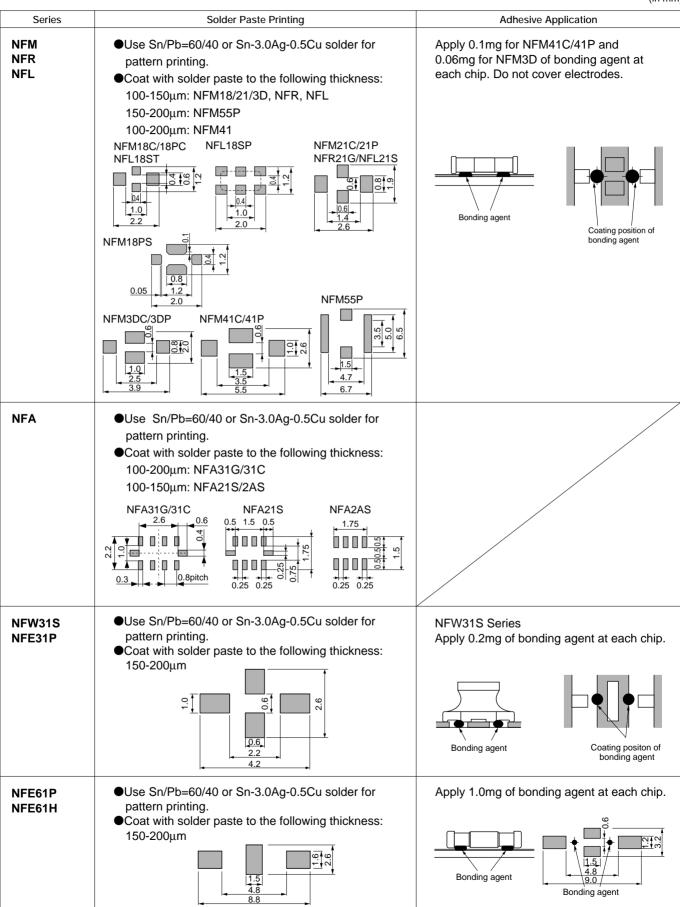


Continued on the following page. |



Continued from the preceding page

(in mm)

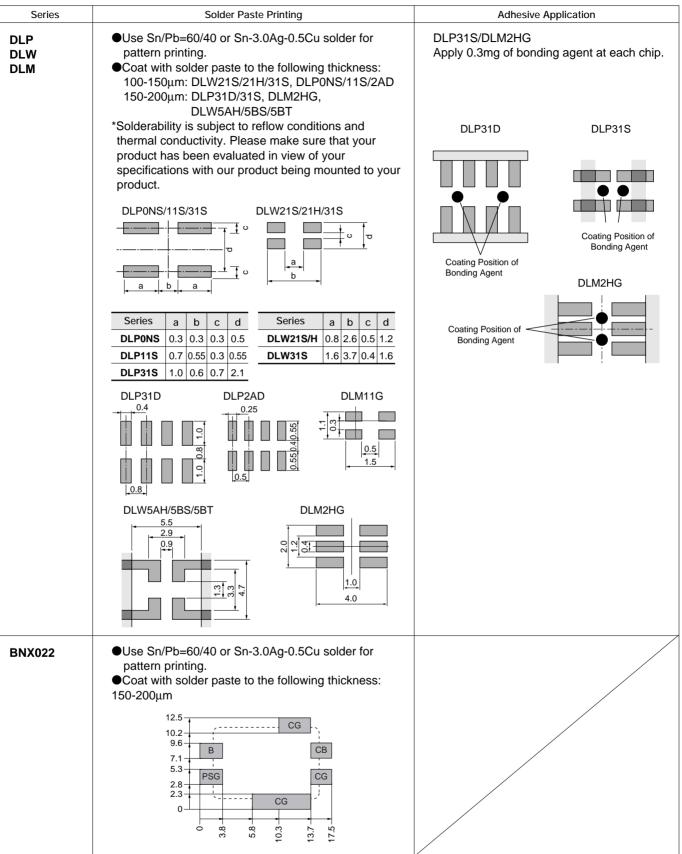

Continued on the following page.



Continued from the preceding page

3. Standard Soldering Conditions

(1) Soldering Methods

Use flow and reflow soldering methods only.

Use standard soldering conditions when soldering chip

EMI suppression filters chip varistor.

In cases where several different parts are soldered, each

having different soldering conditions, use those

conditions requiring the least heat and minimum time.

Solder: H60A H63A solder (JIS Z 3238)

In case of lead-free solder, use Sn-3.0Ag-0.5Cu

solder

Flux:

Use Rosin-based flux.

In case of DLW21/31 series, use Rosin-based flux with converting chlorine content 0.06 to 0.1wt%.

In case of using RA type solder, products shall be cleaned completely no residual flux.


- Do not use strong acidic flux (with chlorine content exceeding 0.20wt%)
- Do not use water-soluble flux.

For additional mounting methods, please contact Murata.

(2) Soldering profile

*Except NFE61HT332

•Flow Soldering profile (Eutectic solder, Sn-3.0Ag-0.5Cu solder)

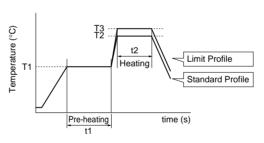

| | Dro h | Dro hooting | | andard Profile | е | Limit Profile | | |
|---|-------------|-------------|------------|----------------|------------------|---------------|------------|---------|
| Series | Pre-heating | | Hea | Heating | | Hea | ting | Cycle |
| | Temp. (T1) | Time. (t1) | Temp. (T2) | Time. (t2) | Cycle of flow | Temp. (T3) | Time. (t2) | of flow |
| BLM (Except BLM03/15/18G) BLA31 NFM3DC/3DP NFM41C/41P NFE61H*/61P DLM2HG DLP31D/31S | 150°C | 60s min. | 250°C | 4 to 6s | 2 times | 265±3°C | 5s max. | 2 times |
| NFW31S | 150°C | 60s min. | 250°C | 4 to 6s | 2 times | 265±3°C | 5s max. | 1 times |

Continued on the following page.








Continued from the preceding page


Reflow Soldering profile

(1) Soldering profile for Lead-free solder (Sn-3.0Ag-0.5Cu)

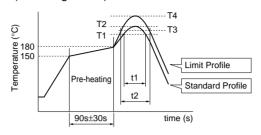

| | | Standar | d Profile | | Limit Profile | | | |
|---|------------|------------|---------------------|--------------------|---------------|------------|---------------------|-----------|
| Series | Hea | ting | Peak | Cycle of reflow | Hea | Heating | | Cycle |
| | Temp. (T1) | Time. (t1) | temperature (T2) | | Temp. (T3) | Time. (t2) | temperature (T4) | of reflow |
| BLM, BLA NFA, NFE NFL, NFM NFR, DLM DLP DLW21/31 | 220°C min. | 30 to 60s | 245±3°C | 2 times | 230°C min. | 60s max. | 260°C/10s | 2 times |
| DLW5A/5B | 220°C min. | 30 to 60s | 250±3°C | 2 times | 230°C min. | 60s max. | 260°C/10s | 2 times |
| NFW31S | 220°C min. | 30 to 60s | 245±3°C | 2 times | 230°C min. | 60s max. | 260°C/10s | 1 times |
| BNX022 | 220°C min. | 30 to 60s | 250±3°C | 2 times | 230°C min. | 60s max. | 260°C/10s | 2 times |

2 Soldering profile for Eutectic solder (Limit profile: refer to 1)

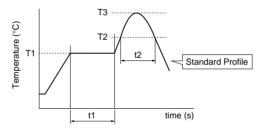

| | Dro h | ooting | Standard Profile | | | | |
|---|-------------|------------|------------------|------------|---------------------|-----------|--|
| Series | Pre-heating | | Hea | ting | Peak | Cycle | |
| | Temp. (T1) | Time. (t1) | Temp. (T2) | Time. (t2) | temperature (T3) | of reflow | |
| BLM, BLA NFA, NFE NFL, NFM NFR, NFW DLM, DLP DLW, BNX022 | 150°C | 60s min. | 183°C min. | 60s max. | 230°C | 2 times | |

(3) Reworking with Solder Iron

The following conditions must be strictly followed when using a soldering iron.

Pre-heating: 150°C 60s min.*1 *1 NFM55P: 100°C/60s+200°C/60s Soldering iron power output: 30W max.

Temperature of soldering iron tip / Soldering time: 350°C

max./3s max.*2

*2 NFE31PT152Z1E9: 280°C max./10s max. BNX022: 450°C max./5s max./2 times

Do not allow the tip of the soldering iron to directly contact the chip.

For additional methods of reworking with a soldering iron, please contact Murata engineering.

EMIFIL® (Soldering and Mounting)

Continued from the preceding page

4. Cleaning

Following conditions should be observed when cleaning chip EMI filter.

(1) Cleaning Temperature: 60°C max. (40°C max. for alcohol type cleaner)

(2) Ultrasonic

Output: 20W/liter max. Duration: 5 minutes max. Frequency: 28 to 40kHz


(3) Cleaning agent

The following list of cleaning agents have been tested on the individual components. Evaluation of final assembly should be completed prior to production.

5. Mounting of BLM15A_AN Series BLM15A_AN is series for wire bonding mounting.

(1) Die bonding mounting

(a) Dimension of standard metal mask

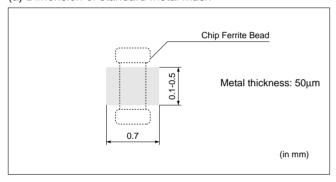

Do not clean DLW21S/31S/5AH/5BS/BNX022 series. In case of cleaning, please contact Murata engineering.

- (a) Alcohol cleaning agent Isopropyl alcohol (IPA)
- (b) Aqueous cleaning agent Pine Alpha ST-100S
- (4) Ensure that flux residue is completely removed. Component should be thoroughly dried after aqueous agent has been removed with deionized water.
- (5) Some products may become slightly whitened. However, product performance or usage is not affected. For additional cleaning methods, please contact Murata engineering.

(b) Die bonding agent

 Use adhesive for die bonding for which the curing temperature is 200°C or less.

(c) Notice

- Use a flat surface of substrate for bonding mounting. Slant mounting of product may affect the wire bonding.
- Adhesive for die bonding may affect the mounting reliability in wire bonding.


Make sure of the mounting reliability with the adhesive to be used in advance.



Lead Type EMIFIL® (Soldering and Mounting)

1. Mounting Hole

Mounting holes should be designed as specified below.

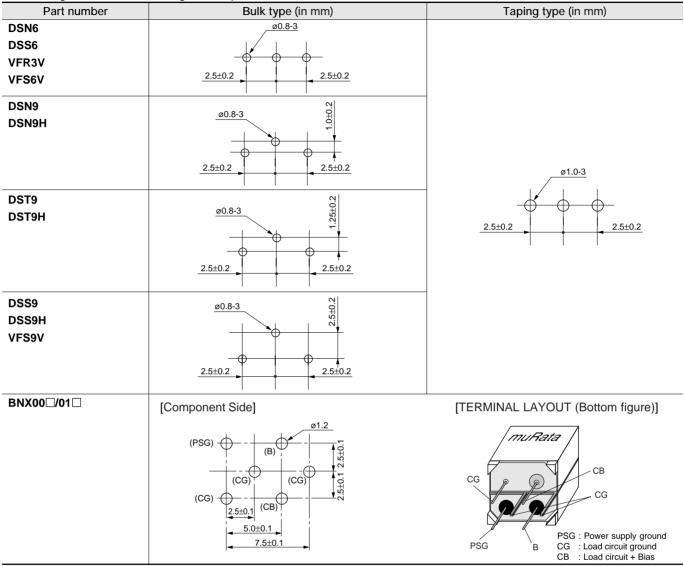

Lead Type EMIFIL® (Soldering and Mounting)

Continued from the preceding page.

2. Using The Block Type EMIFIL® Effectively

(1) How to use effectively

This product effectively prevents undesired radiation and external noise from going out / entering the circuit by grounding the high frequency components which cause noise problems. Therefore, grounding conditions may affect the performance of the filter and attention should be paid to the following for effective use.


- (a) Design maximized grounding area in the P.C. board. and grounding pattern for all the grounding terminals of the product to be connected. (Please follow the specified recommendations.)
- (b) Minimize the distance between ground of the P.C. board and the ground plate of the product. (Recommended to use through-hole connection between grounding area both of component side and bottom side.)
- (c) Insert the terminals into the holes on P.C. board completely.
- (d) Don't connect PSG terminal with CG terminal directly. (See the item 1. TERMINAL LAYOUT)

(2) Self-heating

Though this product has a large rated current, localized selfheating may be caused depending on soldering conditions. To avoid this, attention should be paid to the following:

- (a) Use P.C. board with our recommendation on hole diameter / land pattern dimensions, mentioned in the right hand drawing, especially for 4 terminals which pass current.
- (b) Solder the terminals to the P.C. board with soldercover area at least 90%. Otherwise, excess selfheating at connection between terminals and P.C. board may lead to smoke and / or fire of the product even when operating at rated current.
- (c) After installing this product in your product, please make sure of the self-heating with the rated current.

[P. C. BOARD PATTERNS] Use a bilateral P.C. board. Insert the BNX into the P.C.board until the root of the terminal is secured, then solder. (1) COMPONENT SIDE VIEW (2) BOTTOM VIEW Shield plate PSĢ В Copper foil pattern

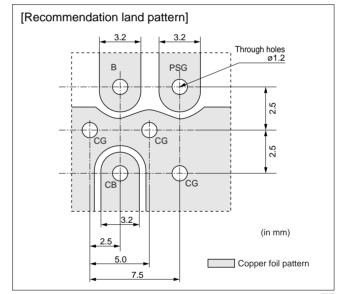

Continued on the following page.





Lead Type EMIFIL® (Soldering and Mounting)

- Continued from the preceding page.
- 3. Using EMIGUARD® effectively
- (1) Terminal (with mark) should be properly connected to the line of incoming electrostatic surge. (There is polarity.) Otherwise, no effect in ESD suppression can be expected (VFR3V).
- (2) Products should be used at rated voltage or less and rated current or less.
- (3) Products should not be applied for the absorption of surges which have large energy (ex. induced lightning surges, switching surges) because it is designed for the absorption of electrostatic surges (VFR3V).
- (4) Electrostatic test should be done on the following conditions (VFR3V).
 - $n \cdot [C/R \cdot V^2]^2 < 8.0 \times 10^5$
 - n: Times applied
 - C: Charging Capacitance (pF)
 - V: Testing Voltage (kV)
 - R: Charging Resistance (Ω)

4. Soldering

- (1) Solder: H60A, H63A solder (JIS Z 3238)
 In case of lead-free solder, use Sn-3.0Ag-0.5Cu solder.
- (2) Use Rosin-based flux. Do not use strong acidic flux with halide content exceeding 0.2wt% (chlorine conversion value).
- (3) Products and the leads should not be subjected to any mechanical stress during the soldering process, or while subjected to the equivalent high temperatures.
- (4) Standard flow soldering profile

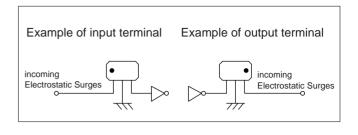

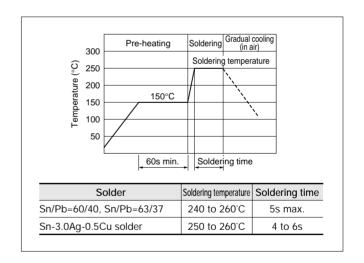

5. Cleaning Conditions

Do not clean VFR3V, PLT09H and VFS6V series.

Clean other parts in the following conditions.

- (1) Cleaning temperature should be limited to 60°C max. (40°C max for alcohol type cleaner.)
- (2) Ultrasonic cleaning should be complied with the following conditions, avoiding the resonance phenomenon at the mounted products and P.C.B.

Power: 20 W / I max. Frequency: 28 to 40kHz Time: 5 min. max.


- (3) Cleaner
 - (a) Alcohol type cleaner Isopropyl alcohol (IPA)

- (b) Aqueous agent (PLT series cannot be cleaned)
 PINE ALPHA ST-100S
- (4) There should be no residual flux or residual cleaner left after cleaning.
 - In the case of using aqueous agent, products should be dried completely after rinsing with de-ionized water in order to remove the cleaner.
- (5) The surface of products may become dirty after cleaning, but there is no deterioration on mechanical, electrical characteristics and reliability.
- (6) Other cleaning: Please contact us.



Chip EMIFIL® Packaging

■ Minimum Quantity and Dimensions of 8mm Width Paper / Embossed Tape

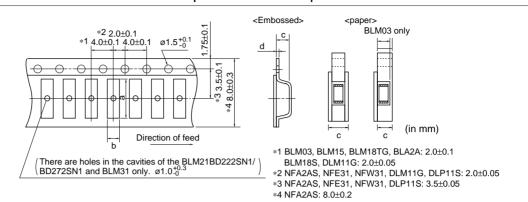

| | Cavity Size (in mm) | | | | Minimum Qty. (pcs.) | | | | |
|--|-------------------------|-------------|-----------|------|-------------------------|---------------|------------|---------------|-------|
| Part Number | Savity Size (III IIIII) | | | | ø180mm reel ø330mm reel | | | | Dulle |
| | а | b | С | d | Paper Tape | Embossed Tape | Paper Tape | Embossed Tape | Bulk |
| BLM03 | 0.70 | 0.40 | 0.55 max. | - | 15000 | - | 50000 | - | 1000 |
| BLM15 | 1.15 | 0.65 | 0.8 max. | - | 10000 | - | 50000 | - | 1000 |
| BLM18 | 1.85 | 1.05 | 1.1 max. | - | 4000 | - | 10000 | - | 1000 |
| BLM18EG_TN | 1 05 | 1.05 | 0.85 max. | _ | 4000 | _ | 10000 | _ | 1000 |
| BLM18EG_SN | 1.85 | 1.05 | 1.1 max. | - | 4000 | - | 10000 | - | 1000 |
| BLM18S | 1.85 | 1.05 | 0.90 max. | - | 10000 | | 30000 | - | 1000 |
| BLM18T | 1.85 | 1.05 | 0.90 max. | - | 10000 | - | - | - | 1000 |
| BLM21 | 2.25 | 1.45 | 1.1 max. | - | 4000 | - | 10000 | - | 1000 |
| BLM31 | 3.5 | 1.9 | 1.3 | 0.2 | - | 3000 | - | 10000 | 1000 |
| BLM21BD222SN1/272SN1 | 2.25 | 1.45 | 1.3 | 0.2 | - | 3000 | - | 10000 | 1000 |
| BLA2A | 2.2 | 1.2 | 0.8 max. | - | 10000 | - | 50000 | - | 1000 |
| BLA31 | 3.4 | 1.8 | 1.1 max. | - | 4000 | - | 10000 | - | 1000 |
| NFM18C/NFM18PC (Except 105R)/ NFM18PS | 1.85 | 1.05 | 0.9 max. | - | 4000 | - | - | - | 500 |
| NFM18PC105R | | | 1.1 max. | - | 4000 | - | - | - | 500 |
| NFL18SP | 4.05 | 4.05 | 0.9 max. | | | | | | |
| NFL18ST | 1.85 | 1.85 1.05 | 1.1 max. | - | 4000 | - | - | - | 1000 |
| NFL21SP | 2.3 | 1.55 | 1.1 max. | | | | | | |
| NFM21 | 2.3 | 1.55 | 1.1 max. | - | 4000 | - | - | - | 500 |
| NFM3DC/3DP | 3.4 | 1.4 | 0.85 | 0.2 | - | 4000 | - | - | 500 |
| NFA2AS | 2.2 | 1.2 | 0.75 | 0.25 | - | 4000 | - | - | 1000 |
| NFA21SL_45 | 2.30 | 1.55 | 0.7 | 0.25 | - | 4000 | - | - | 1000 |
| NFA21SL_48 | 2.25 | 1.45 | 1.05 | 0.25 | - | 4000 | - | - | 1000 |
| NFA31G/31C | 3.5 | 2.0 | 1.1 max. | - | 4000 | - | - | - | 100 |
| NFE31P | 3.6 | 1.8 | 1.85 | 0.2 | - | 2000 | - | 8000 | 500 |
| NFR21G | 2.3 | 1.55 | 0.7 | 0.25 | - | 4000 | - | - | 500 |
| NFW31S | 3.6 | 1.9 | 2.0 | 0.2 | - | 2000 | - | 7500 | - |
| DLM11G | 1.45 | 1.2 | 0.8 max. | - | 10000 | - | - | - | 1000 |
| DLM2HG | 2.75 | 2.25 | 1.3 | 0.25 | - | 3000 | - | - | 1000 |
| DLPONS | 1.05 | 0.85 | 0.55 | 0.25 | - | 5000 | - | - | 500 |
| DLP11S | 1.4 | 1.2 | 0.98 | 0.25 | - | 3000 | - | - | 500 |
| DLP2AD | 2.2 | 1.2 | 0.98 | 0.25 | - | 3000 | - | - | 500 |
| DLP31D/31S | 3.5 | 1.9 | 1.3 | 0.25 | - | 3000 | - | - | 500 |
| DLW21S | 2.25 | 1.45 | 1.4 | 0.3 | - | 2000 | - | - | 500 |
| DLW21H | 2.3 | 1.55 | 1.1 | 0.25 | - | 3000 | - | - | 500 |
| DLW31S | 3.6 | 2.0 | 2.1 | 0.3 | - | 2000 | - | - | 500 |

[•] Please contact us for BLM15/18 in bulk case.


Continued on the following page.




Chip EMIFIL® Packaging

Continued from the preceding page.


■ Minimum Quantity and Dimensions of 12mm Width Embossed Tape

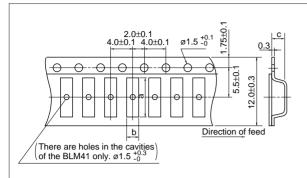

| Part Number | Ca | vity Si | ize | Minimum Qty. (pcs.) | | | |
|-------------|-----|---------|------|---------------------|-------------|------|--|
| Part Number | а | b | С | ø180mm reel | ø330mm reel | Bulk | |
| BLM41 | 4.8 | 1.9 | 1.75 | 2500 | 8000 | 1000 | |
| NFM41 | 4.8 | 1.8 | 1.1 | 4000 | - | 500 | |
| NFE61 | 7.2 | 1.9 | 1.75 | 2500 | 8000 | 500 | |

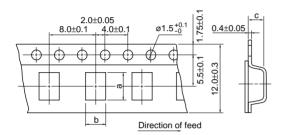


| Part Number | Ca | vity Si | ize | Minimum Qty. (pcs.) | | | |
|-------------|-----|---------|-----|---------------------|-------------|------|--|
| Part Number | а | b | С | ø180mm reel | ø330mm reel | Bulk | |
| DLW5AH | 5.4 | 4.1 | 4.4 | 400 | 1500 | 100 | |
| DLW5BS | 5.5 | 5.4 | 4.7 | 400 | 1500 | 100 | |
| DLW5BT | 5.5 | 5.5 | 2.7 | 700 | 2500 | 100 | |

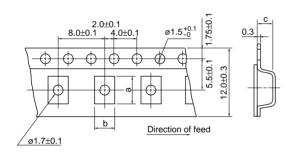

| Dort Number | Part Number Cavity Size | | | | Minimum Qty. (pcs.) | | | |
|-------------|-------------------------|-----|-----|-------------|---------------------|------|--|--|
| Part Number | a | b | С | ø180mm reel | ø330mm reel | Bulk | | |
| NFM55P | 6.0 | 5.3 | 2.5 | 500 | - | 100 | | |

(in mm)

■ Minimum Quantity and Dimensions of 24mm Width Embossed Tape

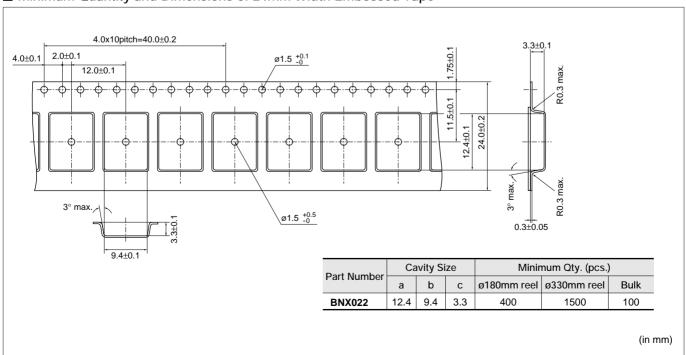


Ferrite Beads Inductors Packaging


■ Minimum Quantity (Pcs.)

| Series | Bulk Ammo Pack | | ø320mm Paper reel |
|--------|----------------|------|-------------------|
| BL01RN | 500 | 1000 | 2000 |
| BL02RN | 500 | 1500 | _ |
| BL03RN | 1000 | 2000 | _ |

■ Taping Dimensions

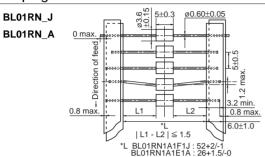


BL02RN1R3N1A

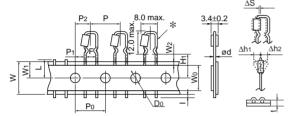


*There is an excess bond stick on the wire.

BL02RN2R3N1A

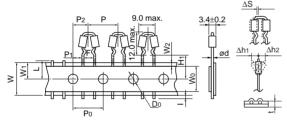


BL02RN1R2□1A

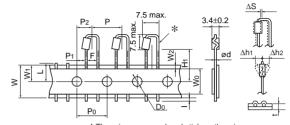


*There is an excess bond stick on the wire.

BL02RN2R1□1A

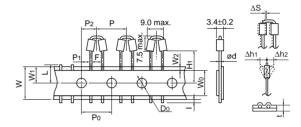

BL03RN2R1□1A

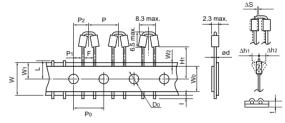

| Description | Symbol | Dimension (mm) | | Remarks |
|--|----------------|-------------------------------------|----------|---|
| Pitch of component | Р | 12.7 | | Product inclination ΔS determines tolerance |
| Pitch of sprocket hole | Po | 12.7±0.2 | | |
| Lead spacing | F | 5.0 ^{+0.8} _{-0.2} | | |
| Hole center to lead | P1 | 3.85±0.7 | | |
| Hole center to component center | P2 | 6.35±1.3 | | Tape deviation in feeding direction |
| Offset of bead | ΔS | ±1.0 | | Include the offset caused by lead bend |
| Carrier tape width | W | 18.0±0.5 | | |
| Position of sprocket hole | W1 | 9.0 +0 -0.5 | | Tape with deviation |
| Land Investigation of the Control of | | Lead Length Number : N | 16.5±0.5 | BL02, BL03 |
| Lead length between sprocket | H1 | Lead Length Number : Q | 20.0±0.5 | BL02RN1R2/2R1, BL03 |
| hole and forming position | | Lead Length Number : P | 18.5±0.5 | BL02, BL03 |
| Protruding length | I | +0.5 to -1.0 | | |
| Diameter of sprocket hole | D ₀ | ø4.0±0.1 | | |
| Lead Diameter | ød | ø0.60 | | |
| Total tape thickness | t | 0.7±0.2 | | Including bonding tape thickness |
| Deviation across tape, Deviation across tape rear | Δh1, Δh2 | 1.0 max. | | |
| Cutting position of failure | L | 11.0 +0 | | |
| Hold down tape width | Wo | 12.0±0.5 | | |
| Hold down tape position | W2 | 1.5±1.5 | | |

Disc Type EMIFIL® and EMIGUARD® Packaging


Minimum Quantity

| | Minimum Order Quantity (order in sets only) (Pcs.) | | | | | | |
|-------------------|--|----------------------|--|--|--|--|--|
| Part Number | Ammo Pack | ø320mm Paper reel | Bulk (Bag) | | | | |
| VFR3V Series | 2000 | _ | 250 | | | | |
| DS□6/VFS6V Series | 2000 | _ | 250 Q55/T51 500 Q54/Q56/T41 | | | | |
| DSN9/9H Series | 2000 | _ | 250 Q55 500 Q54/Q56 | | | | |
| DST9 Series | 1000 | _ | 200 Q55 250 Q50/Q52 | | | | |
| DSS9 Series | _ | 800 | 200 Q55 500 Q54/Q56 | | | | |
| VFS9V Series | _ | 800 | 200 | | | | |


■ Lead Type Code

| Lead Type code | | Lood longth (U) |
|----------------|--------------|-----------------|
| Straight Type | Incrimp Type | Lead length (H) |
| Q91 | - | 20.0±1.0mm |
| Q92 | U21 | 16.5±1.0mm |
| Q93 | U31 | 18.5±1.0mm |


■ Taping Dimensions

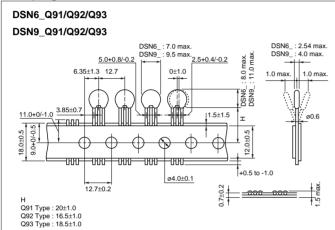


DSS6 Q91/Q92/Q93

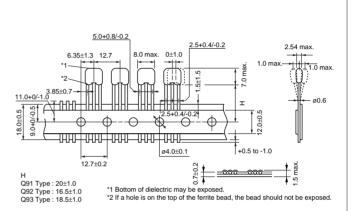


DST9_Q92/Q93

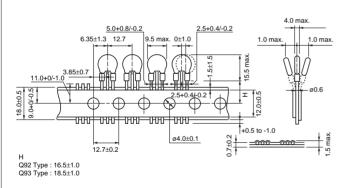


DSS6_U21/U31 VFS6V_U31

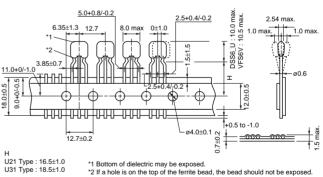

DSS9_Q91/Q92/Q93

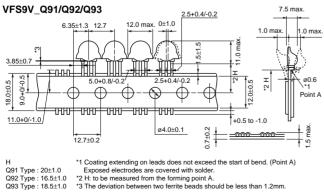

VFR3V_U31

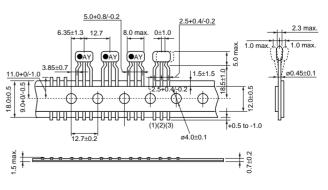

(in mm)





●EKEMBL03A (Chip Ferrite Beads 0201 Size)

| No. | Part Number | Quantity (pcs.) | Impedance typ. (at 100MHz, 20 degrees C) | Rated Current (mA) | DC Resistance (Ω) max. |
|-----|---------------|--------------------|---|--------------------|---------------------------|
| 1 | BLM03AG100SN1 | 10 | 10Ω (Typ.) | 500 | 0.1 |
| 2 | BLM03AG700SN1 | 10 | 70Ω (Typ.) | 200 | 0.5 |
| 3 | BLM03AG121SN1 | 10 | 120Ω±25% | 200 | 0.8 |
| 4 | BLM03AG241SN1 | 10 | 240Ω±25% | 100 | 1.0 |
| 5 | BLM03AG601SN1 | 10 | 600Ω±25% | 100 | 2.0 |
| 6 | BLM03BB100SN1 | 10 | 10Ω±25% | 300 | 0.4 |
| 7 | BLM03BB220SN1 | 10 | 22Ω±25% | 200 | 0.5 |
| 8 | BLM03BB470SN1 | 10 | 47Ω±25% | 200 | 0.7 |
| 9 | BLM03BB750SN1 | 10 | 75Ω±25% | 200 | 1.0 |
| 10 | BLM03BB121SN1 | 10 | 120Ω±25% | 100 | 1.5 |
| 11 | BLM03PG220SN1 | 10 | 22Ω±25% | 900 | 0.065 |
| 12 | BLM03PG330SN1 | 10 | 33Ω±25% | 750 | 0.090 |

●EKEMBL15F (Chip Ferrite Beads 0402 Size)

| No. | Part Number | Quantity (pcs.) | Impedance typ. (at 100MHz, 20 degrees C) | Rated Current (mA) | DC Resistance (Ω) max. |
|-----|---------------|--------------------|---|-----------------------|---------------------------|
| 1 | BLM15AG100SN1 | 10 | 10Ω (Typ.) | 1000 | 0.05 |
| 2 | BLM15AG700SN1 | 10 | 70Ω (Typ.) | 500 | 0.15 |
| 3 | BLM15AG121SN1 | 10 | 120Ω±25% | 500 | 0.25 |
| 4 | BLM15AG221SN1 | 10 | 220Ω±25% | 300 | 0.35 |
| 5 | BLM15AG601SN1 | 10 | 600Ω±25% | 300 | 0.60 |
| 6 | BLM15AG102SN1 | 10 | 1000Ω±25% | 200 | 1.00 |
| 7 | BLM15BB050SN1 | 10 | 5Ω±25% | 500 | 0.08 |
| 8 | BLM15BB100SN1 | 10 | 10Ω±25% | 300 | 0.10 |
| 9 | BLM15BB220SN1 | 10 | 22Ω±25% | 300 | 0.20 |
| 10 | BLM15BB470SN1 | 10 | 47Ω±25% | 300 | 0.35 |
| 11 | BLM15BB750SN1 | 10 | 75Ω±25% | 300 | 0.40 |
| 12 | BLM15BB121SN1 | 10 | 120Ω±25% | 300 | 0.55 |
| 13 | BLM15BB221SN1 | 10 | 220Ω±25% | 200 | 0.80 |
| 14 | BLM15BD750SN1 | 10 | 75Ω±25% | 300 | 0.20 |
| 15 | BLM15BD121SN1 | 10 | 120Ω±25% | 300 | 0.30 |
| 16 | BLM15BD221SN1 | 10 | 220Ω±25% | 300 | 0.40 |
| 17 | BLM15BD471SN1 | 10 | 470Ω±25% | 200 | 0.60 |
| 18 | BLM15BD601SN1 | 10 | 600Ω±25% | 200 | 0.65 |
| 19 | BLM15BD102SN1 | 10 | 1000Ω±25% | 200 | 0.90 |
| 20 | BLM15BD182SN1 | 10 | 1800Ω±25% | 100 | 1.40 |
| 21 | BLM15HD601SN1 | 10 | 600Ω±25% | 300 | 0.85 |
| 22 | BLM15HD102SN1 | 10 | 1000Ω±25% | 250 | 1.25 |
| 23 | BLM15HD182SN1 | 10 | 1800Ω±25% | 200 | 2.20 |

Continued from the preceding page.

| No. | Part Number | Quantity (pcs.) | Impedance typ. (at 100MHz, 20 degrees C) | Rated Current (mA) | DC Resistance (Ω) max. |
|-----|----------------------------|--------------------|---|-----------------------|---------------------------|
| 24 | 24 BLM15HG601SN1 10 | | 600Ω±25% | 300 | 0.70 |
| 25 | 25 BLM15HG102SN1 10 | | 1000Ω±25% | 250 | 1.10 |
| 26 | BLM15HB121SN1 10 | | 120Ω±25% | 300 | 0.70 |
| 27 | BLM15HB221SN1 | 10 | 220Ω±25% | 250 | 1.00 |
| 28 | BLM15EG121SN1 | 10 | 120Ω±25% | 1500 | 0.095 |
| 29 | BLM15EG221SN1 | 10 | 220Ω±25% | 700 | 0.28 |

●EKEMBL18D (Chip Ferrite Beads 0603 Size/ for Large-current P Type)

| No. | Part Number | Quantity (pcs.) | Impedance typ. (at 100MHz, 20 degrees C) | Rated Current (mA) | DC Resistance (Ω) max. |
|-----|---------------|-----------------|---|-----------------------|---------------------------|
| 1 | BLM18AG121SN1 | 10 | 120Ω±25% | 200 | 0.20 |
| 2 | BLM18AG221SN1 | 10 | 220Ω±25% | 200 | 0.30 |
| 3 | BLM18AG601SN1 | 10 | 600Ω±25% | 200 | 0.50 |
| 4 | BLM18AG102SN1 | 10 | 1000Ω±25% | 100 | 0.70 |
| 5 | BLM18BA050SN1 | 10 | 5Ω±25% | 500 | 0.20 |
| 6 | BLM18BA100SN1 | 10 | 10Ω±25% | 500 | 0.25 |
| 7 | BLM18BA470SN1 | 10 | 47Ω±25% | 300 | 0.55 |
| 8 | BLM18BA750SN1 | 10 | 75Ω±25% | 300 | 0.70 |
| 9 | BLM18BA121SN1 | 10 | 120Ω±25% | 200 | 0.90 |
| 10 | BLM18BB050SN1 | 10 | 5Ω±25% | 700 | 0.10 |
| 11 | BLM18BB100SN1 | 10 | 10Ω±25% | 500 | 0.15 |
| 12 | BLM18BB470SN1 | 10 | 47Ω±25% | 500 | 0.30 |
| 13 | BLM18BB750SN1 | 10 | 75Ω±25% | 200 | 0.35 |
| 14 | BLM18BB121SN1 | 10 | 120Ω±25% | 200 | 0.50 |
| 15 | BLM18BB221SN1 | 10 | 220Ω±25% | 200 | 0.65 |
| 16 | BLM18BB471SN1 | 10 | 470Ω±25% | 50 | 1.00 |
| 17 | BLM18BD121SN1 | 10 | 120Ω±25% | 200 | 0.40 |
| 18 | BLM18BD221SN1 | 10 | 220Ω±25% | 200 | 0.45 |
| 19 | BLM18BD471SN1 | 10 | 470Ω±25% | 200 | 0.55 |
| 20 | BLM18BD601SN1 | 10 | 600Ω±25% | 200 | 0.65 |
| 21 | BLM18BD102SN1 | 10 | 1000Ω±25% | 100 | 0.85 |
| 22 | BLM18BD182SN1 | 10 | 1800Ω±25% | 50 | 1.50 |
| 23 | BLM18BD252SN1 | 10 | 2500Ω±25% | 50 | 1.50 |
| 24 | BLM18HG471SN1 | 10 | 470Ω±25% | 200 | 0.85 |
| 25 | BLM18HG601SN1 | 10 | 600Ω±25% | 200 | 1.00 |
| 26 | BLM18HG102SN1 | 10 | 1000Ω±25% | 100 | 1.60 |
| 27 | BLM18HD471SN1 | 10 | 470Ω±25% | 100 | 1.20 |
| 28 | BLM18HD601SN1 | 10 | 600Ω±25% | 100 | 1.50 |
| 29 | BLM18HD102SN1 | 10 | 1000Ω±25% | 50 | 1.80 |
| 30 | BLM18PG330SN1 | 10 | 33Ω±25% | 3000 | 0.025 |
| 31 | BLM18PG181SN1 | 10 | 180Ω±25% | 1500 | 0.09 |
| 32 | BLM18PG221SN1 | 10 | 220Ω±25% | 1400 | 0.10 |
| 33 | BLM18PG331SN1 | 10 | 330Ω±25% | 1200 | 0.15 |
| 34 | BLM18PG471SN1 | 10 | 470Ω±25% | 1000 | 0.20 |
| 35 | BLM18SG260TN1 | 10 | 26Ω±25% | 6000 | 0.007 |
| 36 | BLM18SG700TN1 | 10 | 70Ω±25% | 4000 | 0.020 |
| 37 | BLM18SG121TN1 | 10 | 120Ω±25% | 3000 | 0.025 |
| 38 | BLM18SG221TN1 | 10 | 220Ω±25% | 2500 | 0.040 |
| 39 | BLM18SG331TN1 | 10 | 330Ω±25% | 1500 | 0.070 |
| 40 | BLM31PG391SN1 | 10 | 390Ω (Typ.) | 2000 | 0.05 |
| 41 | BLM31PG601SN1 | 10 | 600Ω (Typ.) | 1500 | 0.09 |
| 42 | BLM41PG181SN1 | 10 | 180Ω (Typ.) | 3000 | 0.025 |

Note • This PDF catalog is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. • This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

Chip EMI Suppression Filter Design Kits

Continued from the preceding page

| No. | Part Number | Quantity (pcs.) | Impedance typ. (at 100MHz, 20 degrees C) | Rated Current (mA) | DC Resistance (Ω) max. |
|-----|---------------|--------------------|---|-----------------------|---------------------------|
| 43 | BLM41PG471SN1 | 10 | 470Ω (Typ.) | 2000 | 0.05 |
| 44 | BLM41PG102SN1 | 10 | 1000Ω (Typ.) | 1500 | 0.09 |
| 45 | BLM18RK121SN1 | 10 | 120Ω±25% | 200 | 0.25 |
| 46 | BLM18RK471SN1 | 10 | 470Ω±25% | 200 | 0.5 |
| 47 | BLM18RK601SN1 | 10 | 600Ω±25% | 200 | 0.6 |
| 48 | BLM18RK102SN1 | 10 | 1000Ω±25% | 200 | 0.8 |
| 49 | BLM18HK471SN1 | 10 | 470Ω±25% | 200 | 0.7 |
| 50 | BLM18HK601SN1 | 10 | 600Ω±25% | 100 | 0.9 |
| 51 | BLM18HK102SN1 | 10 | 1000Ω±25% | 50 | 1.5 |
| 52 | BLM18EG121SN1 | 10 | 120Ω±25% | 2000 | 0.04 |
| 53 | BLM18EG221SN1 | 10 | 220Ω±25% | 1000 | 0.15 |
| 54 | BLM18EG471SN1 | 10 | 470Ω±25% | 500 | 0.21 |
| 55 | BLM18EG601SN1 | 10 | 600Ω±25% | 500 | 0.35 |

●EKEMBL21C (Chip Ferrite Beads 0805 Size)

| No. | Part Number | Quantity (pcs.) | Impedance typ. (at 100MHz, 20 degrees C) | Rated Current (mA) | DC Resistance (Ω) max. |
|-----|---------------|-----------------|---|-----------------------|-------------------------------|
| 1 | BLM21AG121SN1 | 10 | 120Ω±25% | 200 | 0.15 |
| 2 | BLM21AG221SN1 | 10 | 220Ω±25% | 200 | 0.20 |
| 3 | BLM21AG471SN1 | 10 | 470Ω±25% | 200 | 0.25 |
| 4 | BLM21AG601SN1 | 10 | 600Ω±25% | 200 | 0.30 |
| 5 | BLM21AG102SN1 | 10 | 1000Ω±25% | 200 | 0.45 |
| 6 | BLM21BB600SN1 | 10 | 60Ω±25% | 200 | 0.20 |
| 7 | BLM21BB750SN1 | 10 | 75Ω±25% | 200 | 0.25 |
| 8 | BLM21BB121SN1 | 10 | 120Ω±25% | 200 | 0.25 |
| 9 | BLM21BB221SN1 | 10 | 220Ω±25% | 200 | 0.35 |
| 10 | BLM21BB471SN1 | 10 | 470Ω±25% | 200 | 0.45 |
| 11 | BLM21BD121SN1 | 10 | 120Ω±25% | 200 | 0.25 |
| 12 | BLM21BD221SN1 | 10 | 220Ω±25% | 200 | 0.25 |
| 13 | BLM21BD471SN1 | 10 | 470Ω±25% | 200 | 0.35 |
| 14 | BLM21BD601SN1 | 10 | 600Ω±25% | 200 | 0.35 |
| 15 | BLM21BD102SN1 | 10 | 1000Ω±25% | 200 | 0.40 |
| 16 | BLM21BD182SN1 | 10 | 1800Ω±25% | 200 | 0.50 |
| 17 | BLM21BD222SN1 | 10 | 2250Ω (Typ.) | 200 | 0.60 |
| 18 | BLM21BD222TN1 | 10 | 2200Ω±25% | 200 | 0.60 |
| 19 | BLM21BD272SN1 | 10 | 2700Ω±25% | 200 | 0.80 |

●EKEMNFMCB (Chip EMIFIL® Capacitor Type for Signal Lines)

| No. | Part Number | Quantity (pcs.) | Capacitance | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (MΩ min.) |
|-----|----------------|--------------------|-------------|------------------------|-----------------------|------------------------------------|
| 1 | NFM18CC220U1C3 | 10 | 22pF±20% | 16 | 400 | 1000 |
| 2 | NFM18CC470U1C3 | 10 | 47pF±20% | 16 | 400 | 1000 |
| 3 | NFM18CC101R1C3 | 10 | 100pF±20% | 16 | 500 | 1000 |
| 4 | NFM18CC221R1C3 | 10 | 220pF±20% | 16 | 500 | 1000 |
| 5 | NFM18CC471R1C3 | 10 | 470pF±20% | 16 | 500 | 1000 |
| 6 | NFM18CC102R1C3 | 10 | 1000pF±20% | 16 | 600 | 1000 |
| 7 | NFM18CC222R1C3 | 10 | 2200pF±20% | 16 | 700 | 1000 |
| 8 | NFM18CC223R1C3 | 10 | 22000pF±20% | 16 | 1000 | 1000 |
| 9 | NFM21CC220U1H3 | 10 | 22pF±20% | 50 | 700 | 1000 |
| 10 | NFM21CC470U1H3 | 10 | 47pF±20% | 50 | 700 | 1000 |



Continued from the preceding page.

| No. | Part Number | Quantity (pcs.) | Capacitance | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (MΩ min.) |
|-----|-----------------------------|--------------------|-------------|------------------------|-----------------------|------------------------------------|
| 11 | NFM21CC101U1H3 | 10 | 100pF±20% | 50 | 700 | 1000 |
| 12 | 12 NFM21CC221R1H3 10 | | 220pF±20% | 50 | 700 | 1000 |
| 13 | NFM21CC471R1H3 | CC471R1H3 10 | | 50 | 1000 | 1000 |
| 14 | 14 NFM21CC102R1H3 10 | | 1000pF±20% | 50 | 1000 | 1000 |
| 15 | 15 NFM21CC222R1H3 10 | | 2200pF±20% | 50 | 1000 | 1000 |
| 16 | NFM21CC223R1H3 | 10 | 22000pF±20% | 50 | 2000 | 1000 |

●EKEMFA31C (Chip EMIFIL® Capacitor Array Type/ RC Combined Array Type)

| No. | Part Number | Quantity (pcs.) | Capacitance | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (M Ω min.) |
|-----|----------------|--------------------|-------------|------------------------|-----------------------|---|
| 1 | NFA31CC220S1E4 | 10 | 22pF±20% | 25 | 200 | 1000 |
| 2 | NFA31CC470S1E4 | 10 | 47pF±20% | 25 | 200 | 1000 |
| 3 | NFA31CC101S1E4 | 10 | 100pF±20% | 25 | 200 | 1000 |
| 4 | NFA31CC221S1E4 | 10 | 220pF±20% | 25 | 200 | 1000 |
| 5 | NFA31CC471R1E4 | 10 | 470pF±20% | 25 | 200 | 1000 |
| 6 | NFA31CC102R1E4 | 10 | 1000pF±20% | 25 | 200 | 1000 |
| 7 | NFA31CC222R1E4 | 10 | 2200pF±20% | 25 | 200 | 1000 |
| 8 | NFA31CC223R1C4 | 10 | 22000pF±20% | 16 | 200 | 1000 |
| 9 | NFA31GD1006R84 | 10 | 10pF±20% | 6 | 50 | 1000 |
| 10 | NFA31GD1004704 | 10 | 10pF±20% | 6 | 20 | 1000 |
| 11 | NFA31GD1001014 | 10 | 10pF±20% | 6 | 15 | 1000 |
| 12 | NFA31GD4706R84 | 10 | 47pF±20% | 6 | 50 | 1000 |
| 13 | NFA31GD4704704 | 10 | 47pF±20% | 6 | 20 | 1000 |
| 14 | NFA31GD4701014 | 10 | 47pF±20% | 6 | 15 | 1000 |
| 15 | NFA31GD1016R84 | 10 | 100pF±20% | 6 | 50 | 1000 |
| 16 | NFA31GD1014704 | 10 | 100pF±20% | 6 | 20 | 1000 |
| 17 | NFA31GD1011014 | 10 | 100pF±20% | 6 | 15 | 1000 |

●EKEMFL18E (Chip EMIFIL® LC Combined Type)

| No. | Part Number | Quantity (pcs.) | Cut-off Frequency | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (MΩ min.) | DC Resistance (Ω) max. |
|-----|----------------|--------------------|-------------------|------------------------|--------------------|------------------------------------|------------------------|
| 1 | NFL18ST207X1C3 | 10 | 200MHz | 16 | 150 | 1000 | 3.5 |
| 2 | NFL18ST307X1C3 | 10 | 300MHz | 16 | 200 | 1000 | 1.8 |
| 3 | NFL18ST507X1C3 | 10 | 500MHz | 16 | 200 | 1000 | 1.5 |
| 4 | NFL18SP157X1A3 | 10 | 150MHz | 10 | 100 | 1000 | 3.0 |
| 5 | NFL18SP207X1A3 | 10 | 200MHz | 10 | 100 | 1000 | 3.0 |
| 6 | NFL18SP307X1A3 | 10 | 300MHz | 10 | 100 | 1000 | 3.0 |
| 7 | NFL18SP507X1A3 | 10 | 500MHz | 10 | 100 | 1000 | 2.0 |
| 8 | NFL21SP106X1C3 | 10 | 10MHz | 16 | 100 | 1000 | 8.5 |
| 9 | NFL21SP206X1C7 | 10 | 20MHz | 16 | 100 | 1000 | 8.5 |
| 10 | NFL21SP506X1C3 | 10 | 50MHz | 16 | 150 | 1000 | 3.5 |
| 11 | NFL21SP706X1C3 | 10 | 70MHz | 16 | 150 | 1000 | 3.0 |
| 12 | NFL21SP107X1C3 | 10 | 100MHz | 16 | 200 | 1000 | 2.0 |
| 13 | NFL21SP157X1C3 | 10 | 150MHz | 16 | 200 | 1000 | 2.0 |
| 14 | NFL21SP207X1C3 | 10 | 200MHz | 16 | 250 | 1000 | 1.5 |
| 15 | NFL21SP307X1C3 | 10 | 300MHz | 16 | 300 | 1000 | 1.2 |
| 16 | NFL21SP407X1C3 | 10 | 400MHz | 16 | 300 | 1000 | 1.2 |
| 17 | NFL21SP507X1C3 | 10 | 500MHz | 16 | 300 | 1000 | 1.2 |





Continued from the preceding page

| No. | Part Number | Quantity | Cut-off | | | | At | tenuatio | n (dB mii | n.) | | | | Rated | Rated |
|-----|----------------|----------|-----------|----------|----------|----------|----------|----------|-----------|----------|----------|----------|------|------------|---------|
| NO. | Part Number | (pcs.) | Frequency | 10MHz | 20MHz | 50MHz | 100MHz | 150MHz | 200MHz | 300MHz | 400MHz | 500MHz | 1GHz | Current Vo | Voltage |
| 18 | NFW31SP106X1E4 | 10 | 10MHz | 6dB max. | 5 | 25 | 25 | - | 25 | - | - | 30 | 30 | 200mA | 25V |
| 19 | NFW31SP206X1E4 | 10 | 20MHz | - | 6dB max. | 5 | 25 | - | 25 | - | - | 30 | 30 | 200mA | 25V |
| 20 | NFW31SP506X1E4 | 10 | 50MHz | - | - | 6dB max. | 10 | - | 30 | - | - | 30 | 30 | 200mA | 25V |
| 21 | NFW31SP107X1E4 | 10 | 100MHz | - | - | - | 6dB max. | - | 5 | - | - | 20 | 30 | 200mA | 25V |
| 22 | NFW31SP157X1E4 | 10 | 150MHz | - | - | - | - | 6dB max. | - | 10 | 20 | 30 | 30 | 200mA | 25V |
| 23 | NFW31SP207X1E4 | 10 | 200MHz | - | - | - | - | - | 6dB max. | - | - | 10 | 30 | 200mA | 25V |
| 24 | NFW31SP307X1E4 | 10 | 300MHz | - | - | - | - | - | - | 6dB max. | - | 5 | 15 | 200mA | 25V |
| 25 | NFW31SP407X1E4 | 10 | 400MHz | - | - | - | - | - | - | - | 6dB max. | - | 10 | 200mA | 25V |
| 26 | NFW31SP507X1E4 | 10 | 500MHz | - | - | - | - | - | - | - | - | 6dB max. | 10 | 200mA | 25V |

●EKEMFA20A (Chip EMIFIL® LC Combined Array Type)

| No. | Part Number | Quantity (pcs.) | Cut-off Frequency | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (M Ω min.) |
|-----|-----------------|-----------------|-------------------|------------------------|-----------------------|---|
| 1 | NFA21SL806X1A48 | 10 | 80MHz | 10 | 20 | 1000 |
| 2 | NFA21SL207X1A45 | 10 | 200MHz | 10 | 100 | 1000 |
| 3 | NFA21SL207X1A48 | 10 | 200MHz | 10 | 100 | 1000 |
| 4 | NFA21SL307X1A45 | 10 | 300MHz | 10 | 100 | 1000 |
| 5 | NFA21SL307X1A48 | 10 | 300MHz | 10 | 100 | 1000 |
| 6 | NFA21SL287V1A48 | 10 | 280MHz | 10 | 100 | 1000 |
| 7 | NFA21SL317V1A48 | 10 | 310MHz | 10 | 100 | 1000 |
| 8 | NFA21SL337V1A48 | 10 | 330MHz | 10 | 100 | 1000 |

●EKEMNFMPE (Chip EMIFIL® for Large Current)

| No. | Part Number | Quantity (pcs.) | Capacitance | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (M Ω min.) |
|-----|----------------|--------------------|-----------------|------------------------|----------------------|---|
| 1 | NFM18PC104R1C3 | 10 | 0.1μF±20% | 16 | 2 | 1000 |
| 2 | NFM18PC224R0J3 | 10 | 0.22μF±20% | 6.3 | 2 | 1000 |
| 3 | NFM18PC474R0J3 | 10 | 0.47μF±20% | 6.3 | 2 | 1000 |
| 4 | NFM18PC105R0J3 | 10 | 1μF±20% | 6.3 | 2 | 500 |
| 5 | NFM18PS474R0J3 | 10 | 0.47μF±20% | 6.3 | 2 | 1000 |
| 6 | NFM18PS105R0J3 | 10 | 1μF±20% | 6.3 | 2 | 500 |
| 7 | NFM21PC104R1E3 | 10 | 0.1μF±20% | 25 | 2 | 1000 |
| 8 | NFM21PC224R1C3 | 10 | 0.22μF±20% | 16 | 2 | 1000 |
| 9 | NFM21PC474R1C3 | 10 | 0.47μF±20% | 16 | 2 | 1000 |
| 10 | NFM21PC105B1A3 | 10 | 1μF±20% | 10 | 4 | 500 |
| 11 | NFM21PC105B1C3 | 10 | 1μF±20% | 16 | 4 | 500 |
| 12 | NFM21PC225B0J3 | 10 | 2.2μF±20% | 6.3 | 4 | 200 |
| 13 | NFE31PT152Z1E9 | 10 | 1500pF +50/-20% | 25 | 6 | 1000 |
| 14 | NFE31PT222Z1E9 | 10 | 2200pF±50% | 25 | 6 | 1000 |
| 15 | NFE61PT102E1H9 | 10 | 1000pF +80/-20% | 50 | 2 | 1000 |
| 16 | NFE61PT472C1H9 | 10 | 4700pF +80/-20% | 50 | 2 | 1000 |
| 17 | NFM41PC204F1H3 | 10 | 0.2μF +80/-20% | 50 | 2 | 1000 |
| 18 | NFM41PC155B1E3 | 10 | 1.5μF±20% | 25 | 6 | 300 |





Continued from the preceding page.

●EKEMDL21F (Chip Common Mode Choke Coils)

| No. | Part Number | Quantity (pcs.) | Common Mode Impedance (at 100MHz, 20 degrees C) | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (MΩ min.) |
|-----|---------------|-----------------|--|------------------------|--------------------|------------------------------------|
| 1 | DLW21HN670SQ2 | 10 | 67Ω±25% | 50 | 330 | 10 |
| 2 | DLW21HN900SQ2 | 10 | 90Ω±25% | 50 | 330 | 10 |
| 3 | DLW21HN121SQ2 | 10 | 120Ω±25% | 50 | 280 | 10 |
| 4 | DLW21HN181SQ2 | 10 | 180Ω±25% | 50 | 250 | 10 |
| 5 | DLW21SN670SQ2 | 10 | 67Ω±25% | 50 | 400 | 10 |
| 6 | DLW21SN900SQ2 | 10 | 90Ω±25% | 50 | 330 | 10 |
| 7 | DLW21SN121SQ2 | 10 | 120Ω±25% | 50 | 370 | 10 |
| 8 | DLW21SN181SQ2 | 10 | 180Ω±25% | 50 | 330 | 10 |
| 9 | DLW21SN261SQ2 | 10 | 260Ω±25% | 50 | 300 | 10 |
| 10 | DLW21SN371SQ2 | 10 | 370Ω±25% | 50 | 280 | 10 |
| 11 | DLW31SN601SQ2 | 10 | 600Ω±25% | 50 | 260 | 10 |
| 12 | DLW31SN102SQ2 | 10 | 1000Ω±25% | 50 | 230 | 10 |
| 13 | DLW31SN222SQ2 | 10 | 2200Ω±25% | 50 | 200 | 10 |
| 14 | DLP0NSN670HL2 | 10 | 67Ω±20% | 5 | 110 | 100 |
| 15 | DLP0NSN900HL2 | 10 | 90Ω±20% | 5 | 100 | 100 |
| 16 | DLP0NSN121HL2 | 10 | 120Ω±20% | 5 | 90 | 100 |
| 17 | DLP11SN670SL2 | 10 | 67Ω±20% | 5 | 180 | 100 |
| 18 | DLP11SN121SL2 | 10 | 120Ω±20% | 5 | 140 | 100 |
| 19 | DLP11SN161SL2 | 10 | 160Ω±20% | 5 | 120 | 100 |
| 20 | DLP11SN900HL2 | 10 | 90Ω±20% | 5 | 150 | 100 |
| 21 | DLP11SN201HL2 | 10 | 200Ω±20% | 5 | 110 | 100 |
| 22 | DLP11SN241HL2 | 10 | 240Ω±20% | 5 | 100 | 100 |
| 23 | DLP11SN281HL2 | 10 | 280Ω±20% | 5 | 90 | 100 |
| 24 | DLP11SN331HL2 | 10 | 330Ω±20% | 5 | 80 | 100 |
| 25 | DLP2ADN670HL4 | 10 | 67Ω±20% | 5 | 140 | 100 |
| 26 | DLP2ADN900HL4 | 10 | 90Ω±20% | 5 | 130 | 100 |
| 27 | DLP2ADN121HL4 | 10 | 120Ω±20% | 5 | 120 | 100 |
| 28 | DLP2ADN161HL4 | 10 | 160Ω±20% | 5 | 100 | 100 |
| 29 | DLP2ADN201HL4 | 10 | 200Ω±20% | 5 | 90 | 100 |
| 30 | DLP2ADN241HL4 | 10 | 240Ω±20% | 5 | 80 | 100 |
| 31 | DLP2ADN281HL4 | 10 | 280Ω±20% | 5 | 80 | 100 |
| 32 | DLP31DN321ML4 | 10 | 320Ω±20% | 10 | 80 | 100 |
| 33 | DLP31DN441ML4 | 10 | 440Ω±20% | 10 | 70 | 100 |

●EKEMDCC5A (Chip Common Mode Choke Coils for DC Power Line)

| No. | Part Number | Quantity (pcs.) | Common Mode Impedance (at 100MHz, 20 degrees C) | Rated Voltage (Vdc) | Rated Current (mA) | Insulation Resistance (M Ω min.) |
|-----|---------------|--------------------|--|------------------------|-----------------------|---|
| 1 | DLW5AHN402SQ2 | 5 | 4000Ω (Typ.) | 50 | 200 | 10 |
| 2 | DLW5BSN191SQ2 | 5 | 190Ω (Typ.) | 50 | 5000 | 10 |
| 3 | DLW5BSN351SQ2 | 5 | 350Ω (Typ.) | 50 | 2000 | 10 |
| 4 | DLW5BSN102SQ2 | 5 | 1000Ω (Typ.) | 50 | 1500 | 10 |
| 5 | DLW5BSN152SQ2 | 5 | 1500Ω (Typ.) | 50 | 1000 | 10 |
| 6 | DLW5BSN302SQ2 | 5 | 3000Ω (Typ.) | 50 | 500 | 10 |
| 7 | DLW5BTN101SQ2 | 5 | 100Ω (Typ.) | 50 | 6000 | 10 |
| 8 | DLW5BTN251SQ2 | 5 | 250Ω (Typ.) | 50 | 5000 | 10 |
| 9 | DLW5BTN501SQ2 | 5 | 500Ω (Typ.) | 50 | 4000 | 10 |
| 10 | DLW5BTN102SQ2 | 5 | 1000Ω (Typ.) | 50 | 2000 | 10 |
| 11 | DLW5BTN142SQ2 | 5 | 1400Ω (Typ.) | 50 | 1500 | 10 |

| No. | Part Number | Quantity (pcs.) | Insertion Loss | Rated Voltage (Vdc) | Rated Current (A) | Insulation Resistance (M Ω min.) |
|-----|-------------|--------------------|-------------------------|------------------------|----------------------|---|
| 12 | BNX022-01 | 5 | 1MHz to 1GHz: 35dB min. | 50 | 10 | 500 |

1. EMI Regulations

| Ec | Countries | Information Regulation | Japan | USA | Europe |
|----------|---|---|---|---|---|
| | Generic Standard | CISPR61000-6-3 (Residential, Commercial and Light Industry) IEC61000-6-4 (Industrial) | | | EN50081-1 (Residential, Commercial and Light Industry) EN50081-2 (Industrial) |
| • | ITE: Information Technology Equipment Printers, Personal computers Word processors, Displays | CISPR 22 | VCCI *1 | FCC Part 15 Subpart B | EN55022 |
| | ISM equipment, Microwaves | CISPR 11 | *1 | FCC Part 18 | EN55011 |
| sion | Igniter (Automobiles, Motorboats) | CISPR 12 | JASO | FCC Part 15 Subpart B | Automotive Directive |
| Emission | TVs, Radios, Audios, VTRs | CISPR 13 | *1 | FCC Part 15 Subpart B | EN55013 |
| | Household electrical equipment Portable tools | CISPR 14 | *1 | | EN55014 |
| | Fluorescent Lamps, Luminaries | CISPR 15 | *1 | FCC Part 18 | EN55015 |
| | Transceivers | ITU-T | Radio Act ARIB (Voluntary Regulation) | FCC Part 15 Subpart C FCC Part 22 | ETS300 Series |
| | (Reference) Power Supplies Higher Harmonics | IEC61000-3 | Industrial Voluntary Regulation | | EN61000-3 |
| | Basic Standard | IEC61000-4 | JIS C 61000-4 | | EN61000-4 Series |
| Immunity | Generic Standard | IEC61000-6-1 (Residential, Commercial and Light Industry) IEC61000-6-2 (Industrial) | JIS C 61000-6-1 (Residential, Commercial and Light Industry) JIS C 61000-6-2 (Industrial) | | EN50082-1 (Residential, Commercial and Light Industry) EN50082-2 (Industrial) |
| <u>E</u> | Industrial Process Measurement and Control Equipment | | | | |
| | Radios, TVs | CISPR 20 | Industrial Voluntary Action | | EN55020 |
| | ITE: Information Technology Equipment | CISPR 24 | | | EN55024 |

*1 Electrical Appliance and Material Safety Law


There are EMI regulations in each country to meet EMI noise levels emitted from digital equipment. In the countries which regulate EMI, equipment which does not satisfy regulations is not allowed to be sold.



 $\begin{tabular}{|c|c|c|c|}\hline \end{tabular}$ Continued from the preceding page


2. Measurement Point and Noise Detection


| Regulation | Measuring Item | Polarization and Measuring Point | Frequency (Hz) | Detection | Measuring Devices |
|-------------|---------------------------|----------------------------------|----------------|-------------------------------------|-------------------------|
| CISPR 22/ | Radiated Interference | Horizontal Pol. Vertical Pol. | 30M to 1GHz | Quasi-Peak Detection | Antenna |
| EN55022 | Main Interference Voltage | AC Main Ports | 150k to 30MHz | Quasi-Peak Detection Mean Detection | Artificial Main Network |
| VCCI | Radiated Interference | Horizontal Pol. Vertical Pol. | 30M to 1GHz | Quasi-Peak Detection | Dipole Antenna |
| VCCI | Main Interference Voltage | AC Main Ports | 150k to 30MHz | Quasi-Peak Detection Mean Detection | Artificial Main Network |
| FCC Dort 15 | Radiated Interference | Horizontal Pol. Vertical Pol. | 30M to 40GHz | Quasi-Peak Detection Mean Detection | Antenna |
| FCC Part 15 | Main Interference Voltage | AC Main Ports | 150k to 30MHz | Quasi-Peak Detection | Artificial Main Network |

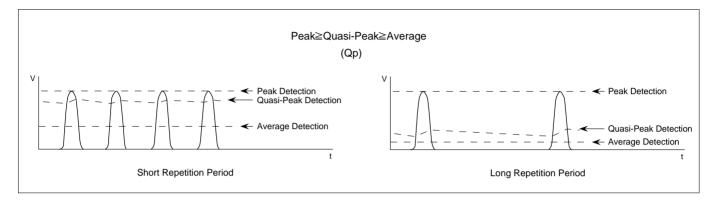

3. Limits of CISPR 22/EN55022

(1) CISPR 22 recommends measurement at 10m distance. However, other distance is acceptable if the limitation is converted according to the following calculation. Limitation shown left is converted to limitation for 3m distance.

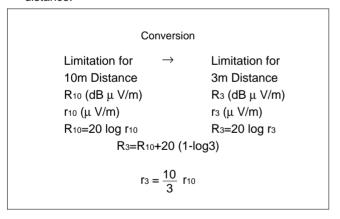

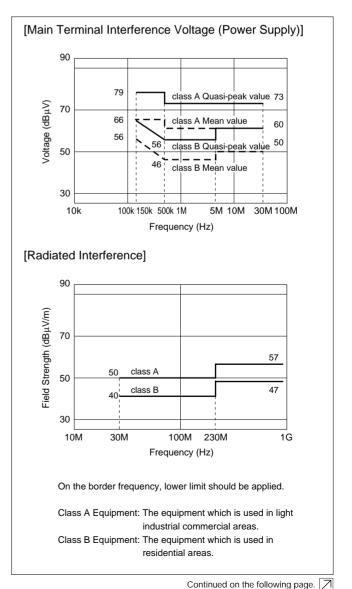

Continued from the preceding page

(2) Scope of CISPR 22 Regulation This regulation applies to information technology

equipment (ITE) which is defined as:

- (a) Equipment that receives data from external signal sources:
- (b) Equipment that processes received data;
- (c) Equipment that outputs data; and
- (d) Equipment that has less than 600V rated voltage in power supply.

4. Limits of VCCI Voluntary Regulation

- (1) VCCI recommends measurement at 10m distance; 3m or 30m distance measurements are also allowed.
- (2) Scope of VCCI Voluntary Regulation This regulation applies to information technology equipment (same as CISPR Pub.22), but the application is excluded on the following equipment:
 - · Equipment for which other regulations already exist (e.g., household electrical appliances, radio and TV receivers)
 - · In station equipment principal purpose of which is electrical communication
 - · Industrial plant control system for which information processing is a secondary system function
 - · Industrial, commercial and medical testing and measuring systems for which data processing is a secondary system function
 - · Information equipment for which CISPR is conducting further deliberation

VCCI is the acronym of Voluntary Control Council for Interference by Data Processing Equipment and Electronic Office Machines.

VCCI is organized by the following organizations:

- · Japan Electronics and Information Technology Industries Association (JEITA)
- Japan Business Machine and Information System Industries Association (JBMIA)
- · Communication and Information Network Association of Japan (CIAJ)

[CISPR Regulations]

CISPR 10 Organization, Regulations and Procedures of CISPR

CISPR 11 Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment

CISPR 12 Vehicles, Motor Boats and Spark-Ignited Engine driven

CISPR 13 Sound and Television Receivers

CISPR 14 Household Electrical Appliances, Portable Tools and Similar **Electrical Apparatus**

CISPR 15 Fluorescent Lamps and luminaries

CISPR 16 Radio Interference Measuring Apparatus and Measurement Methods

CISPR 17 Passive Radio Interference Filters and Suppression Components

CISPR 18 Power Transmission Cables and High Voltage equipment

CISPR 19 Microwave Ovens for Frequencies above 1GHz

CISPR 20 Immunity of Sound and TV Broadcast Receivers and Associated Equipment

CISPR 21 Interference to Mobile Radio communications in the Presence of Impulsive Noise


CISPR 22 Information Technology Equipment

CISPR 23 Industrial Scientific and Medical (ISM) Equipment


CISPR 24 Immunity Regulation of Information Technology Equipment

CISPR 25 Receiver used on board vehicles, boats, and on devices

[Main Terminal Interference Voltage (Power Supply)]

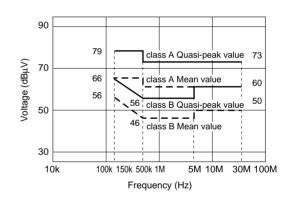

[Radiated Interference]

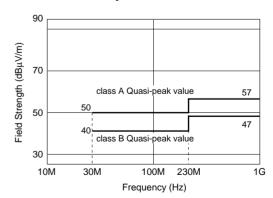

On the border frequency, lower limit should be applied.

Class B ITE: Equipment that is designed to be used at home. Class A ITE: Equipment that does not meet interference limits of class B equipment, but satisfies interference limits of class A equipment.






Continued from the preceding page

- 5. Limits of FCC Part 15 Subpart B
- (1) Class A recommended to be measured with 10m distance. Class B recommended to be measured with 3m distance.
- (2) The FCC Part 15 regulation controls radiated interference by establishing quasi-peak and mean value limits for frequencies ranging from 30MHz to 40GHz (or maximum frequency's fifth harmonic, whichever is lower). For AC main ports, the FCC Part 15 regulation controls main terminal interference voltage by establishing quasipeak value limits for frequencies ranging from 450kHz to 30MHz.

Measurement Frequency Range for Radiated Interference

| Maximum Frequency the Equipment Internally Generates, Uses or Operates or Synchronizes (MHz) | Upper End of Measurement Frequency Range (MHz) | |
|---|---|--|
| Less than 1.705 | 30 | |
| 1.705 to 108 | 1000 | |
| 108 to 500 | 2000 | |
| 500 to 1000 | 5000 | |
| Over 1000 | Maximum Frequency's Fifth Harmonic or 40GHz, Whichever is Lower | |

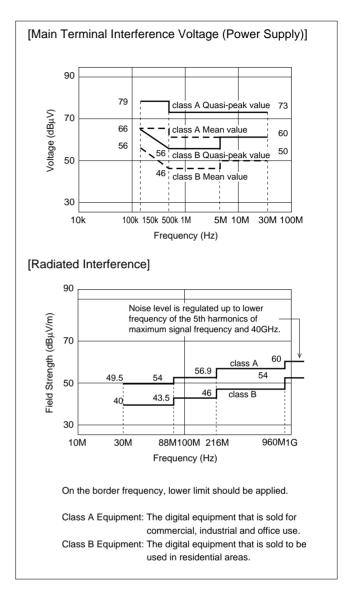

(3) There is no regulation on power interference.

[FCC Regulations]

Part 1 Procedures

Frequency Division and Radio Wave Treaty Issues and General Rules

Part 15 Radio Wave Equipment

- Intentionally electromagnetic radiation equipment
- · Non-intentionally electromagnetic radiation equipment
- · Incidentally electromagnetic radiation equipment
- Part 18 Industrial, Scientific and Medical Equipment
- Part 22 Public Mobile Wireless Operations
- Part 68 Connecting Terminal Equipment to Telephone Circuit Network

Part 76 Cable Television





• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications because there is no space for detailed specifications.

Outlines of Major Noise Regulation Standards

Continued from the preceding page

6. Immunity Regulations in the European Union All electric/electronic equipment cannot be sold in Europe without CE marking. To use CE marking, they must satisfy related EC directives such as EMC directives. For Information Technology Equipment, in EMC directive, emission regulations are integrated, and immunity regulations are applied. Although these immunity regulations are prepared by CENELEC, almost all contents are same as standards issued by IEC or CISPR.

All products which are sold in EU must satisfy EC directives which contain immunity regulations.

| Principal EC Directive | | | | |
|---|-------------------------|--|--|--|
| EMC Directive | 89/336/EEC 92/31/EEC | | | |
| Low-Voltage Electrical Products Directive | 73/23/EEC | | | |
| Machines Directive | 89/392/EEC | | | |

7. Immunity Regulations in Japan

| Equipment | Association | |
|--|---|--|
| TV, Radio, Audio | JEITA (Japan Electronics and Information Technology) | |
| ITE | SELLA Dabati Electronics and information reclinology) | |
| Office Machine | JBMIA (Japan Business Machine and Information System Industries Association) | |
| Mi | CIAJ (Communication and Information Network Association of Japan) ARIB (Association of Radio Industries and Business) | |
| Machine To Builders | JMTBA (Japan Machine Tool Builders' Association) | |
| Industrial Measuring Control Equipment | JEMIMA (Japan Electric Measuring Instruments Manufacturers' Association) | |
| Industrial Robot | JARA (Japan Robot Association) | |

The table on the right shows the preparation situation of JIS for EMC. At this moment, the immunity standards by JIS do not have a legal force like the Electrical Application and Material Safety Law/VCCI.

| Classification | Information Regulation | JIS |
|------------------|--|--|
| Terms | ISO60050-161 (IEV terms 161) | JIS C 0161 |
| Basic Standard | IEC61000-4- 2 IEC61000-4- 3 IEC61000-4- 4 IEC61000-4- 5 IEC61000-4- 6 IEC61000-4- 7 IEC61000-4- 8 IEC61000-4-11 IEC61000-4-14 IEC61000-4-17 | JIS C 61000-4-2 JIS C 61000-4-3 JIS C 61000-4-4 JIS C 61000-4-5 JIS C 61000-4-6 JIS C 61000-4-7 JIS C 61000-4-11 JIS C 61000-4-14 JIS C 61000-4-17 |
| Generic Standard | IEC61000-6-1 IEC61000-6-2 | JIS C 61000-6-1 JIS C 61000-6-2 |



1. Function of DC EMI Suppression Filters

DC EMI suppression filters absorb and eliminate high frequency noise which may produce electromagnetic interference in PC board circuits.

These filters are used in secondary circuits, and are small in size and light in weight, which further enhances their excellent noise suppression functions.

Chip and adhesive type filters can be mounted on PC boards automatically.

These filters are effective in the suppression of radiation noise in computers, peripheral equipment, and digital circuit application equipment (including various types of microcomputer application equipment), and function to suppress noise in audio/visual equipment, which uses digital memory chips and DSP.

These filters are also effective for improving the noise immunity of equipment used in noisy environments (such as electronic equipment for automobiles).

2. Noise Filter Suppression Principles

Generally, noise problems occur when the noise source and electronic equipment sensitive to the influence of noise are located in close proximity to one another. In such situations, as shown in Figure at right, noise is conducted through a conductor, which produces an inductive field around the noise source.


To overcome such noise problems, it is preferable to reduce the amount of noise generated by the noise source or improve the noise resistance of adjacent equipment.

In order to satisfy equipment performance specifications and eliminate noise effectively at the same time, however, it is customary to reduce the amount of noise generated by the noise source, if it can't be eliminated altogether.

3. Configuration of EMI Suppression Filters (DC) DC EMI suppression filters are used to suppress noise produced by conductors. Noise radiation can be suppressed, if it is eliminated with a filter in advance. Generally, such noise suppression is achieved with DC EMI suppression filters, according to the capacitive and inductive frequency characteristics of the respective conductors in the circuit.

Filters of this kind can be roughly divided into those:

- (1) employing a capacitor,
- (2) employing an inductor,
- (3) employing a capacitor and inductor combination.

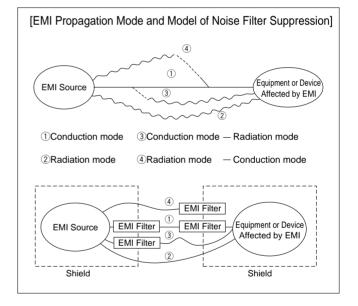





Continued from the preceding page

4. Capacitive Noise Suppression

When a capacitor is connected (bypass capacitor) to ground from a noisy signal line or power line, the circuit impedance decreases as the frequency increases. Since noise is a high frequency phenomenon, it flows to ground if a capacitor has been connected to ground, thereby making it possible to eliminate noise. (See Fig.) EMI suppression filters employing a capacitor in this way are used to eliminate this type of noise.

5. High frequency Capacitor Characteristics Used for EMI Suppression Filters

Even general-purpose capacitors can be used for noise suppression. However, since noise has an extremely high frequency range, general-purpose capacitors may not function as effective bypass capacitors, due to the large residual inductance built into the capacitor.

All the capacitors used in Murata's EMI suppression filters employ a three terminal structure or thru-type structure, which functions effectively even at high frequencies, thereby minimizing the influence of residual inductance. Consequently, an effective filter circuit can be formed even at frequencies exceeding 1GHz. (Refer to Fig.)


[Capacitive Noise Suppression] Noise+Signal/DC Powe Signal/DC Powe : Frequency c : Capacitance Value


[Equivalent circuit of general-purpose capacitor and three terminal capacitor in the high frequency area and comparison of insertion loss]

(a) Construction of capacitor

Two terminal capacitor


Three terminal capacitor






(b) Equivalent circuit of capacitors which is concerning ESL effect.






(c) Improvement of Insertion Loss Characteristics

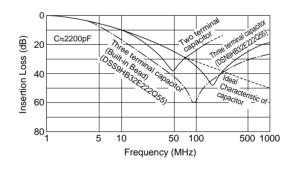

6. Inductive Noise Suppression

When an inductor is inserted in series in a noise producing circuit (See Fig.), its impedance increases with frequency. In this configuration it is possible to attenuate and eliminate noise components (high frequency components). The Murata EMI suppression filter functions in this way.

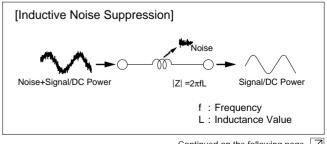



[Equivalent Circuit]

inductor type EMIFIL®]

Continued from the preceding page

7. Characteristics of Inductors Used in EMI Suppression Filters

General-purpose inductors also function to suppress noise when configured in series with a noise producing circuit. However, when general-purpose inductors are used, resonance may result in peripheral circuits, signal wave forms may become distorted, and satisfactory impedance may not be obtained at noise frequencies (due to insufficient high frequency impedance characteristics).

The inductors used for Murata's EMI suppression filters are designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted. And since sufficient impedance is obtained for frequencies ranging to hundreds of MHz, these specifically designed inductors operate effectively to suppress high-frequency noise. (See Fig.)

BL02RN2 160 140 120 mpedance (Ω) 100 R 80 60 40 20 20 50 100 200 500 1000 Frequency (MHz)

(Resistance element becomes dominant at high frequency.)

[Example of impedance frequency characteristics of

8. Capacitive-Inductive EMI Suppression Filters If capacitive and inductive suppression characteristics are combined, it is possible to configure a much higher performance filter. In signal circuit applications where this combination is applied, noise suppression effects which have little influence on the signal wave form become possible.

This type of filter is also effective in the suppression of high-speed signal circuit noise. When used in DC power circuits, capacitive-inductive filters prevent resonance from occurring in peripheral circuits, thus making it possible to achieve significant noise suppression under normal service conditions.

9. Other EMI Suppression Filters

In addition to the capacitive-inductive filter, Murata also has an EMI suppression filter (EMIGUARD®) combining a capacitor with a varistor, useful for surge absorption; and a common mode choke coil effective, for common mode noise suppression.

Murata also has a range of built-in filter connectors which greatly reduce filter mounting space requirements.




Continued from the preceding page

10. Expressing EMI Suppression Filter Effects

EMI Suppression Filter effects are expressed in terms of the insertion loss measured in the circuit, normally specified in MIL-STD 220A. As shown in the 50Ω impedance circuit in the Figure at right, insertion loss is represented by the logarithmic ratio of the circuit output voltage with and without a filter in the circuit, which is multiplied by 20 and expressed in dB.

Therefore, an insertion loss of 20dB indicates an output voltage ratio (B/C) of 1/10, and an insertion loss of 40dB indicates an output voltage ratio (B/C) of 1/100.

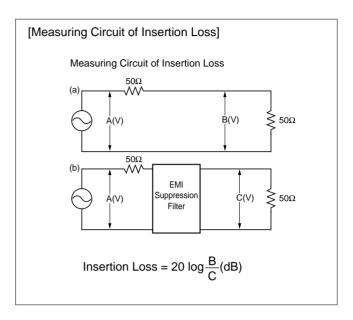





Murata EMI Filter Selection Simulator Ver. 3.2.0

New products are available

- Select circuit.
- (Select a new simulation circuit from File menu.)
- **Enter** "Input Signal".
- 3 Set Driver IC.
- 4 Select filter.

(EMI filters or/and chip capacitor from the pulldown list.)

Set **Transmission** Line.


Receiver IC.

Click measuring point.

(Only for chip ferrite bead)


- Click "Start Simulation" button.
- **Simulation** results are displayed.

- Simulation results with various charts are quickly displayed on your PC.
- Results can be displayed in standard format or user defined scaling.
- Simulates various types of circuit such as Differential Mode Transmission, ceramic capacitor, EMIFIL®, three terminal capacitor and chip ferrite beads.
- Provides a simulation function that selects best suited Chip EMIFIL®.

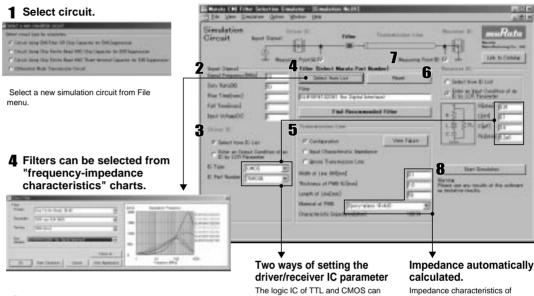


Simulation results are shown in the window.

be selected from pull-down list or the LCR values can also be created. transmission line are automatically calculated.



Link to the web catalog is available

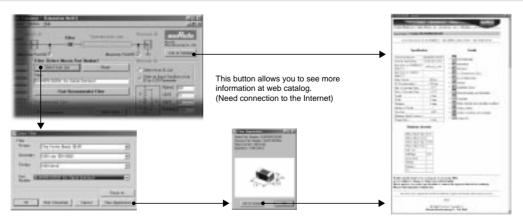

EMIFIL® is the trademark of Murata Manufacturing Co., Ltd

This simulator can be downloaded from Murata web site.

http://www.murata.com/emi/

C31E.pdf 06.9.8

sales representatives or product engineers before ordering.

• This PDF catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

♠ Note:

1. Export Control

Murata products should not be used or sold for use in the development, production, stockpiling or utilization of any conventional weapons or mass-destructive weapons (nuclear weapons, chemical or biological weapons, or missiles), or any other weapons.

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

- 2. Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.
 - 1 Aircraft equipment 3 Undersea equipment
- 2 Aerospace equipment 4 Power plant equipment
- (5) Medical equipment
- 6 Transportation equipment (vehicles, trains, ships, etc.)
- Traffic signal equipment
- 8 Disaster prevention / crime prevention equipment

- Data-processing equipment
- 10 Application of similar complexity and/or reliability requirements to the applications listed above
- 3. Product specifications in this catalog are as of July 2006. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product
- 4. Please read rating and ACAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.
- 5. This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.
- 6. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.
- 7. No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.



http://www.murata.com/

Phone: 81-75-951-9111