150103 | Hay 45tk 16-32

data LUTs

~120 total

3.2clk/inst 1 Inst = 1.5 "MIPS"

200 MHz / 3 x 1.5 = 100 MHz

200 LUTs

≈ 500 K MIPS/sec/LUT
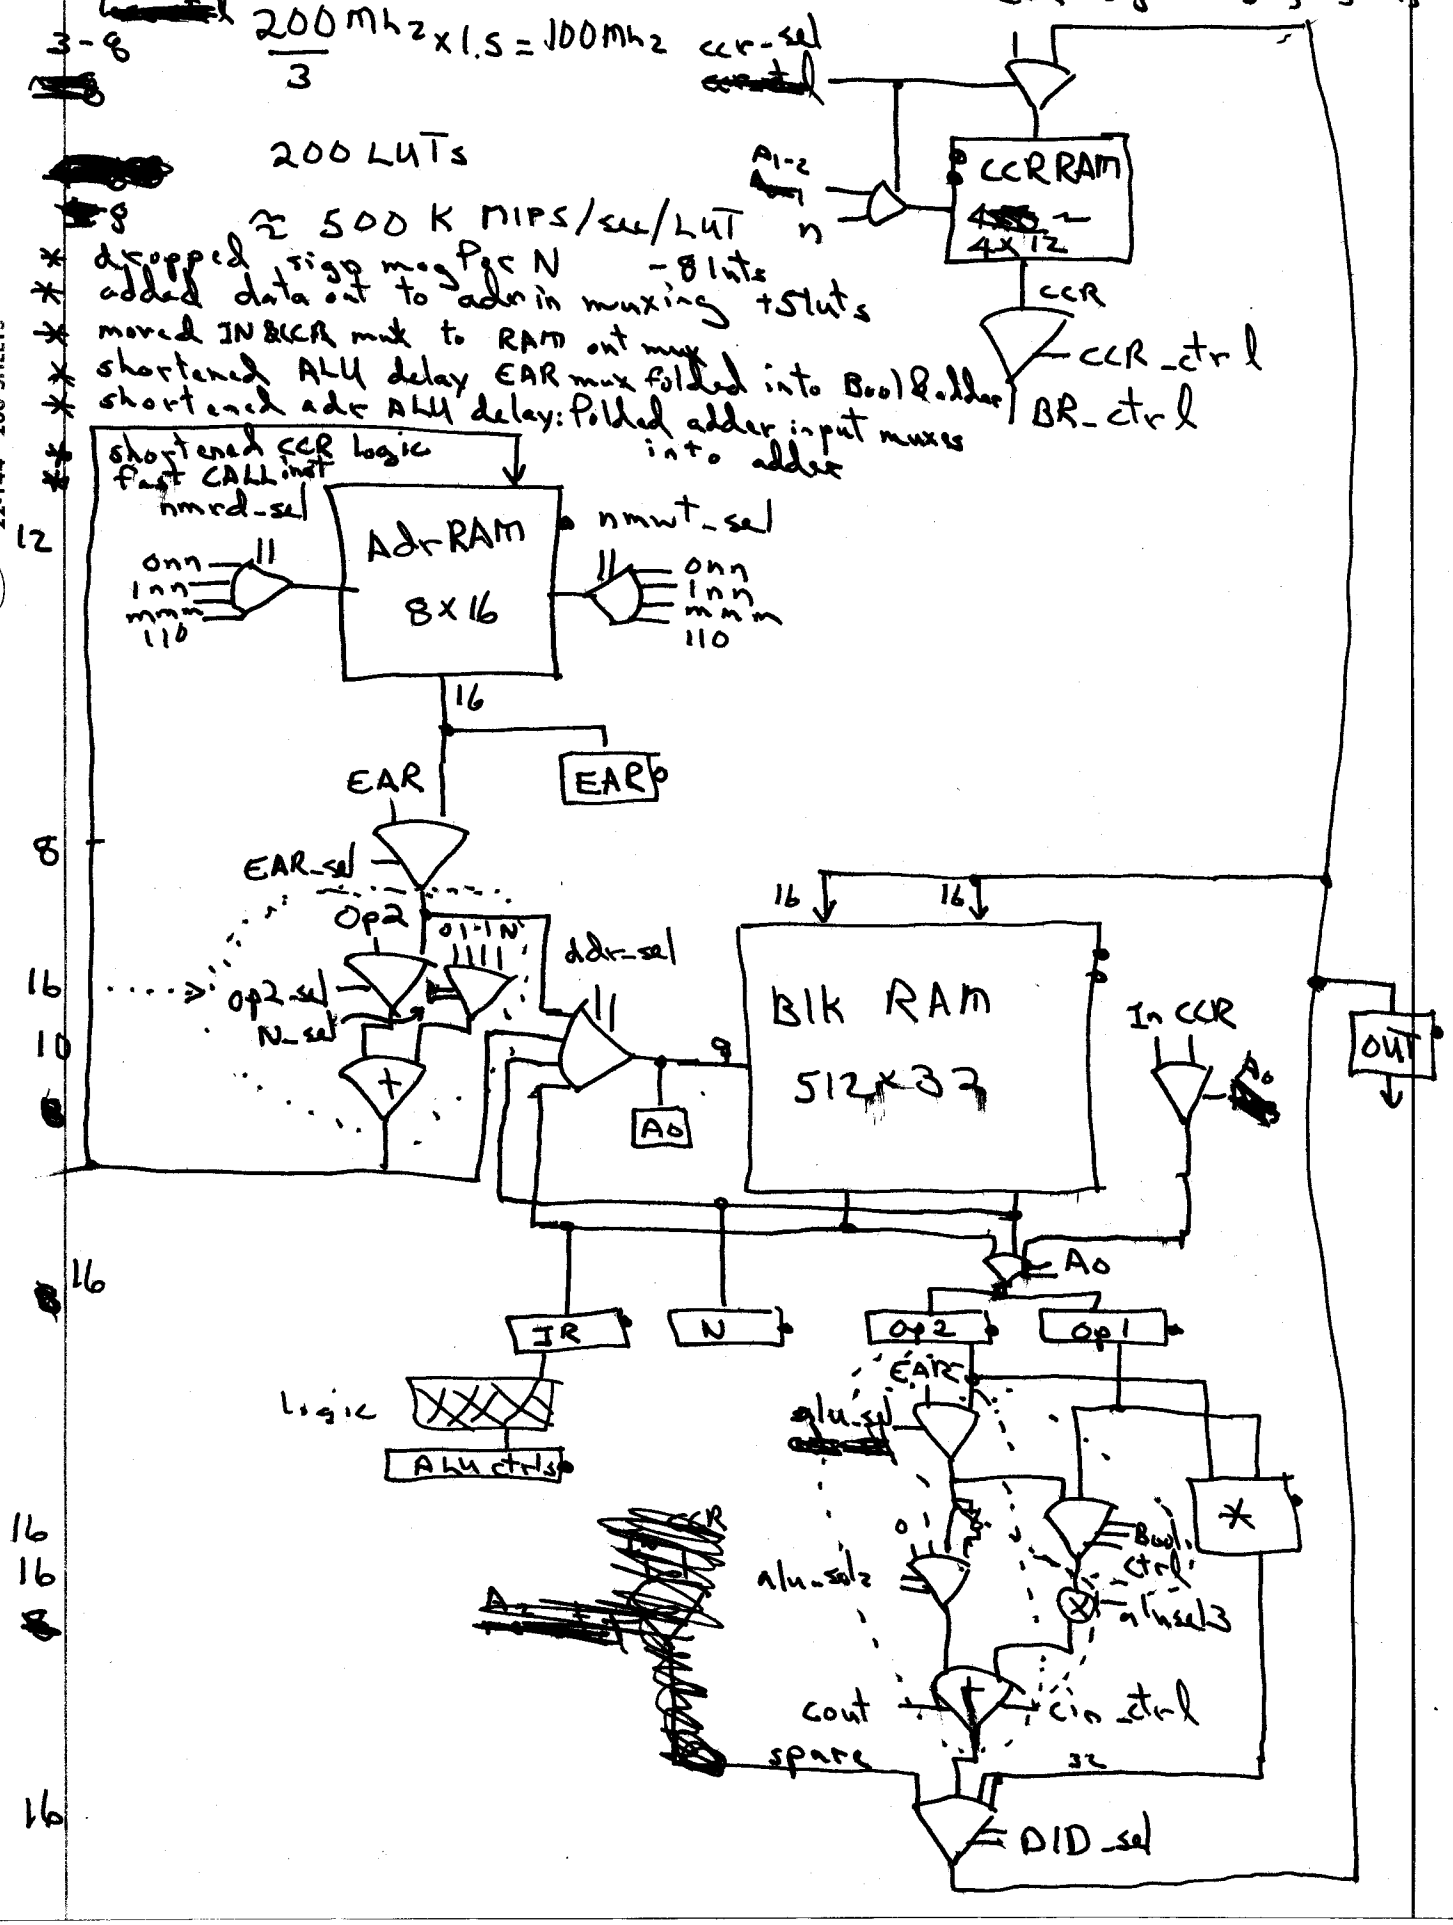
* dropped sign mag per N -8 luts
* added data out to adr in muxing +5 luts
* moved IN & CCR mux to RAM out mux
* shortened ALU delay EAR mux folded into Bool & Adder
* shortened adr ALU delay: folded adder input muxes into adder