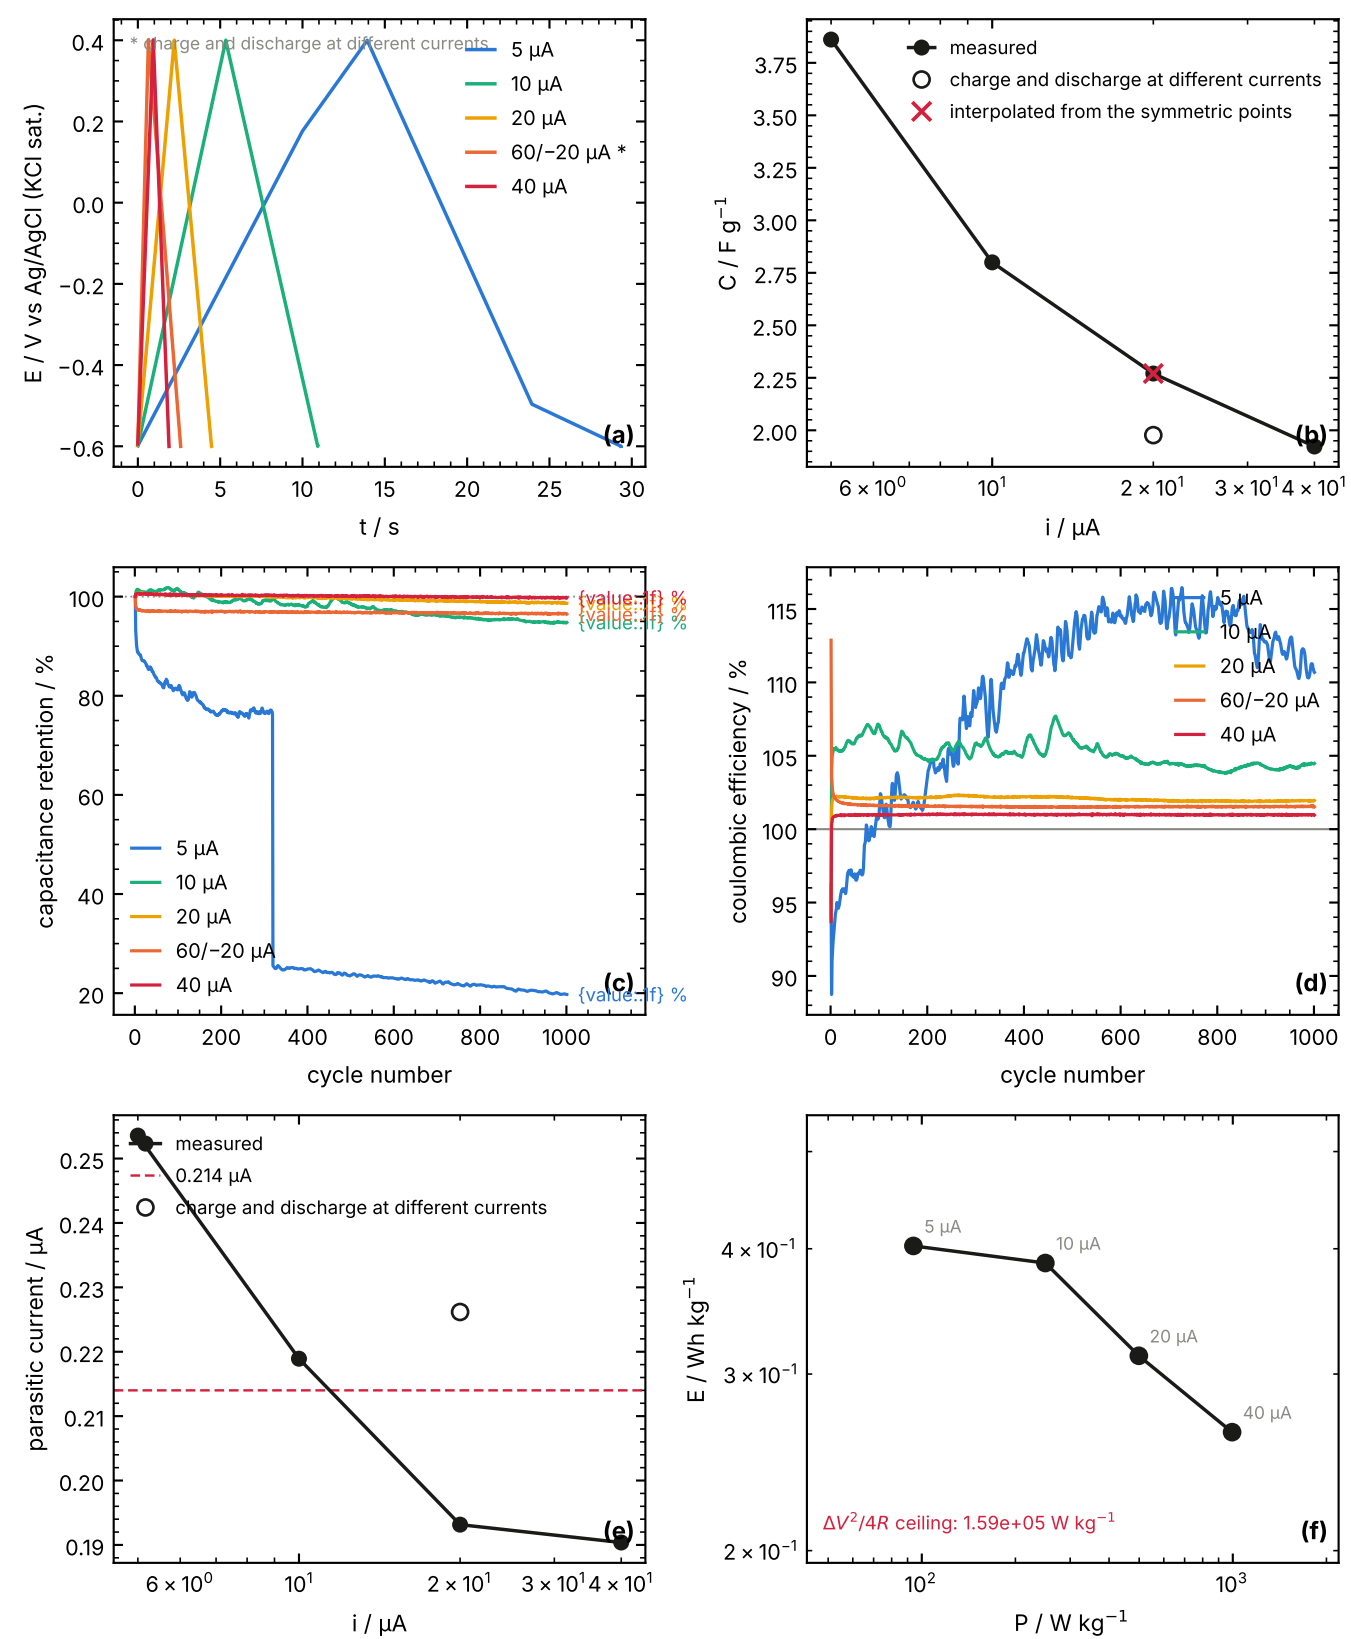

* charge and discharge at different currents
5 µA
10 µA
20 µA
60/−20 µA *
40 µA
E / V vs Ag/AgCl (KCl sat.)
t / s
(a)
measured
charge and discharge at different currents
interpolated from the symmetric points
C / F g⁻¹
i / µA
(b)
capacitance retention / %
cycle number
(c)
coulombic efficiency / %
cycle number
(d)
measured
0.214 µA
charge and discharge at different currents
parasitic current / µA
i / µA
(e)
E / Wh kg⁻¹
P / W kg⁻¹
ΔV²/4R ceiling: 1.59e+05 W kg⁻¹
(f)