


- △ 1 Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- △ 2 Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- △ 3 Leads: material- BeCu Alloy 194; plating- 60/40 SnPb (150-400µ")


compatible target board  
land dimensions  
A < 0.896"  
B > 0.976"

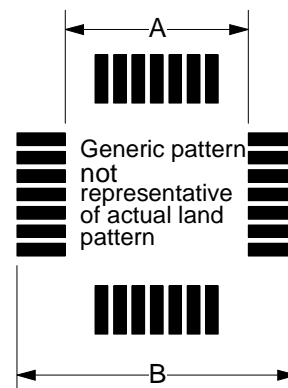

Description: Surface Mount Foot

68 position male terminal pins to 68 position PLCC J-leaded surface mount foot.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

<b>SF-PLCC68-J-01 Dwg</b>	<b>Status: Released</b>	<b>Scale: 4:1</b>	<b>Rev: E</b>
 <p>© 1994 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com</p>	<b>Drawing: C. Hautman</b>		<b>Date: 02/02/94</b>
	<b>File: SF-PLCC68-J-01 Dwg</b>		<b>Modified: 9/22/98</b>