
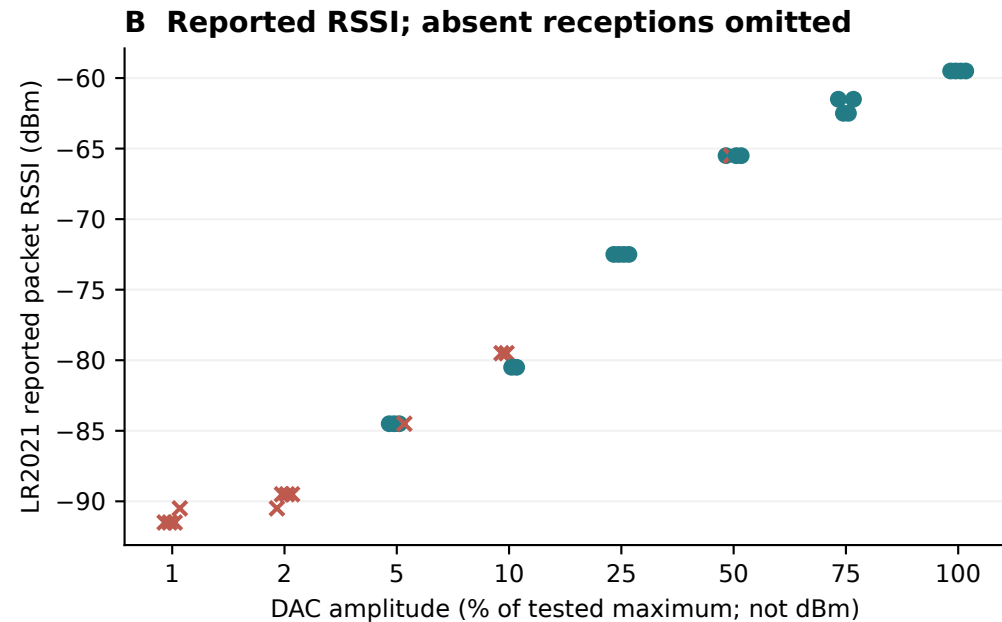


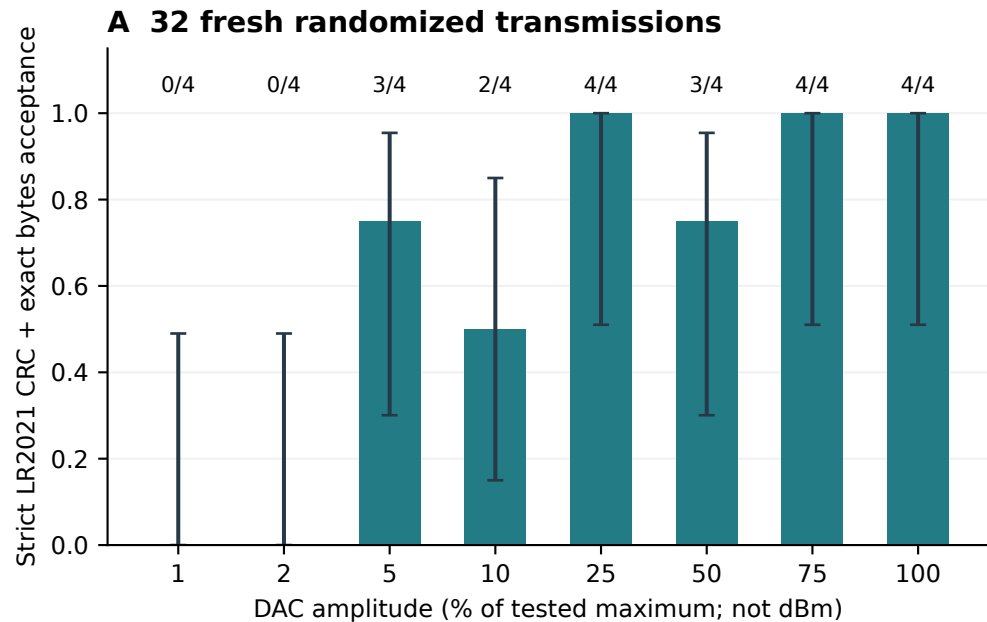

SF7, CR4/5, 32 bytes, BW203.125 kHz, 2440.125 MHz; four attempts per level, no retries.

Bars show actual counts; intervals are Wilson 95%, descriptive only for this stationary indoor pair.

RSSI circles: accepted packets; crosses: rejected metadata/CRC. No calibrated radiated-power or sensitivity claim.