



A Constant-DAC analog gain sweep

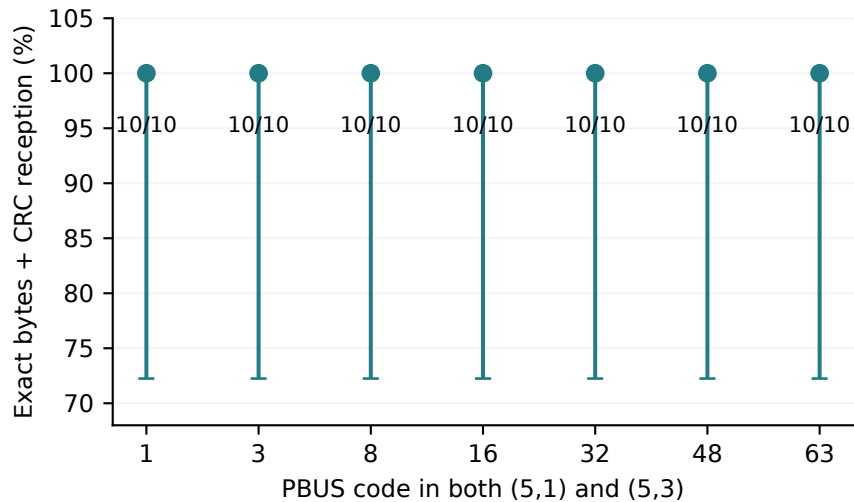

B Received packets only; median marks

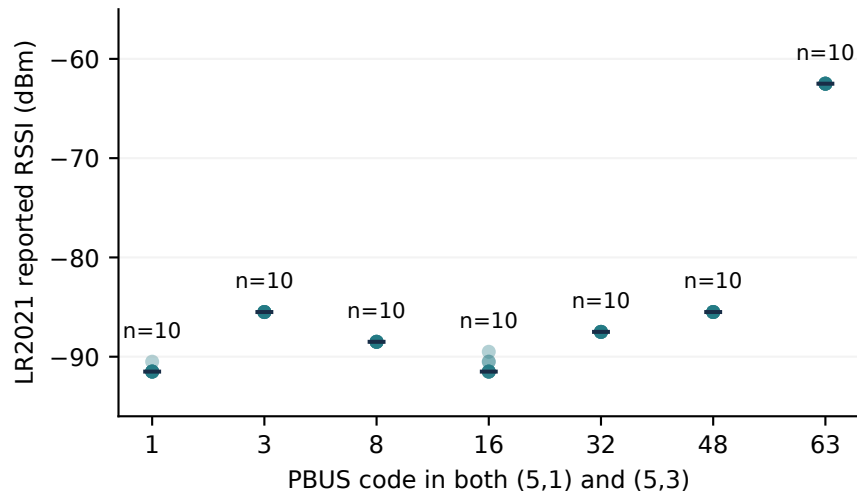

SF7 · BW203.125 kHz · CR4/8 · 32 fresh random bytes · DAC amplitude 150 · 10 shuffled blocks
Undocumented codes are not calibrated power or monotonic. One stationary bench; Wilson 95% intervals; successful-packet RSSI only.