


ESP32-S3 LoRa · Arduino on-device TX / RX

A · Six directed RF links



B · Autonomous ping / pong

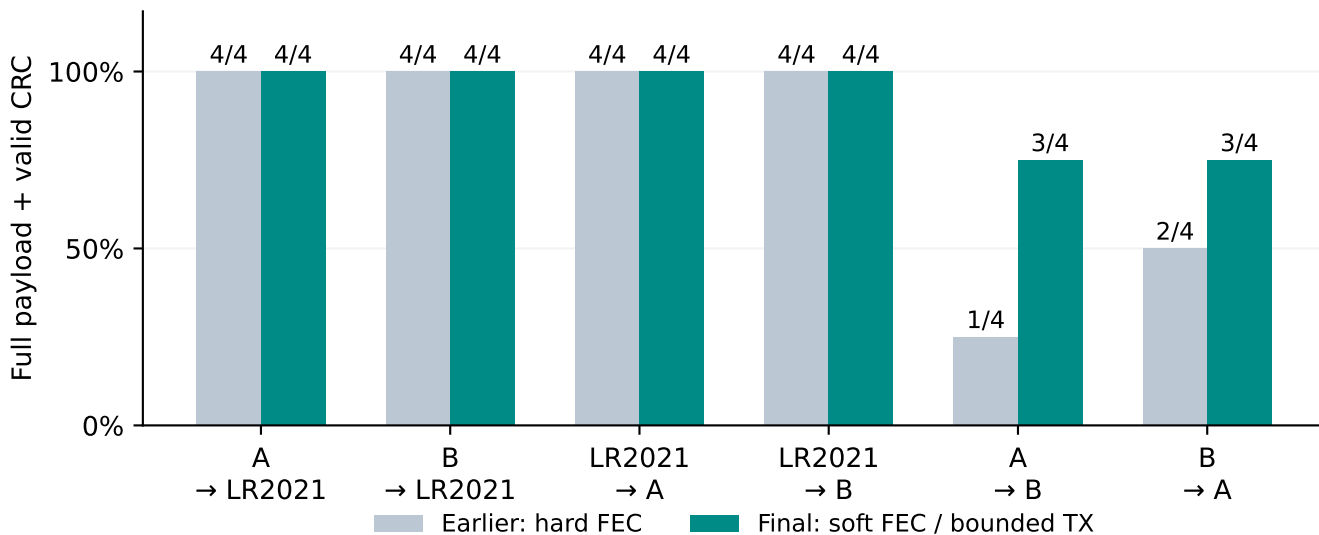