



Sensor Orientation:

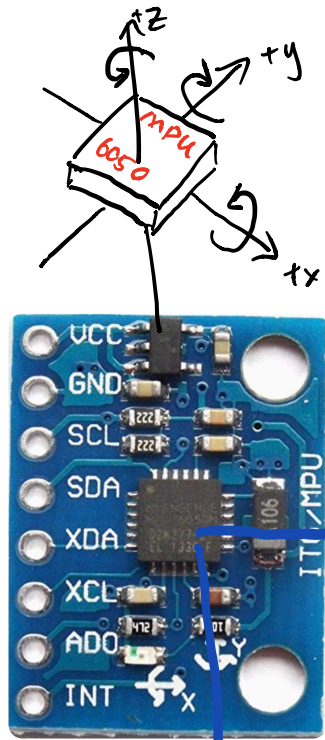


CENTRAL OPERATING UNIT (COU)

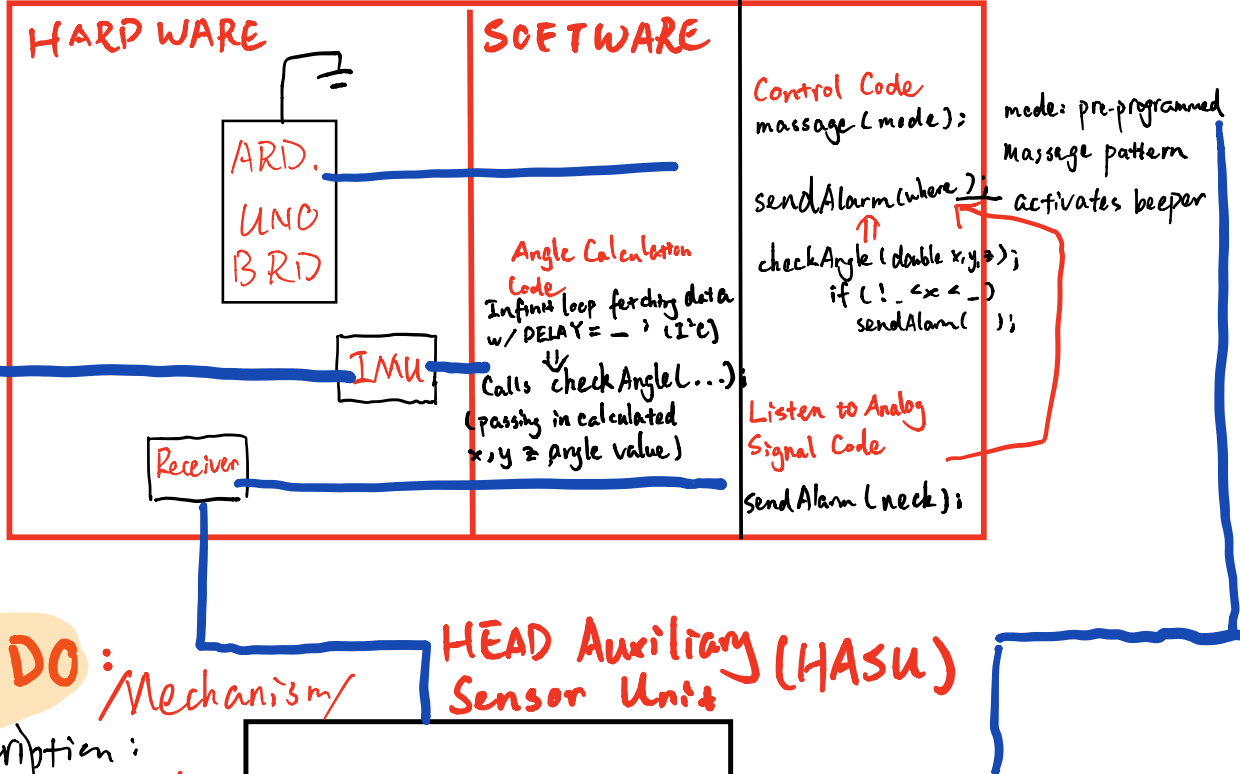

TODO:


Mechanism/

HEAD Auxiliary Sensor Unit (HASU)

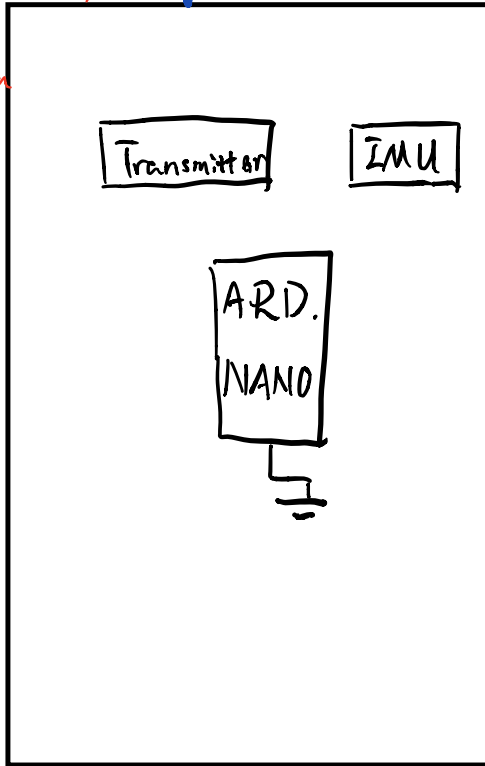


Massager Specs:

TODO:

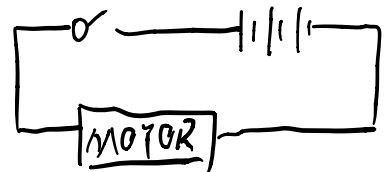

Tranceiver Mechanism / Code

TODO:



ps: we only need analog in/output (0/1)

MPU-6050

Output pin description:

1. ADO: I²C Slave

Address LSB

2. SCL: I²C Serial

Clock

3. SDA: I²C Serial

Data

4. INT: Interrupt
Digital output

5. VDD: Power
Supply Voltage

GND: Ground