1. Description

1.1. Project

Project Name	uart_hub_sonar
Board Name	custom
Generated with:	STM32CubeMX 5.3.0
Date	03/17/2020

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103ZETx
MCU Package	LQFP144
MCU Pin number	144

2. Pinout Configuration
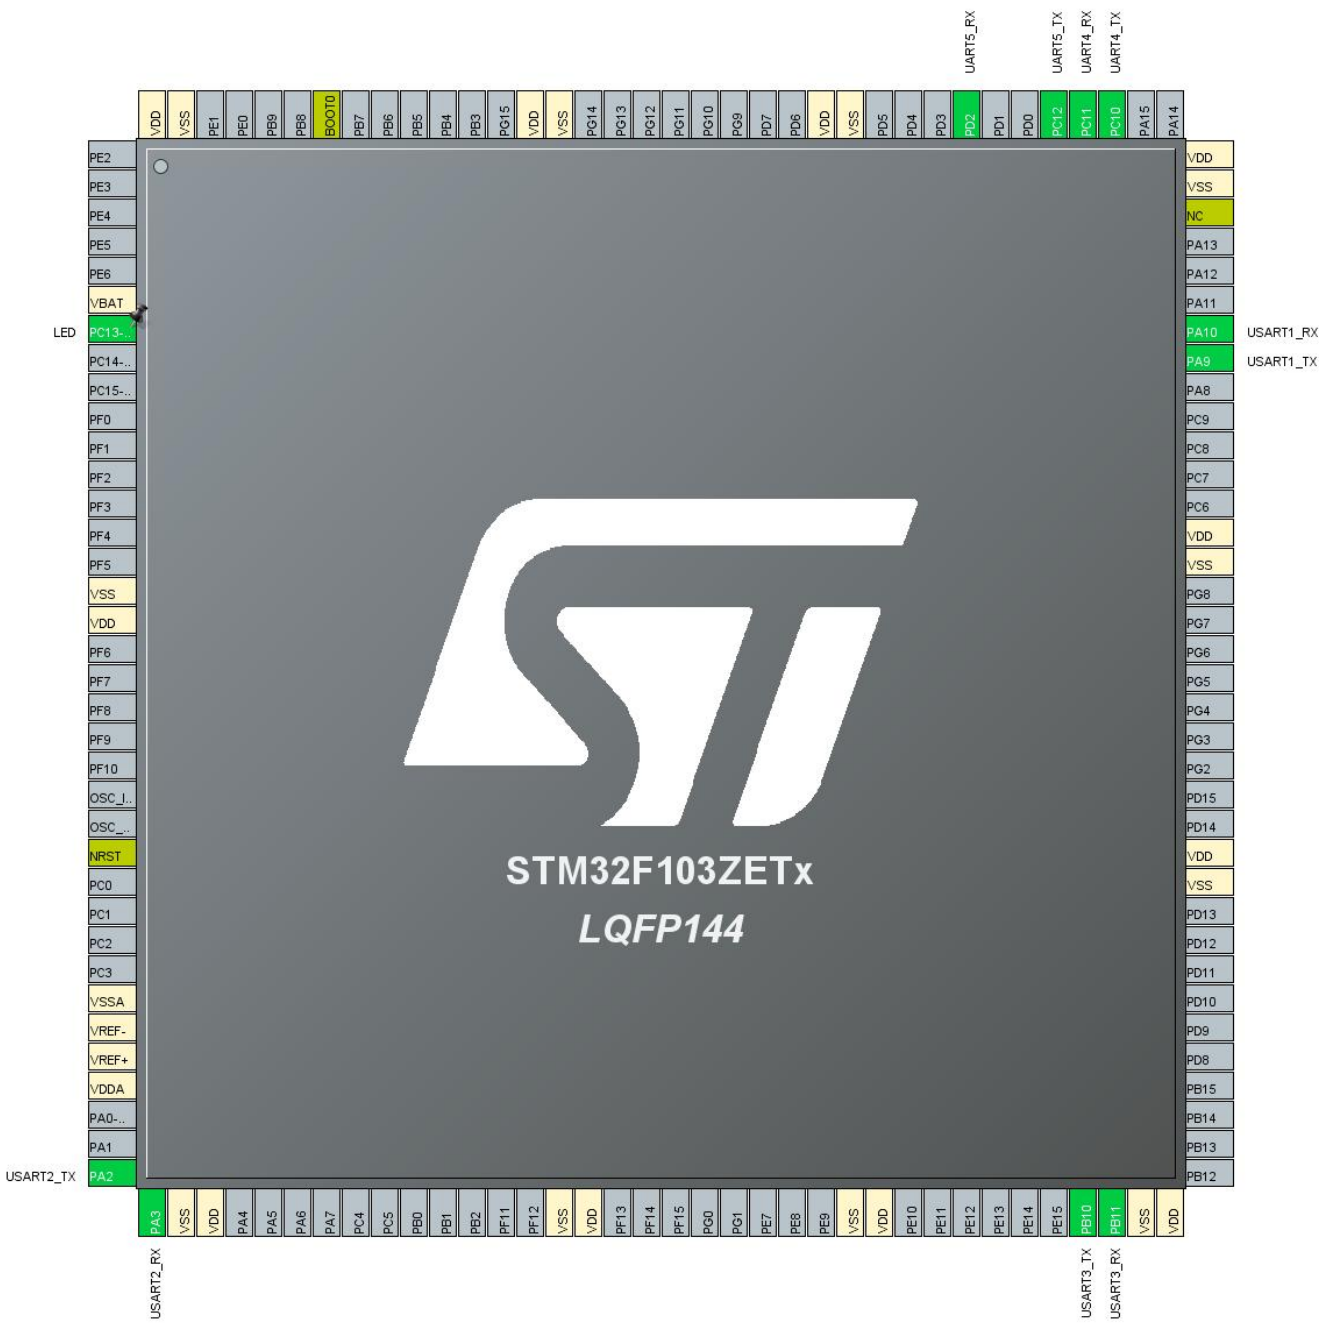
3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
7	PC13-TAMPER-RTC *	I/O	GPIO_Output	LED
16	VSS	Power		
17	VDD	Power		
25	NRST	Reset		
30	VSSA	Power		
31	VREF-	Power		
32	VREF+	Power		
33	VDDA	Power		
36	PA2	I/O	USART2_TX	
37	PA3	I/O	USART2_RX	
38	VSS	Power		
39	VDD	Power		
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		
62	VDD	Power		
69	PB10	I/O	USART3_TX	
70	PB11	I/O	USART3_RX	
71	VSS	Power		
72	VDD	Power		
83	VSS	Power		
84	VDD	Power		
94	VSS	Power		
95	VDD	Power		
101	PA9	I/O	USART1_TX	
102	PA10	I/O	USART1_RX	
106	NC	NC		
107	VSS	Power		
108	VDD	Power		
111	PC10	I/O	UART4_TX	
112	PC11	I/O	UART4_RX	
113	PC12	I/O	UART5_TX	
116	PD2	I/O	UART5_RX	
120	VSS	Power		
121	VDD	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
130	VSS	Power		
131	VDD	Power		
138	BOOT0	Boot		
143	VSS	Power		
144	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration
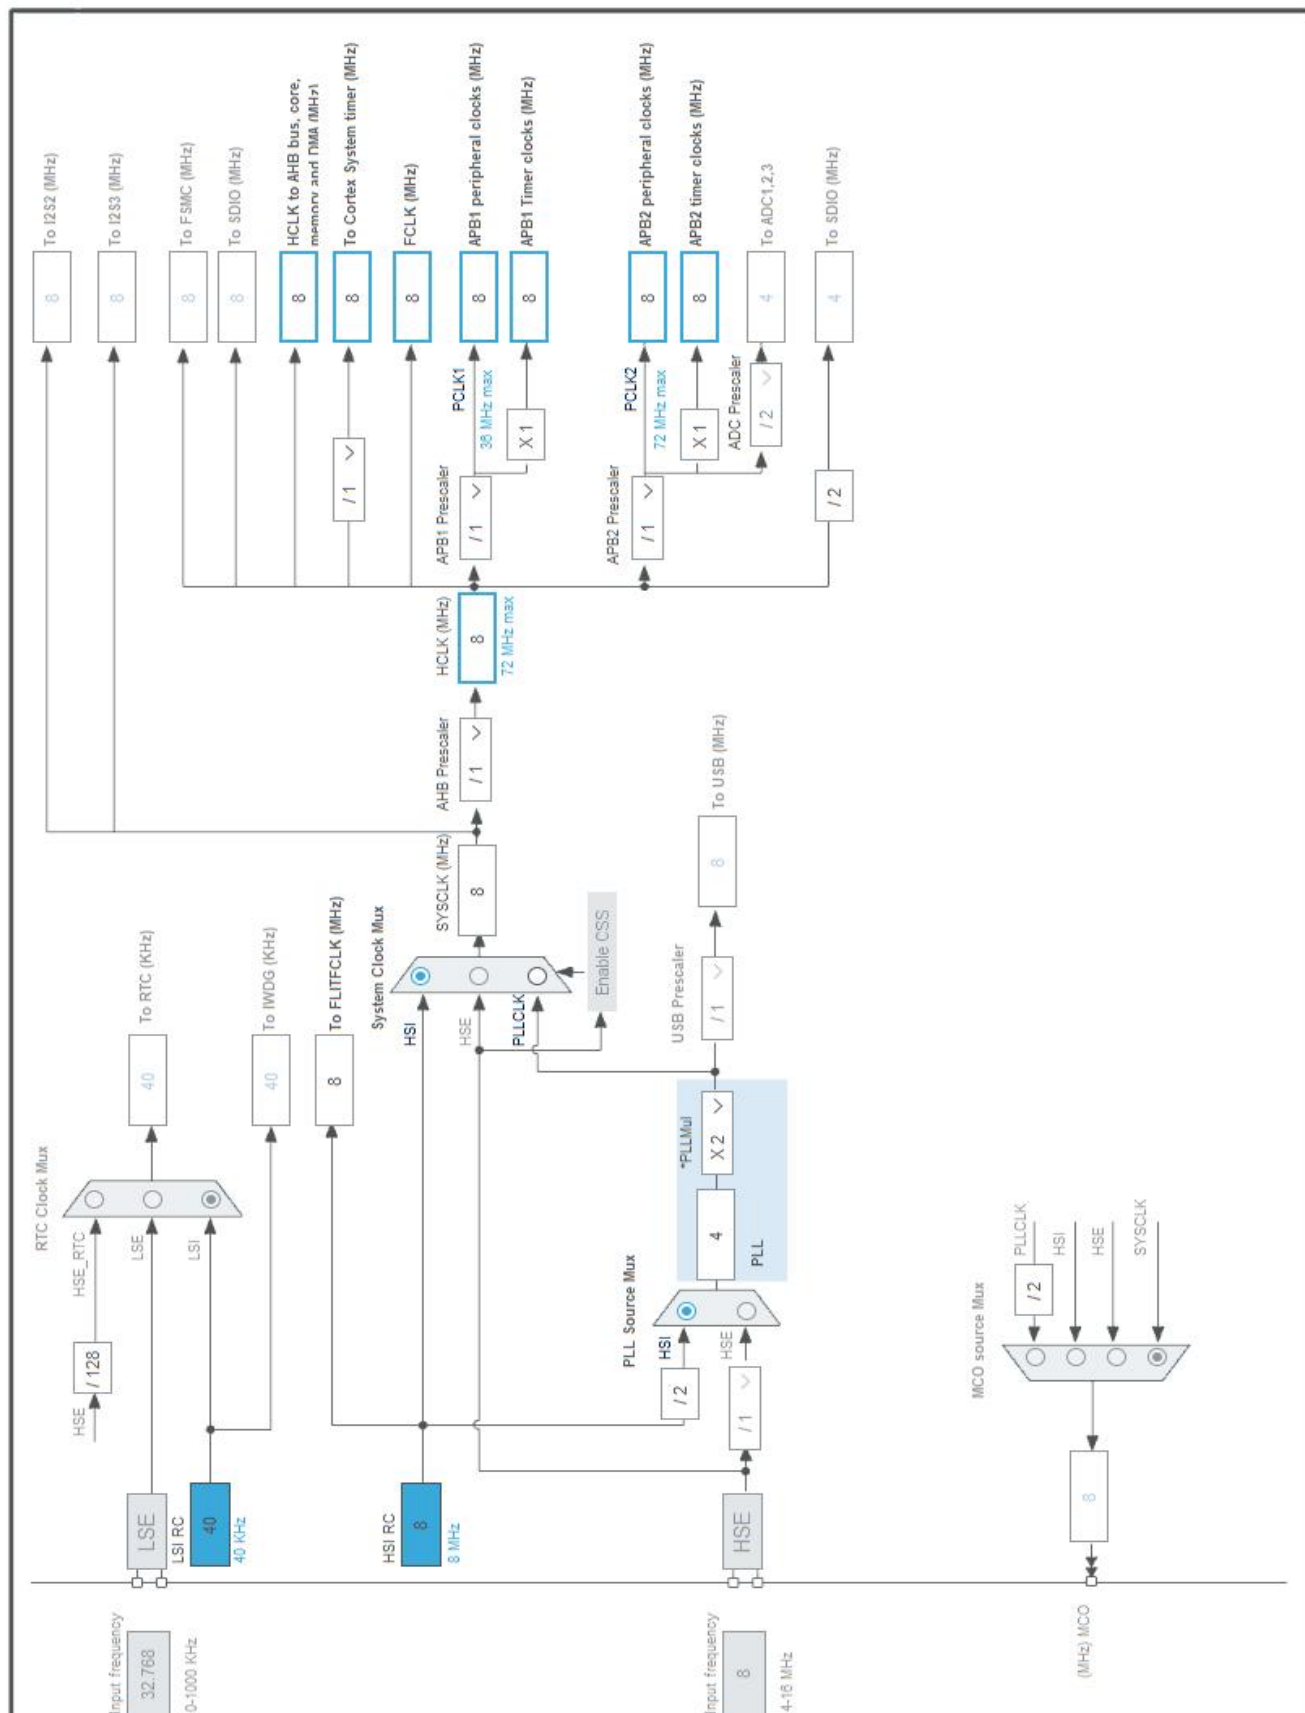
5. Software Project

5.1. Project Settings

Name	Value
Project Name	uart_hub_sonar
Project Folder	E:\uart\uart_hub_sonar
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103ZETx
Datasheet	14611_Rev12

6.2. Parameter Selection

Temperature	25
Vdd	3.3

7. IPs and Middleware Configuration

7.1. RCC

7.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

7.2. SYS

Debug: No Debug
Timebase Source: SysTick

7.3. UART4

Mode: Asynchronous
7.3.1. Parameter Settings:

Basic Parameters:

Baud Rate	**9600 ***
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.4. UART5

Mode: Asynchronous
7.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	**9600 ***
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.5. USART1

Mode: Asynchronous

7.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.6. USART2

Mode: Asynchronous

7.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	**9600 ***
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.7. USART3

Mode: Asynchronous

7.7.1. Parameter Settings:

Basic Parameters:

Baud Rate	**9600 ***
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

* User modified value

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
UART4	PC10	UART4_TX	Alternate Function Push Pull	n/a	**High ***	
	PC11	UART4_RX	Input mode	No pull-up and no pull-down	**n/a**	
UART5	PC12	UART5_TX	Alternate Function Push Pull	n/a	**High ***	
	PD2	UART5_RX	Input mode	No pull-up and no pull-down	**n/a**	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	**High ***	
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	**n/a**	
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	**High ***	
	PA3	USART2_RX	Input mode	No pull-up and no pull-down	**n/a**	
USART3	PB10	USART3_TX	Alternate Function Push Pull	n/a	**High ***	
	PB11	USART3_RX	Input mode	No pull-up and no pull-down	**n/a**	
GPIO	PC13-TAMPER-RTC	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USART2 global interrupt	true	0	0
USART3 global interrupt	true	0	0
UART4 global interrupt	true	0	0
UART5 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART1 global interrupt	unused		

* User modified value

9. Software Pack Report