

The screenshots illustrate the configuration steps for a Cisco Wireless Tri-Band Home Router. The 'Basic Wireless Settings' page shows the network mode set to Auto, the SSID set to HomeSSID, SSID broadcast enabled, standard channel set to 6 - 2.437GHz, and channel bandwidth set to Auto. The 'Wireless Security' page shows the security mode set to WPA2 Personal, encryption set to AES, passphrase set to Cisco123, and key renewal set to 3600 seconds. The 'Administration' page shows the router access settings, including the router password and re-enter to confirm field, and the web access settings, including the web utility access and web utility access via wireless options. The 'Wireless Network Monitor' window shows a list of available wireless networks, including HomeSSID, and site information for the selected network.

```

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 203.0.113.78

Pinging 203.0.113.78 with 32 bytes of data:

Request timed out.
Request timed out.
Reply from 203.0.113.78: bytes=32 time=63ms TTL=64
Reply from 203.0.113.78: bytes=32 time=35ms TTL=64

Ping statistics for 203.0.113.78:
    Packets: Sent = 4, Received = 2, Lost = 2 (50%)
    Approximate round trip times in milli-seconds:
        Minimum = 35ms, Maximum = 63ms, Average = 49ms

C:\>
  
```

Part 1 Configure a Home Wireless Router

Step 1 DHCP

- Router LAN IP : **192.168.6.1**
- Subnet Mask : **255.255.255.224**
- DHCP Server : **Enable**
- Starting IP : **192.168.6.3**

- Maximum Users : **20**
 - Internet Connection : **Automatic Configuration (DHCP)**
 - Static DNS : **10.100.100.252**
-

Step 2 Wireless

- Network Mode : **Auto**
 - SSID : **HomeSSID**
 - Channel : **6**
 - SSID Broadcast : **Enable**
-





Step 3 Security

- Security Mode : **WPA2-Personal**
 - Passphrase : **Cisco123**
 - Router Password : **Cisco123**
-

Step 4 Client

Laptop, Tablet และ Smartphone

- SSID : **HomeSSID**
- Authentication : **WPA2-Personal**
- Password : **Cisco123**

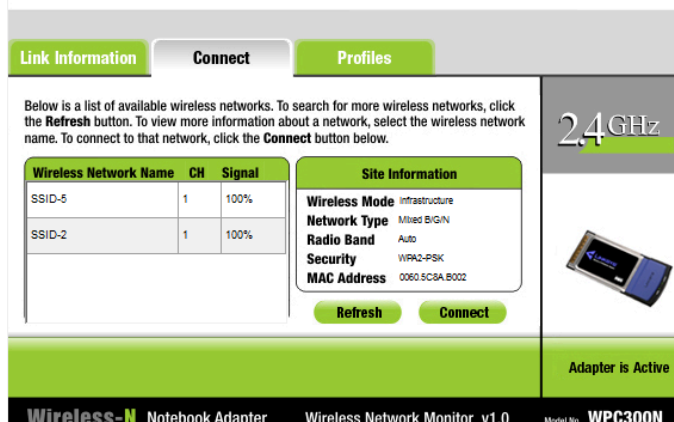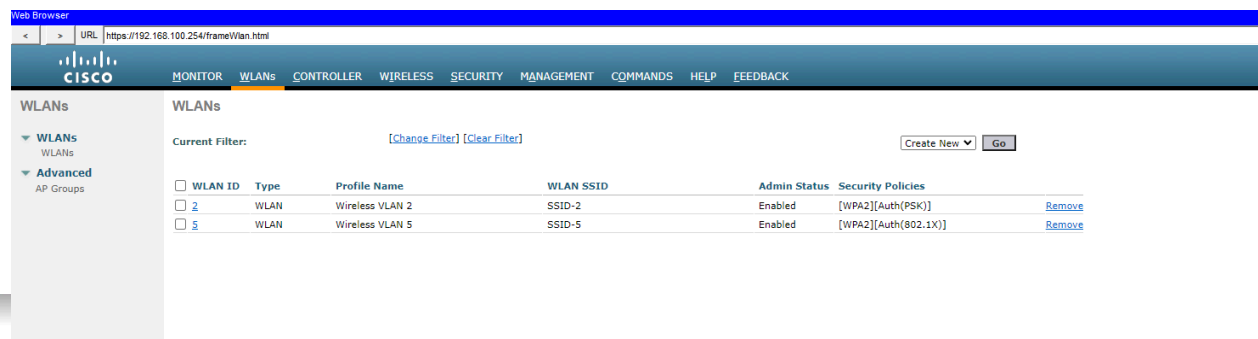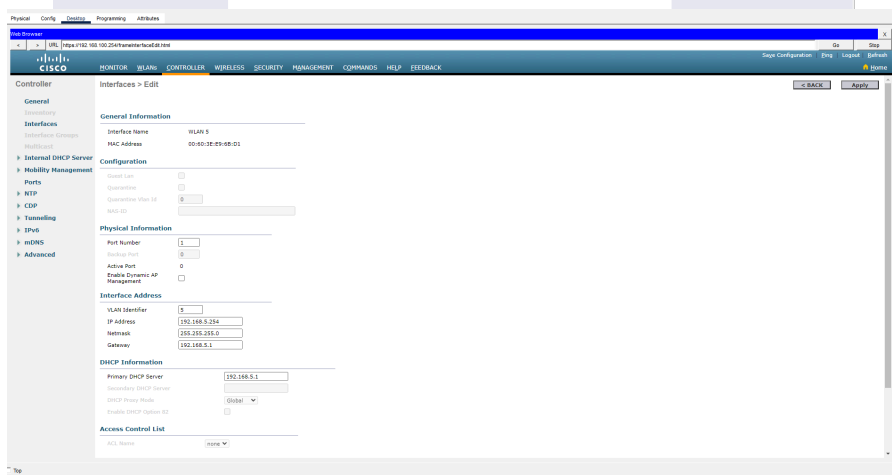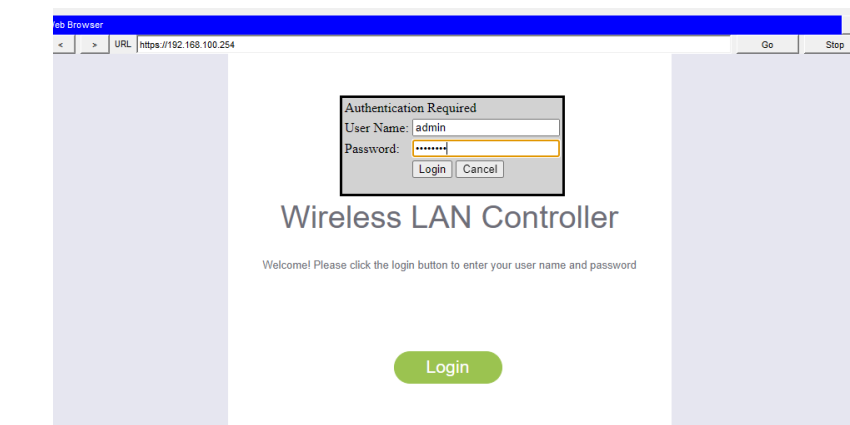

Part 2 Configure WLC

VLAN Interface 2

- Name : **WLAN 2**
 - VLAN : **2**
 - Port : **1**
 - IP Address : **192.168.2.254**
 - Mask : **255.255.255.0**
 - Gateway : **192.168.2.1**
 - DHCP Server : **192.168.2.1**
-

VLAN Interface 5

- Name : **WLAN 5**
 - VLAN : **5**
 - Port : **1**
 - IP Address : **192.168.5.254**
 - Mask : **255.255.255.0**
 - Gateway : **192.168.5.1**
 - DHCP Server : **192.168.5.1**
-

DHCP Scope

- Scope Name : **management**
 - Start Address : **192.168.100.235**
 - End Address : **192.168.100.245**
 - Network : **192.168.100.0**
 - Netmask : **255.255.255.0**
 - Default Router : **192.168.100.1**
-

RADIUS

- Server Index : **1**
 - Server Address : **10.6.0.254**
 - Shared Secret : **RadiusPW**
-

SNMP

- Community : **WLAN**
 - IP Address : **10.6.0.254**
-

WLAN 2

- Profile Name : **Wireless VLAN 2**
 - SSID : **SSID-2**
 - ID : **2**
 - Interface : **WLAN 2**
 - Security : **WPA2-PSK**
 - Passphrase : **Cisco123**
 - FlexConnect Local Switching : **Enable**
 - FlexConnect Local Authentication : **Enable**
-

WLAN 5

- Profile Name : **Wireless VLAN 5**
 - SSID : **SSID-5**
 - ID : **5**
 - Interface : **WLAN 5**
 - Security : **WPA2-Enterprise (802.1X)**
 - Authentication Server : **10.6.0.254**
 - FlexConnect Local Switching : **Enable**
 - FlexConnect Local Authentication : **Enable**
-

Wireless Host 1

- SSID : **SSID-2**

- Security : **WPA2-PSK**
 - Password : **Cisco123**
-

Wireless Host 2

- SSID : **SSID-5**
 - Security : **WPA2-Enterprise**
 - Username : **userWLAN5**
 - Password : **userW5pass**
-

การทดสอบ

ทดสอบด้วยคำสั่ง

None

ping 203.0.113.78

จาก Wireless Host ทั้งสอง

จากนั้นเปิด Web Browser

None

http://203.0.113.78

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 203.0.113.78

Pinging 203.0.113.78 with 32 bytes of data:

Reply from 203.0.113.78: bytes=32 time=77ms TTL=126
Reply from 203.0.113.78: bytes=32 time=46ms TTL=126
Reply from 203.0.113.78: bytes=32 time=25ms TTL=126
Reply from 203.0.113.78: bytes=32 time=50ms TTL=126

Ping statistics for 203.0.113.78:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 25ms, Maximum = 77ms, Average = 49ms

C:\>
```

Question

Verify the address. What address did it receive?

Answer

The Internet interface received an IP address **automatically from the DHCP server**. The exact IP address depends on the Packet Tracer simulation and may vary for each activity.

ผลลัพธ์จากการตั้งค่า

