


Server and Services Project

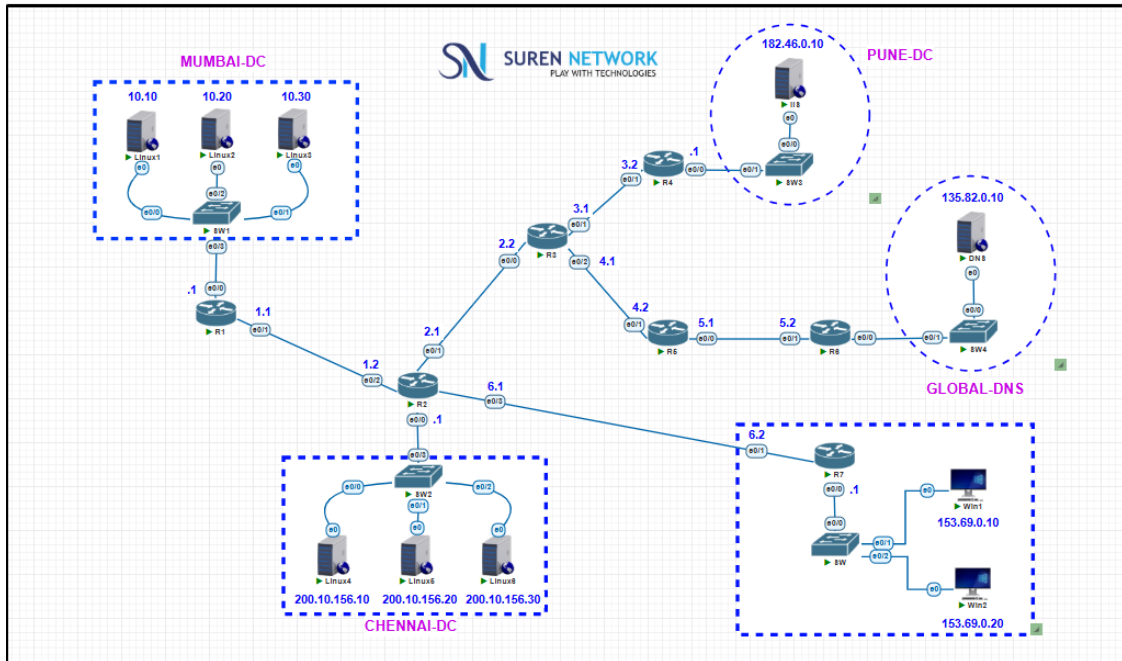

```

R1#show ip interface brief
Interface IP-Address OK? Method Status Prot
Ethernet0/0 10.0.0.1 YES NVRAM up up
Ethernet0/1 1.0.0.1 YES NVRAM up up
Ethernet0/2 unassigned YES NVRAM up up
Ethernet0/3 unassigned YES NVRAM up up

R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       O - OSPF, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - OGM, P - periodic downloaded static route, H - NHRP, I - IGRP
       * - replication route, % - next hop override, p - overrides from FIR
       + - replicated route, % - next hop override, p - overrides from FIR

Gateway of last resort is not set

1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 1.0.0.0/8 is directly connected, Ethernet0/1
L 1.0.0.1/32 is directly connected, Ethernet0/1
S 2.0.0.0/8 [1/0] via 1.0.0.2
S 3.0.0.0/8 [1/0] via 1.0.0.2
S 4.0.0.0/8 [1/0] via 1.0.0.2
S 5.0.0.0/8 [1/0] via 1.0.0.2
S 6.0.0.0/8 [1/0] via 1.0.0.2
L 10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.0.0.0/8 is directly connected, Ethernet0/0
L 10.0.0.1/32 is directly connected, Ethernet0/0
S 135.82.0.0/16 [1/0] via 1.0.0.2
S 153.69.0.0/16 [1/0] via 1.0.0.2
S 182.46.0.0/16 [1/0] via 1.0.0.2
S 200.10.156.0/24 [1/0] via 1.0.0.2

R2#show ip interface brief
Interface IP-Address OK? Method Status Prot
Ethernet0/0 200.10.156.1 YES NVRAM up up
Ethernet0/1 2.0.0.1 YES NVRAM up up
Ethernet0/2 1.0.0.2 YES NVRAM up up
Ethernet0/3 6.0.0.1 YES NVRAM up up

R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       O - OSPF, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       I - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - OGM, P - periodic downloaded static route, H - NHRP, I - IGRP
       * - replication route, % - next hop override, p - overrides from FIR
       + - replicated route, % - next hop override, p - overrides from FIR

Gateway of last resort is not set

1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 1.0.0.0/8 is directly connected, Ethernet0/2
L 1.0.0.2/32 is directly connected, Ethernet0/2
S 2.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 2.0.0.0/8 is directly connected, Ethernet0/1
L 2.0.0.1/32 is directly connected, Ethernet0/1
S 3.0.0.0/8 [1/0] via 2.0.0.2
S 4.0.0.0/8 [1/0] via 2.0.0.2
S 5.0.0.0/8 [1/0] via 2.0.0.2
S 6.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 6.0.0.0/8 is directly connected, Ethernet0/3
L 6.0.0.1/32 is directly connected, Ethernet0/3
S 10.0.0.0/8 [1/0] via 1.0.0.1
S 135.82.0.0/16 [1/0] via 2.0.0.2
S 153.69.0.0/16 [1/0] via 2.0.0.2
S 182.46.0.0/16 [1/0] via 2.0.0.2
S 200.10.156.0/24 is variably subnetted, 2 subnets, 2 masks
C 200.10.156.0/24 is directly connected, Ethernet0/0
L 200.10.156.1/32 is directly connected, Ethernet0/0

```

```
show ip interface brief
Interface IP-Address OK? Method Status Prot
Loopback0 10.0.0.1 YES NVRAM up
Ethernet0/0 2.0.0.2 YES NVRAM up
Ethernet0/1 3.0.0.1 YES NVRAM up
Ethernet0/2 4.0.0.1 YES NVRAM up
Ethernet0/3 unassigned YES NVRAM up

show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
I - IS-IS, su - IS-IS summary, LI - IS-IS level-1, L2 - IS-IS level-2
Ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, I - IISP
A - application route
* - replicated route, % - next hop override, p - overrides from PBR

Gateway of last resort is not set

0 1.0.0.0/8 [1/0] via 2.0.0.1
0 2.0.0.0/8 [1/0] via 3.0.0.1
C 2.0.0.0/8 is directly connected, Ethernet0/0
L 2.0.0.2/32 is directly connected, Ethernet0/0
0 3.0.0.0/8 [1/0] via 3.0.0.1
C 3.0.0.0/8 is directly connected, Ethernet0/1
C 3.0.0.1/32 is directly connected, Ethernet0/1
0 4.0.0.0/8 [1/0] via 4.0.0.1
C 4.0.0.0/8 is directly connected, Ethernet0/2
L 4.0.0.1/32 is directly connected, Ethernet0/2
0 5.0.0.0/8 [1/0] via 5.0.0.1
0 6.0.0.0/8 [1/0] via 5.0.0.1
0 10.0.0.0/8 [1/0] via 5.0.0.1
0 133.49.0.0/16 [1/0] via 5.0.0.1
0 153.49.0.0/16 [1/0] via 5.0.0.1
0 182.46.0.0/16 [1/0] via 5.0.0.1
0 200.10.156.0/24 [1/0] via 5.0.0.1

show ip interface brief
Interface IP-Address OK? Method Status Prot
Loopback0 10.0.0.1 YES NVRAM up
Ethernet0/0 102.46.0.1 YES NVRAM up
Ethernet0/1 3.0.0.2 YES NVRAM up
Ethernet0/2 unassigned YES NVRAM up
Ethernet0/3 unassigned YES NVRAM up

show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
I - IS-IS, su - IS-IS summary, LI - IS-IS level-1, L2 - IS-IS level-2
Ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, I - IISP
A - application route
* - replicated route, % - next hop override, p - overrides from PBR

Gateway of last resort is not set

0 1.0.0.0/8 [1/0] via 3.0.0.1
0 2.0.0.0/8 [1/0] via 3.0.0.1
0 3.0.0.0/8 [1/0] via 3.0.0.1
C 3.0.0.2/32 is directly connected, Ethernet0/1
0 4.0.0.0/8 [1/0] via 3.0.0.1
0 5.0.0.0/8 [1/0] via 3.0.0.1
0 6.0.0.0/8 [1/0] via 3.0.0.1
0 10.0.0.0/8 [1/0] via 3.0.0.1
0 133.49.0.0/16 [1/0] via 3.0.0.1
0 153.49.0.0/16 [1/0] via 3.0.0.1
0 182.46.0.0/16 [1/0] via 3.0.0.1
0 200.10.156.0/24 [1/0] via 3.0.0.1
```

```
show ip interface brief
Interface IP-Address OK? Method Status Prot
Loopback0 5.0.0.1 YES NVRAM up
Ethernet0/0 4.0.0.2 YES NVRAM up
Ethernet0/1 unassigned YES NVRAM up
Ethernet0/2 unassigned YES NVRAM up
Ethernet0/3 unassigned YES NVRAM up

show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
I - IS-IS, su - IS-IS summary, LI - IS-IS level-1, L2 - IS-IS level-2
Ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, I - IISP
A - application route
* - replicated route, % - next hop override, p - overrides from PBR

Gateway of last resort is not set

0 1.0.0.0/8 [1/0] via 4.0.0.1
0 2.0.0.0/8 [1/0] via 4.0.0.1
0 3.0.0.0/8 [1/0] via 4.0.0.1
C 4.0.0.2/32 is directly connected, Ethernet0/0
L 4.0.0.2/32 is directly connected, Ethernet0/0
0 5.0.0.0/8 [1/0] via 4.0.0.1
C 5.0.0.0/8 is directly connected, Ethernet0/1
0 6.0.0.0/8 [1/0] via 4.0.0.1
0 10.0.0.0/8 [1/0] via 4.0.0.1
0 133.49.0.0/16 [1/0] via 4.0.0.1
0 153.49.0.0/16 [1/0] via 4.0.0.1
0 182.46.0.0/16 [1/0] via 4.0.0.1
0 200.10.156.0/24 [1/0] via 4.0.0.1

show ip interface brief
Interface IP-Address OK? Method Status Prot
Loopback0 133.49.0.1 YES NVRAM up
Ethernet0/0 5.0.0.2 YES NVRAM up
Ethernet0/1 4.0.0.2 YES NVRAM up
Ethernet0/2 unassigned YES NVRAM up
Ethernet0/3 unassigned YES NVRAM up

show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
I - IS-IS, su - IS-IS summary, LI - IS-IS level-1, L2 - IS-IS level-2
Ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, I - IISP
A - application route
* - replicated route, % - next hop override, p - overrides from PBR

Gateway of last resort is not set

0 1.0.0.0/8 [1/0] via 4.0.0.1
0 2.0.0.0/8 [1/0] via 4.0.0.1
0 3.0.0.0/8 [1/0] via 4.0.0.1
C 4.0.0.2/32 is directly connected, Ethernet0/1
L 4.0.0.2/32 is directly connected, Ethernet0/1
0 5.0.0.0/8 [1/0] via 4.0.0.1
C 5.0.0.0/8 is directly connected, Ethernet0/0
0 6.0.0.0/8 [1/0] via 4.0.0.1
0 10.0.0.0/8 [1/0] via 4.0.0.1
0 133.49.0.0/16 [1/0] via 4.0.0.1
0 153.49.0.0/16 [1/0] via 4.0.0.1
0 182.46.0.0/16 [1/0] via 4.0.0.1
0 200.10.156.0/24 [1/0] via 4.0.0.1
```

