

1. General Description

The EM74LVC1G125 is a single buffer/line driver with 3-state output. Inputs can be driven from either 3.3 V or 5 V devices. This feature allows the use of these devices as translators in mixed 3.3 V and 5 V environments.

Schmitt-trigger action at all inputs makes the circuit tolerant of slower input rise and fall times.

This device is fully specified for partial power down applications using I_{OFF} . The I_{OFF} circuitry disables the output, preventing the potentially damaging backflow current through the device when it is powered down.

2. Features and Benefits

- Wide supply voltage range from 1.65 V to 5.5 V
- Overvoltage tolerant inputs to 5.5 V
- High noise immunity
- CMOS low power dissipation
- I_{OFF} circuitry provides partial Power-down mode operation
- ± 24 mA output drive ($V_{CC} = 3.0$ V)
- Latch-up performance exceeds 100 mA
- Direct interface with TTL levels
- Complies with JEDEC standard:
 - JESD8-7 (1.65 V to 1.95 V)
 - JESD8-5 (2.3 V to 2.7 V)
 - JESD8C (2.7 V to 3.6 V)
 - JESD36 (4.5 V to 5.5 V)
- ESD protection:
 - HBM ANSI/ESDA/JEDEC JS-001 Class 3B exceeds 8000 V
 - MM JESD22-A115C Class C exceeds 550 V
 - CDM ANSI/ESDA/JEDEC JS-002 Class C3 exceeds 2000 V

■ Multiple package options


3. Ordering Information

Table 1. Ordering information


Type number	Topside marking	Package Name	Description	Quantity
EM74LVC1G125GV	VPYW	SOT23-5L	SOT23 package, 5 pins 2.92 mm × 1.6 mm; 1.25 mm (Max) height	3000
EM74LVC1G125GW	VPYW	SOT353	SOT353 package, 5 pins 2.1 mm × 1.25 mm; 1.1 mm (Max) height	3000
EM74LVC1G125GS	VP	DFN1x1-6L	DFN1×1 package, 6 pins 1 mm × 1 mm; 0.42 mm (Max) height	3000
EM74LVC1G125GM	VPYW	DFN1x1.45-6L	DFN1.45×1 package, 6 pins 1.45 mm × 1 mm; 0.6 mm (Max) height	3000
EM74LVC1G125GX	VP	DFN0.8x0.8-5L	DFN0.8×0.8 package, 5pins 0.8 mm × 0.8 mm; 0.4 mm (Max) height	3000

MARKING INFORMATION

NOTE: YW = Date Code.






4. Function Diagram

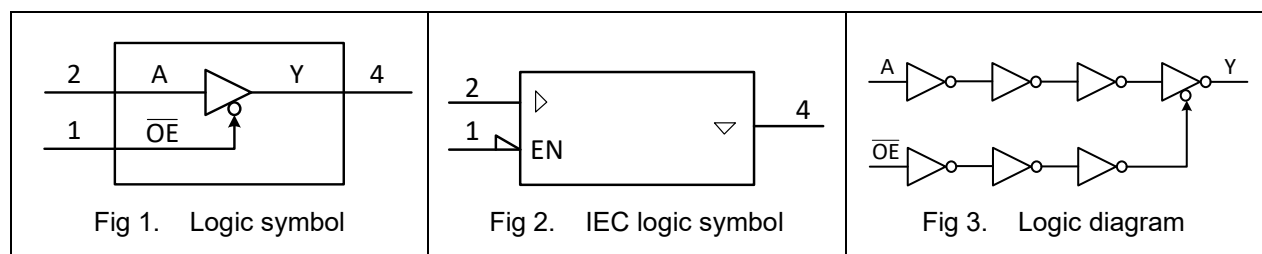

5. Pinning Information

5.1. Pin map

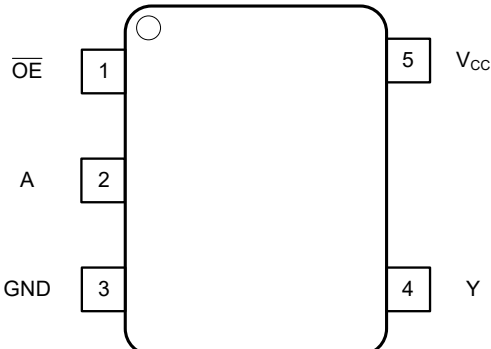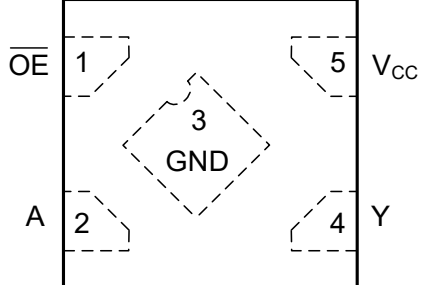 Fig 4. Top view pin configuration SOT23-5 and SOT353	 Fig 5. Top view pin configuration DFN6L
 Fig 6. Top view pin configuration DFN5L	

EM74LVC1G125

Bus buffer/line driver; 3-state

5.2. Pin description

Table 2. Pin description

Symbol	Pin		Description
	SOT23-5, SOT353 and DFN5L	DFN6L	
$\overline{\text{OE}}$	1	1	Output enable input
A	2	2	Data input
GND	3	3	Ground (0V)
Y	4	4	Data output
NC	-	5	Not connected
V _{CC}	5	6	Supply voltage

6. Functional Description

Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance OFF-state.

Input		Output
$\overline{\text{OE}}$	A	Y
L	L	L
L	H	H
H	X	Z

7. Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Table 4. Absolute Maximum Ratings

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND.

Symbol	Parameter	Conditions	Min	Max	Unit
V _{CC}	supply voltage		-0.5	6.5	V
I _{IK}	input clamping current	V _I < 0 V	-50		mA
V _I	input voltage	[1]	-0.5	6.5	V
I _{OK}	output clamping current	V _O > V _{CC} or V _O < 0 V		±50	mA

EM74LVC1G125

Bus buffer/line driver; 3-state

V _O	output voltage	Active mode [1]	-0.5	V _{CC} + 0.5	V
		Power-down mode; V _{CC} = 0 V [1]	-0.5	6.5	V
I _O	output current	V _O = 0 V to V _{CC}		±50	mA
I _{CC}	supply current			100	mA
I _{GND}	ground current		-100		mA
P _{tot}	total power dissipation	T _{amb} = -40 °C to + 125 °C		250	mW
T _{stg}	storage temperature		-65	150	°C

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

8. Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. EnergyMath does not recommend exceeding them or designing to Absolute Maximum Ratings.

Table 5. Recommended Operating Conditions

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{CC}	supply voltage		1.65		5.5	V
V _I	input voltage		0		5.5	V
V _O	output voltage	Active mode	0		V _{CC}	V
		Power-down mode; V _{CC} = 0 V	0		5.5	V
T _{amb}	ambient temperature		-40		125	°C
Δt/ΔV	Input transition rise and fall rate	V _{CC} = 1.65 V to 2.7 V			20	ns/V
		V _{CC} = 2.7 V to 5.5 V			10	ns/V

9.Static Characteristics

Table 6. Static characteristics

At recommended operating conditions. Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	-40 °C to +85 °C			-40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	
V_{IH}	HIGH-level input voltage	$V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$	$0.65V_{CC}$			$0.65V_{CC}$		V
		$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.7			1.7		V
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$	2.0			2.0		V
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	$0.7V_{CC}$			$0.7V_{CC}$		V
V_{IL}	LOW-level input voltage	$V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$			$0.35V_{CC}$		$0.35V_{CC}$	V
		$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$			0.7		0.7	V
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$			0.8		0.8	V
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$			$0.3V_{CC}$		$0.3V_{CC}$	V
V_{OH}	HIGH-level output voltage	$V_I = V_{IH} \text{ or } V_{IL}$						
		$I_O = -100\mu\text{A}; V_{CC} = 1.65 \text{ V to } 5.5 \text{ V}$	$V_{CC} - 0.1$			$V_{CC} - 0.1$		V
		$I_O = -4 \text{ mA}; V_{CC} = 1.65 \text{ V}$	1.2			0.95		V
		$I_O = -8 \text{ mA}; V_{CC} = 2.3 \text{ V}$	1.9			1.7		V
		$I_O = -12 \text{ mA}; V_{CC} = 2.7 \text{ V}$	2.2			1.9		V
		$I_O = -24 \text{ mA}; V_{CC} = 3.0 \text{ V}$	2.3			2.0		V
		$I_O = -32 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.8			3.4		V
V_{OL}	LOW-level output voltage	$V_I = V_{IH} \text{ or } V_{IL}$						
		$I_O = 100\mu\text{A}; V_{CC} = 1.65 \text{ V to } 5.5 \text{ V}$			0.10		0.10	V
		$I_O = 4 \text{ mA}; V_{CC} = 1.65 \text{ V}$			0.45		0.70	V
		$I_O = 8 \text{ mA}; V_{CC} = 2.3 \text{ V}$			0.30		0.45	V
		$I_O = 12 \text{ mA}; V_{CC} = 2.7 \text{ V}$			0.40		0.60	V
		$I_O = 24 \text{ mA}; V_{CC} = 3.0 \text{ V}$			0.55		0.80	V
		$I_O = 32 \text{ mA}; V_{CC} = 4.5 \text{ V}$			0.55		0.80	V
I_I	Input leakage current	$V_I = 5.5 \text{ V or GND}; V_{CC} = 0 \text{ V to } 5.5 \text{ V}$		± 0.1	± 1		± 1	μA

EM74LVC1G125

Bus buffer/line driver; 3-state

Symbol	Parameter	Conditions	-40 °C to +85 °C			-40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	
I_{OZ}	OFF-state output current	$V_{CC} = 3.6 \text{ V}$; $V_I = V_{IH}$ or V_{IL} ; $V_O = 5.5 \text{ V}$ or GND		± 0.1	± 2		± 2	μA
I_{OFF}	power-off leakage current	$V_{CC} = 0 \text{ V}$; V_I or $V_O = 5.5 \text{ V}$		± 0.1	± 2		± 2	μA
I_{CC}	supply current	$V_I = 5.5 \text{ V}$ or GND; $I_O = 0 \text{ A}$; $V_{CC} = 1.65 \text{ V}$ to 5.5 V		0.1	4		4	μA
ΔI_{CC}	additional supply current	per pin; $V_{CC} = 2.3 \text{ V}$ to 5.5 V ; $V_I = V_{CC} - 0.6 \text{ V}$; $I_O = 0 \text{ A}$		5	500		500	μA
C_I	input capacitance	$V_{CC} = 3.3 \text{ V}$; $V_I = \text{GND}$ to V_{CC}		5				pF

[1] All typical values are measured at $V_{CC} = 3.3 \text{ V}$ and $T_{amb} = 25^\circ\text{C}$.

10. Dynamic Characteristics

Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 9.

Symbol	Parameter	Conditions	-40 °C to +85 °C			-40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	
t_{pd}	propagation delay	A to Y; see Fig. 7 [2]						
		$V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$	2.8	8.1	14.1	2.8	14.5	ns
		$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.8	4.8	7.3	1.8	7.6	ns
		$V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$	1.4	3.6	5.3	1.4	5.6	ns
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	1.1	2.6	3.6	1.1	3.8	ns
t_{en}	enable time	$\overline{OE}$ to Y; see Fig. 8 [3]						
		$V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$	2.5	7.5	12.2	2.5	12.5	ns
		$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.6	4.4	6.6	1.6	6.9	ns
		$V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$	1.3	3.8	5.2	1.3	5.5	ns
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	1.1	2.4	3.4	1.1	3.7	ns
t_{dis}	disable time	$\overline{OE}$ to Y; see Fig. 8 [4]						
		$V_{CC} = 1.65 \text{ V to } 1.95 \text{ V}$	4.1	7.4	14.6	4.1	14.9	ns
		$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	2.9	5.6	10.3	2.9	10.5	ns
		$V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$	2.2	4.3	7.6	2.2	7.8	ns
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	1.7	4.0	5.0	1.7	5.2	ns
C_{PD}	power dissipation capacitance	per buffer; $V_I = \text{GND to } V_{CC}$ [5]						
		output enabled		24				pF
		output disabled		0.8				pF

[1] Typical values are measured at $T_{amb} = 25 \text{ °C}$ and $V_{CC} = 1.8 \text{ V}, 2.5 \text{ V}, 3.3 \text{ V}$ and 5.0 V respectively.

[2] t_{pd} is the same as t_{PLH} and t_{PHL} .

[3] t_{en} is the same as t_{PZH} and t_{PZL} .

[4] t_{dis} is the same as t_{PLZ} and t_{PHZ} .

[5] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$ where:

f_i = input frequency in MHz;

f_o = output frequency in MHz;


C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.


10.1. Waveforms and test circuit

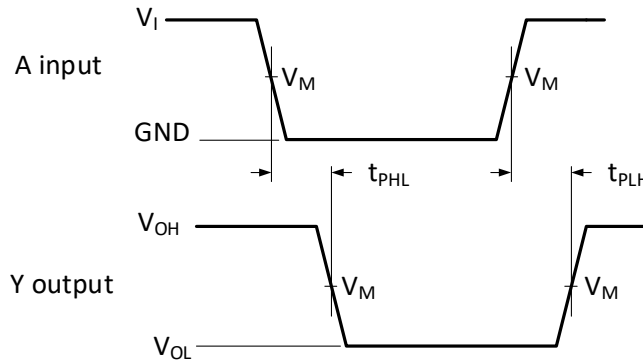

Measurement points are given in Table 8.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig 7. The input A to output Y propagation delays

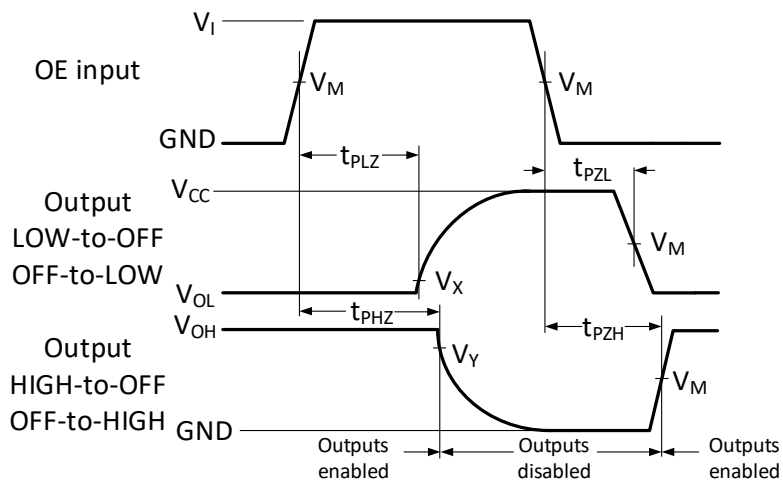

Measurement points are given in Table 8.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig 8. 3-state enable and disable times

EM74LVC1G125

Bus buffer/line driver; 3-state

Table 8. Measurement points

Supply voltage	Input	Output		
V_{CC}	V_M	V_M	V_X	V_Y
1.65 V to 1.95 V	$0.5V_{CC}$	$0.5V_{CC}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
2.3 V to 2.7 V	$0.5V_{CC}$	$0.5V_{CC}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
3.0 V to 3.6 V	1.5 V	1.5 V	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$
4.5 V to 5.5 V	$0.5V_{CC}$	$0.5V_{CC}$	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$


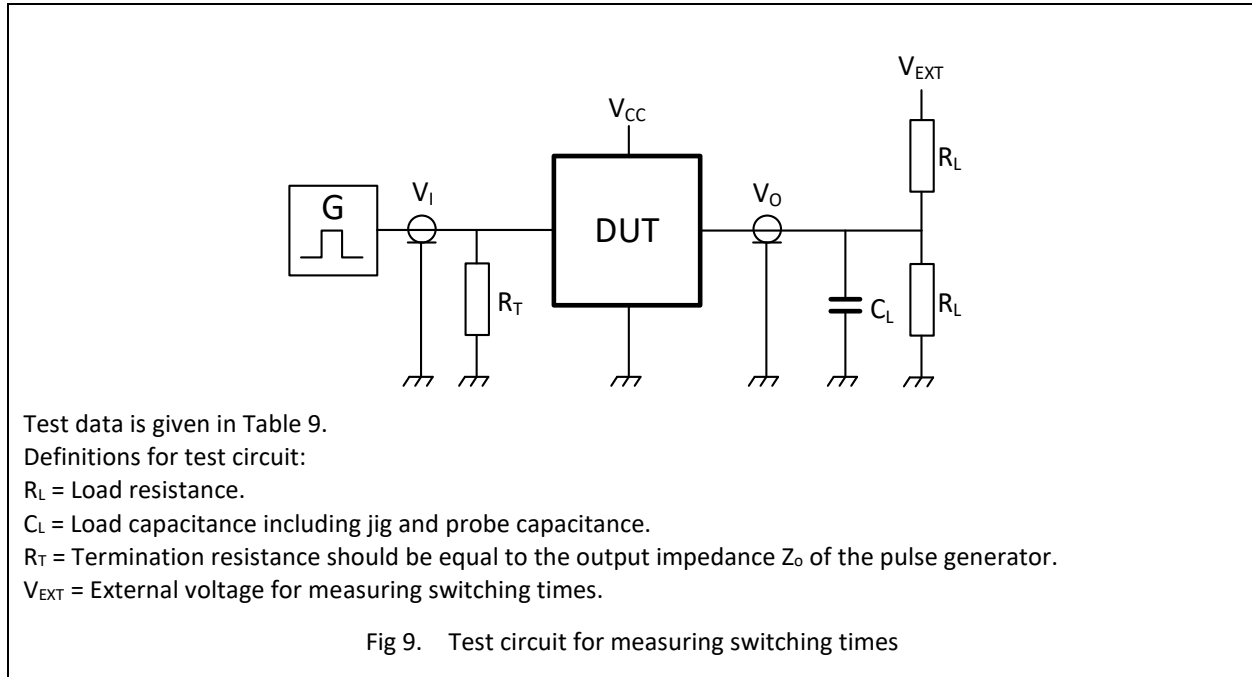


Table 9. Test data

Supply voltage	Input		Load		V_{EXT}		
V_{CC}	V_I	$t_r = t_f$	C_L	R_L	t_{PLH}, t_{PHL}	t_{PZH}, t_{PHZ}	t_{PZL}, t_{PLZ}
1.65 V to 1.95 V	V_{CC}	≤ 2.0 ns	30 pF	1 k Ω	open	GND	$2 \times V_{CC}$
2.3 V to 2.7 V	V_{CC}	≤ 2.0 ns	30 pF	500 Ω	open	GND	$2 \times V_{CC}$
3.0 V to 3.6 V	3 V	≤ 2.5 ns	50 pF	500 Ω	open	GND	6V
4.5 V to 5.5 V	V_{CC}	≤ 2.5 ns	50 pF	500 Ω	open	GND	$2 \times V_{CC}$

11. Package Outline

SOT23-5L

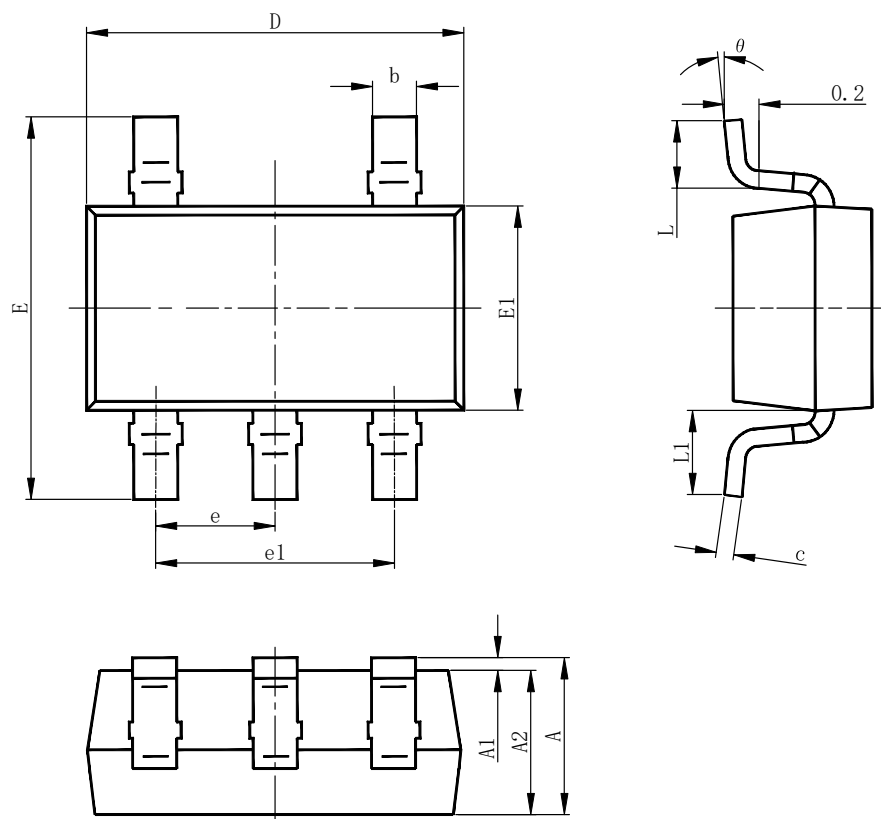


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
L1	0.600REF.		0.024REF.	
θ	0°	8°	0°	8°

EM74LVC1G125

Bus buffer/line driver; 3-state

SOT353

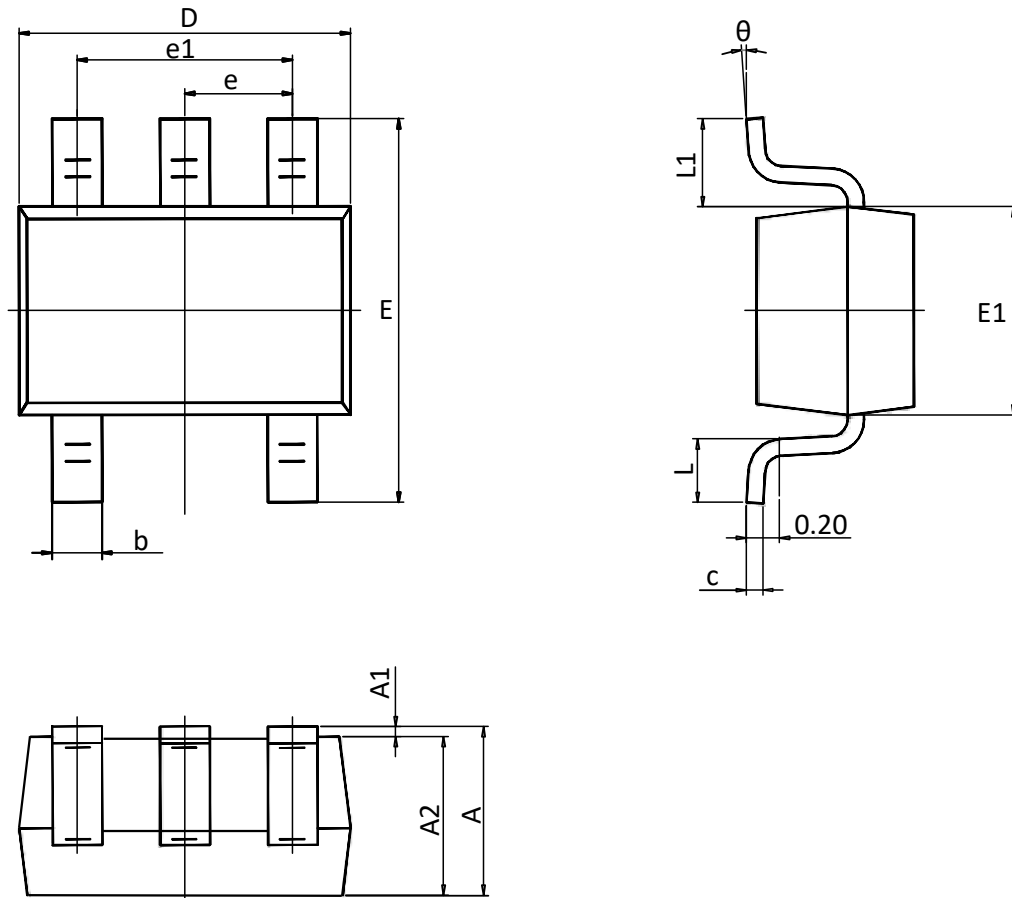


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.110	0.175	0.004	0.007
D	2.000	2.200	0.079	0.087
E	2.150	2.450	0.085	0.096
E1	1.150	1.350	0.045	0.053
e	0.650 TYP.		0.026 TYP.	
e1	1.200	1.400	0.047	0.055
L	0.260	0.460	0.010	0.018
L1	0.525 REF.		0.021 REF.	
θ	0°	8°	0°	8°

EM74LVC1G125

Bus buffer/line driver; 3-state

DFN1x1-6L

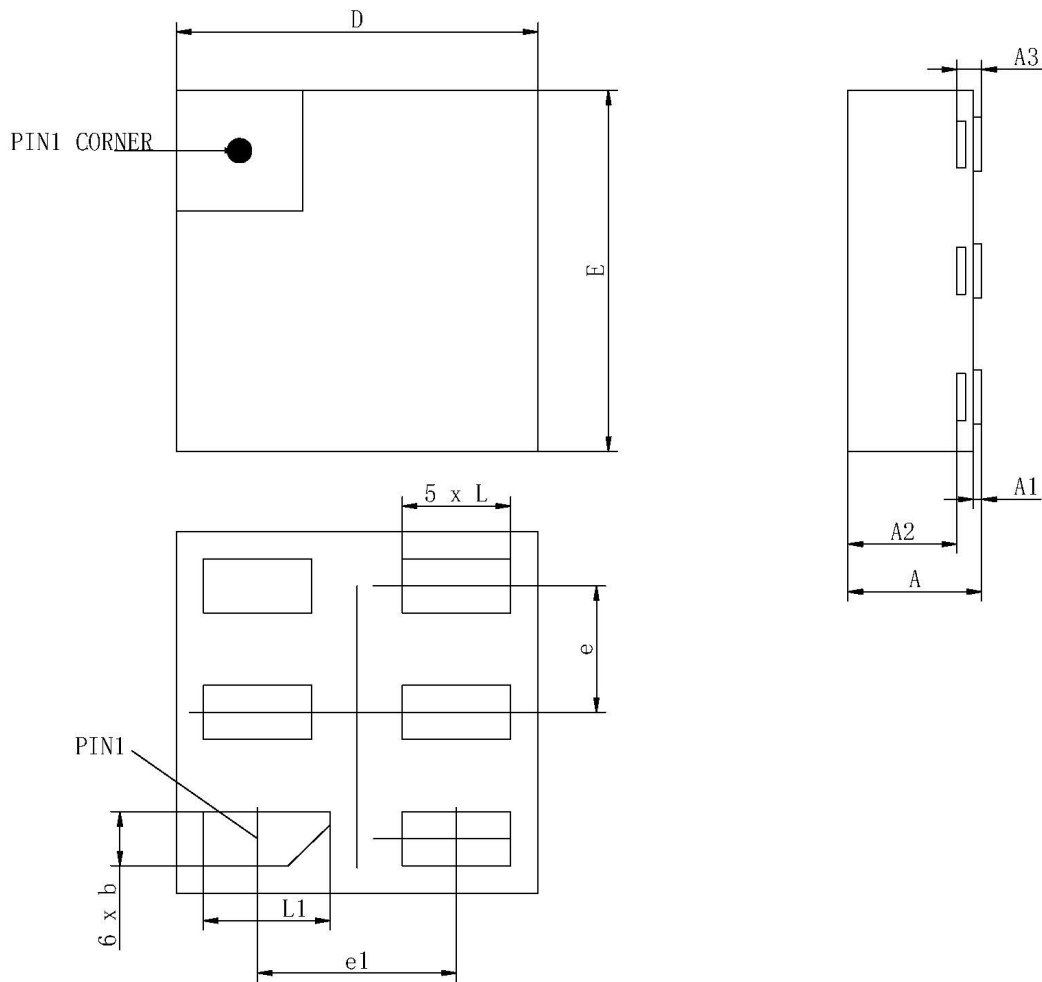


	SYMBOL	MIN	NOM	MAX
TOTAL THICKNESS	A	0.32	0.37	0.42
STAND OFF	A1	0	0.02	0.05
MOLD THICKNESS	A2	---	0.27	---
L/F THICKNESS	A3		0.102 REF	
BODY SIZE	X	D	1.00 BSC	
	Y	E	1.00 BSC	
LEAD WIDTH	b	0.10	0.15	0.20
LEAD PITCH	e		0.35 BSC	
	e1		0.55 BSC	
LEAD LENGTH	L	0.25	0.30	0.35
	L1	0.30	0.35	0.40

EM74LVC1G125

Bus buffer/line driver; 3-state

DFN1x1.45-6L

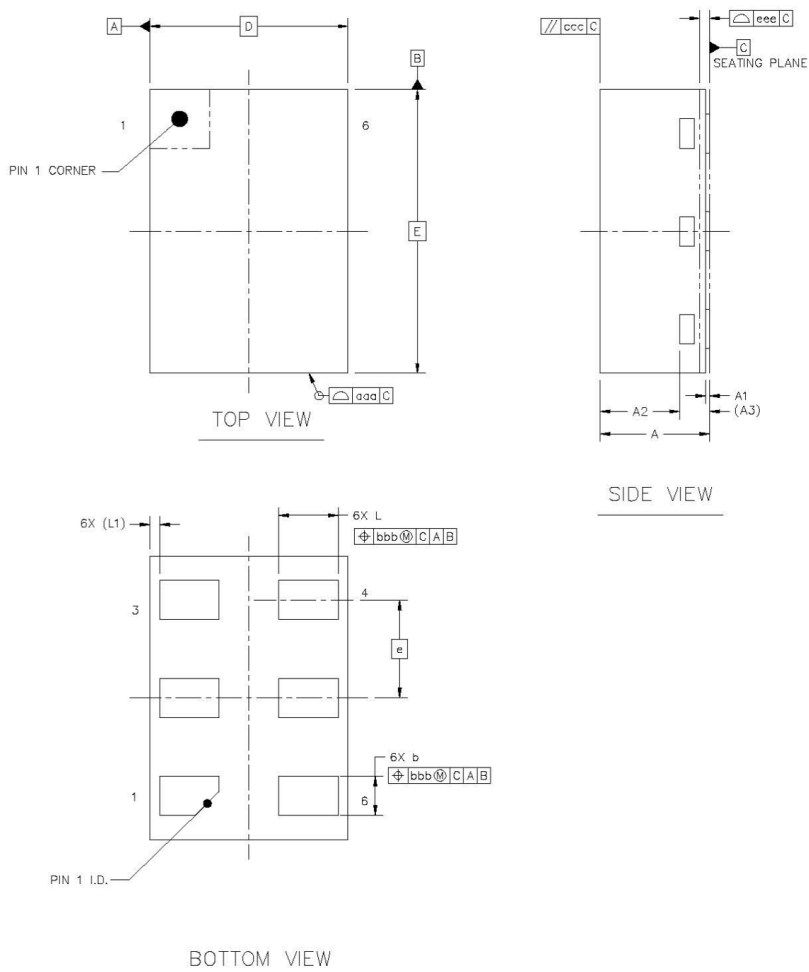


		SYMBOL	MIN	NOM	MAX
TOTAL THICKNESS		A	0.5	0.55	0.6
STAND OFF		A1	0	0.02	0.05
MOLD THICKNESS		A2	---	0.4	---
L/F THICKNESS		A3	0.152 REF		
LEAD WIDTH		b	0.15	0.2	0.25
BODY SIZE	X	D	1 BSC		
	Y	E	1.45 BSC		
LEAD PITCH		e	0.5 BSC		
LEAD LENGTH		L	0.25	0.3	0.35 ⁺
		L1	0.05 REF		
PACKAGE EDGE TOLERANCE		aaa	0.1		
MOLD FLATNESS		ccc	0.1		
COPLANARITY		eee	0.05		
LEAD OFFSET		bbb	0.1		

EM74LVC1G125

Bus buffer/line driver; 3-state


DFN0.8x0.8-5L

Package Outline Dimensions

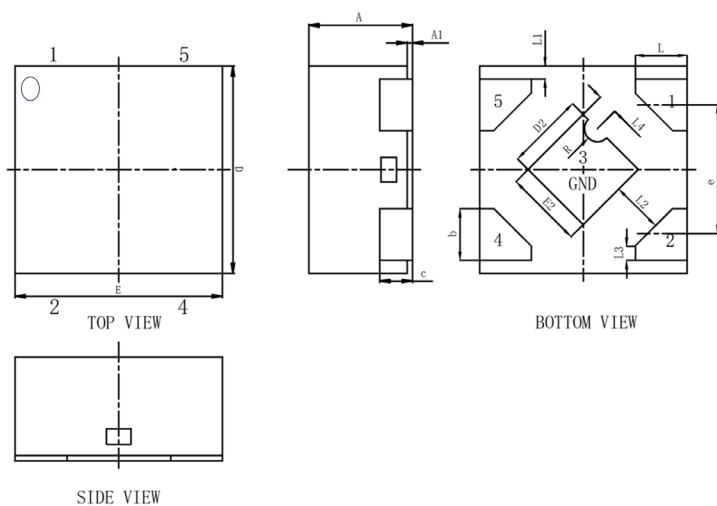

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.35	—	0.40
A1	0.00	0.02	0.05
b	0.15	0.20	0.25
c	0.127REF		
D	0.75	0.80	0.85
D2	0.20	0.30	0.40
e	0.50BSC		
E	0.75	0.80	0.85
E2	0.20	0.30	0.40
L	0.15	0.20	0.25
L1	0.05REF		
L2	0.20REF		
L3	0.055REF		
L4	0.10REF		
R	0.05REF		

Suggested Pad Layout

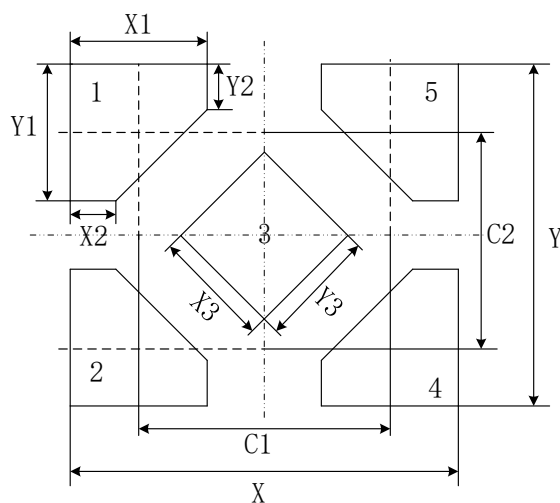

Dimensions	Value(mm)
C1	0.650
C2	0.500
X	1.000
X1	0.350
X2	0.100
X3	0.300
Y	0.800
Y1	0.300
Y2	0.100
Y3	0.300

12. Tape and Reel Information

12.1. Carrier tape dimensions

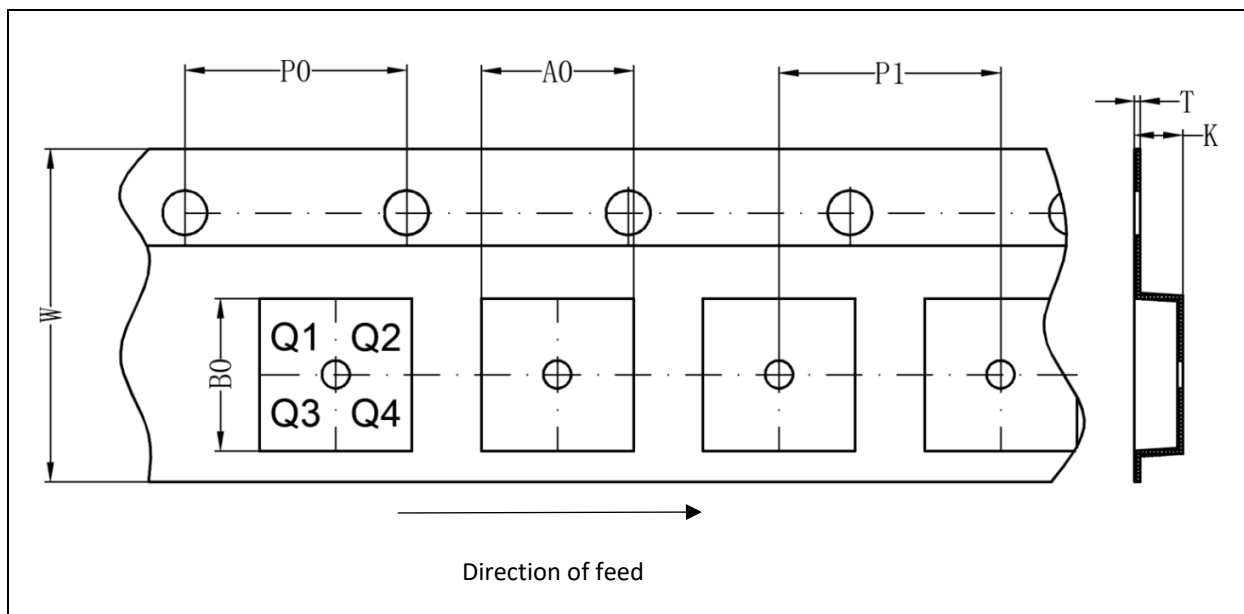


Table 10. Carrier tape dimensions

Package version	A0(mm)	B0(mm)	K0(mm)	T(mm)	P1(mm)	W(mm)	P0(mm)	PIN 1
SOT23-5L	3.23	3.17	1.37	0.25	4	8	4	Q3
SOT353	2.55	2.55	1.2	0.2	4	8	4	Q3
DFN1x1-6L	1.16	1.16	0.5	0.23	4	8	4	Q1
DFN1x1.45-6L	1.15	1.6	0.75	0.2	4	8	4	Q1
DFN0.8x0.8-5L	0.91	0.91	0.5	0.2	2	8	4	Q1

EM74LVC1G125

Bus buffer/line driver; 3-state

12.2. Reel and box dimensions

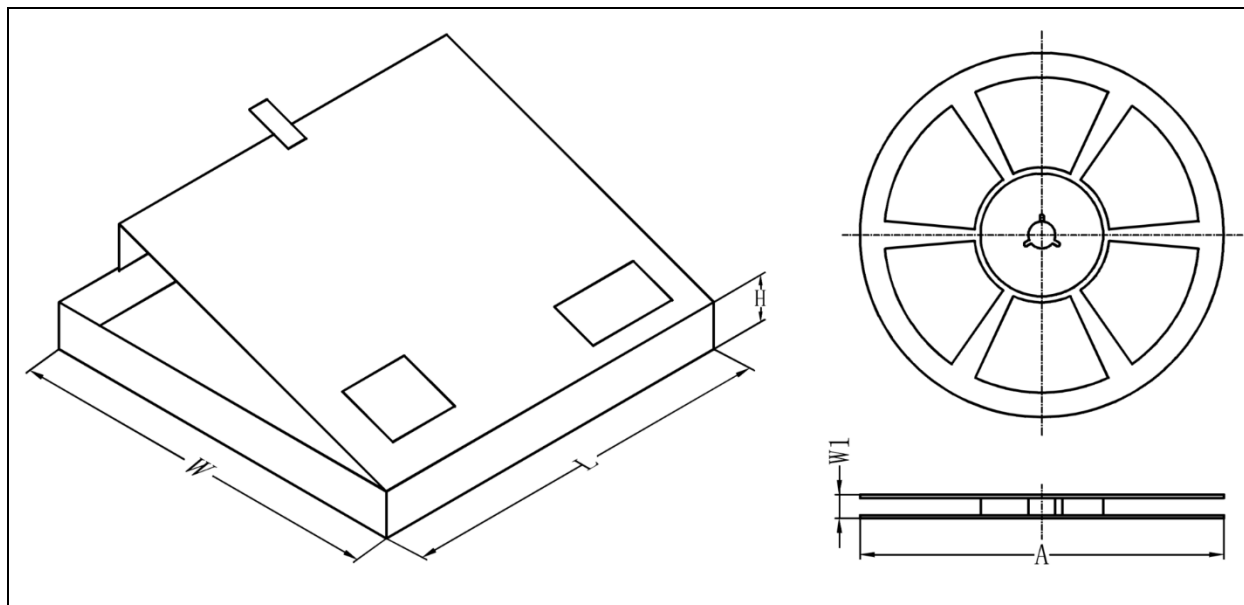


Table 11. Dimensions and quantities

Package version	Type NO. ending	Reel Dimension A (mm)	Max Reel Width W1 (mm)	SPQ (pcs)[1]	Reels per box	Outer box dimensions L×W×H(mm)[2]
SOT23-5L	GV	180	13.2	3000	1	210x200x40
SOT353	GW	180	13.2	3000	1	210x200x40
DFN1x1-6L	GS	180	13.2	3000	1	210x200x40
DFN1x1.45-6L	GM	180	13.2	3000	1	210x200x40
DFN0.8x0.8-5L	GX	180	13.2	3000	1	210x200x40

[1] Packing quantity dependent on specific product type. Please contact your local Energymath representative for ordering.

[2] Dimensions for reference only.

13. Abbreviations

Table 12. Abbreviations

Acronym	Description
CMOS	Complementary Metal-Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model
MM	Machine Model
TTL	Transistor-Transistor Logic

14. Revision History

Table 13. Revision history

Document ID	Release Date	Data sheet status	Change notice	Supersedes
EM74LVC1G125 Rev1.1	Jun 20, 2025	Product datasheet		EM74LVC1G125 Rev1.0
Modifications:	• Section 12: Added tape and reel information.			
EM74LVC1G125 Rev1.0	Oct 30, 2023	Product datasheet		