

1. General Description

The EMS2750 is a dual SPDT low on-resistance analog switch. It can operate from 1.5V to 5.5V power supply. The device offers low ON-state resistance and excellent ON-state resistance matching with break-before-make feature, to prevent signal distortion during the transferring of a signal from one channel to another. The device is capable of truly isolation. Even when COMx overrides V_{CC} , very little current will flow back to the supply.

2. Features and Benefits

- Wide Supply Range from 1.5 V to 5.5 V
- Low ON-state resistance, typically $1.9\ \Omega$ ($V_{CC}=5.5\text{ V}$)
- 1.8 V Compatible Control Logic Inputs
- High Off-Isolation: -80 dB @ 10 kHz
- Low Channel-to-Channel Crosstalk: -82 dB @ 10 kHz
- High Bandwidth (-3dB @ 800MHz) Suitable For USB2.0 High-Speed Routing
- Low Quiescent Current ($< 1\mu\text{A}$) when $V_{CC} = 3.3\text{ V}$

3. Applications

- Audio, Video, UART, USB2.0 Signal and Supply Routing
- Cell phones and TWS headset
- USB Type-C Mic/Gnd Switch
- DC Motor Drive

EMS2750

Low Voltage and High Speed Dual SPDT Analog Switch with True Isolation


4. Ordering Information

Table 1. Ordering information

Type number	Topside marking	Package		
		Name	Description	Quantity
EMS2750RSW	2750 XYYWW	QFN1.4x1.8-10L	QFN package, 10 pins 1.4 mm × 1.8 mm; 0.55 mm (Max) height	3000

MARKING INFORMATION

NOTE: XYYWW = Vendor Code and Data Code.



5. Pinning Information

5.1. Pin map

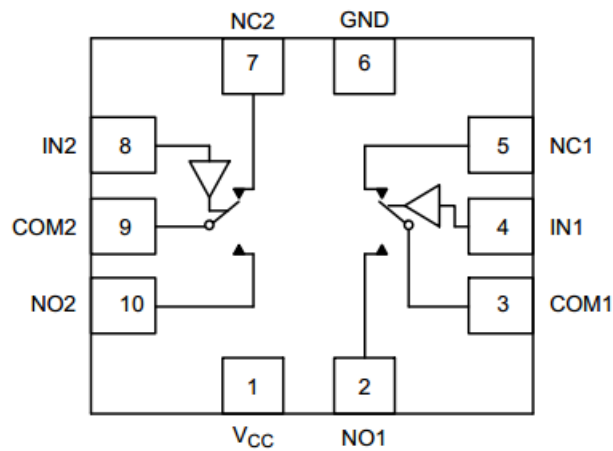


Fig 1. Top view pin configuration QFN-10L

EMS2750**Low Voltage and High Speed Dual SPDT Analog Switch with True Isolation**

5.2. Pin description

Table 2. Pin description

Symbol	Pin	Description
V _{cc}	1	Select pin for switch 1 Power supply pin
NO1	2	Normally open I/O for switch 1
COM1	3	Common I/O for switch 1
IN1	4	Select pin for switch 1
NC1	5	Normally closed I/O for switch 1
GND	6	Ground
NC2	7	Normally closed I/O for switch 2
IN2	8	Select pin for switch 2
COM2	9	Common I/O for switch 2
NO2	10	Normally open I/O for switch 2

EMS2750**Low Voltage and High Speed Dual SPDT Analog Switch with True Isolation**

6.Functional Description

Table 3. Function table

H = HIGH voltage level; L = LOW voltage level.

IN	NC TO COM, COM TO NC	NO TO COM, COM TO NO
L	ON	OFF
H	OFF	ON

7.Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Table 4. Absolute Maximum Ratings

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND.

Symbol	Parameter	Conditions	Min	Max	Unit
V _{CC}	supply voltage		-0.3	6.5	V
V _{IN}	control Input Voltage		-0.3	6.5	V
V _A	signal input voltage		-0.3	6.5	V
I _A	continuous Current Through COM, NC, NO			±100	mA
	peak Current Through COM, NC, NO (pulsed at 1ms 50% duty cycle)			±200	mA
T _J	junction Temperature under Bias			150	°C
T _L	lead Temperature (Soldering, 10 seconds)			260	°C
R _{θJA}	thermal resistance			350	°C/W

8. Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. EnergyMath does not recommend exceeding them or designing to Absolute Maximum Ratings.

Table 5. Recommended Operating Conditions

Symbol	Parameter	Conditions	Min	Max	Unit
V _{CC}	supply voltage		1.5	5.5	V
V _{IN}	control input voltage		0	5.5	V
V _A	signal input voltage		0	V _{CC}	V
T _{amb}	ambient temperature		-40	125	°C

9. Electrical Characteristics

Table 6. Static characteristics
 $T_{amb}=25\text{ }^{\circ}\text{C}$, $V_{CC}=3.3\text{ V}$, unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
DC Electrical Characteristics						
V_{IH}	input logic high level	$V_{CC} = 3.4\text{ V to }5.5\text{ V}$	1.6			V
		$V_{CC} = 1.5\text{ V to }3.3\text{ V}$	1.4			V
V_{IL}	input logic low level	$V_{CC} = 3.4\text{ V to }5.5\text{ V}$			0.6	V
		$V_{CC} = 1.5\text{ V to }3.3\text{ V}$			0.4	V
I_{CC}	supply current	$I_A = 0$, $V_{SEL} = 0$ or $V_{SEL} = V_{CC}$			1.0	μA
ΔI_{CC}	additional supply current	$I_A = 0$, $V_{CC} = 2.5\text{ V or }4.2\text{ V}$ $V_{SEL} = 1.6\text{ V}$			3.0	μA
I_{off}	OFF-state switch leakage current from COM to NC (or NO)	$V_A = 5\text{ V}$, V_{NC} or $V_{NO} = 0\text{ V}$			± 2.0	μA
R_{ON}	on-resistance	$V_{CC} = 3.5\text{ V}$, $V_A = 0.8\text{ V to }2.0\text{ V}$, $I_A = 10\text{ mA}$		3.4	4.0	Ω
		$V_{CC} = 4.5\text{ V}$, $V_A = 0.8\text{ V to }2.3\text{ V}$, $I_A = 10\text{ mA}$		2.4	3.0	Ω
		$V_{CC} = 5.5\text{ V}$, $V_A = 0.8\text{ V to }2.6\text{ V}$, $I_A = 10\text{ mA}$		1.9	2.5	Ω
R_{FLAT}	on-resistance flatness	$V_{CC} = 3.5\text{ V}$, $V_A = 0.8\text{ V to }2.0\text{ V}$, $I_A = 10\text{ mA}$		0.2	0.5	Ω
		$V_{CC} = 4.5\text{ V}$, $V_A = 0.8\text{ V to }2.3\text{ V}$, $I_A = 10\text{ mA}$		0.25	0.5	Ω
		$V_{CC} = 5.5\text{ V}$, $V_A = 0.8\text{ V to }2.6\text{ V}$, $I_A = 10\text{ mA}$		0.3	0.5	Ω
ΔR_{ON}	on-resistance matching between channels	$V_{CC} = 3.5\text{ V}$, $V_A = 0.8\text{ V to }2.0\text{ V}$, $I_A = 10\text{ mA}$		0.1	0.2	Ω
		$V_{CC} = 4.5\text{ V}$, $V_A = 0.8\text{ V to }2.3\text{ V}$, $I_A = 10\text{ mA}$		0.1	0.2	Ω
		$V_{CC} = 5.5\text{ V}$, $V_A = 0.8\text{ V to }2.6\text{ V}$, $I_A = 10\text{ mA}$		0.1	0.2	Ω

EMS2750

Low Voltage and High Speed Dual SPDT Analog Switch with True Isolation


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
AC Electronics Characteristics						
t_{ON}	turn-On Time	$V_A=1.5V, C_L=50pF, R_L=50\Omega$		470		ns
t_{OFF}	turn-Off Time	$V_A=1.5V, C_L=50pF, R_L=50\Omega$		120		ns
t_{BBM}	break-before-make time	$V_A=1.5V, C_L=50pF, R_L=50\Omega$		600		ns
BW	-3dB Bandwidth	$C_L=0pF$		800		MHz
OIRR	off isolation	$f=1KHz$		-81		dB
		$f=10KHz$		-80		dB
X_{TALK}	crosstalk	$f=1KHz$		-83		dB
		$f=10KHz$		-82		dB
THD	total harmonic distortion	$f=20Hz$ to $20KHz$ $V_A=600mV_{pp}, R_L=32\Omega$		-80		dB
Capacitance						
C_{ON}	On Capacitance	$f=100KHz$		12		pF
C_{OFF}	Off Capacitance	$f=100KHz$		4		pF

EMS2750

Low Voltage and High Speed Dual SPDT Analog Switch with True Isolation

10. Package Outline

QFN 1.4x1.8 -10L

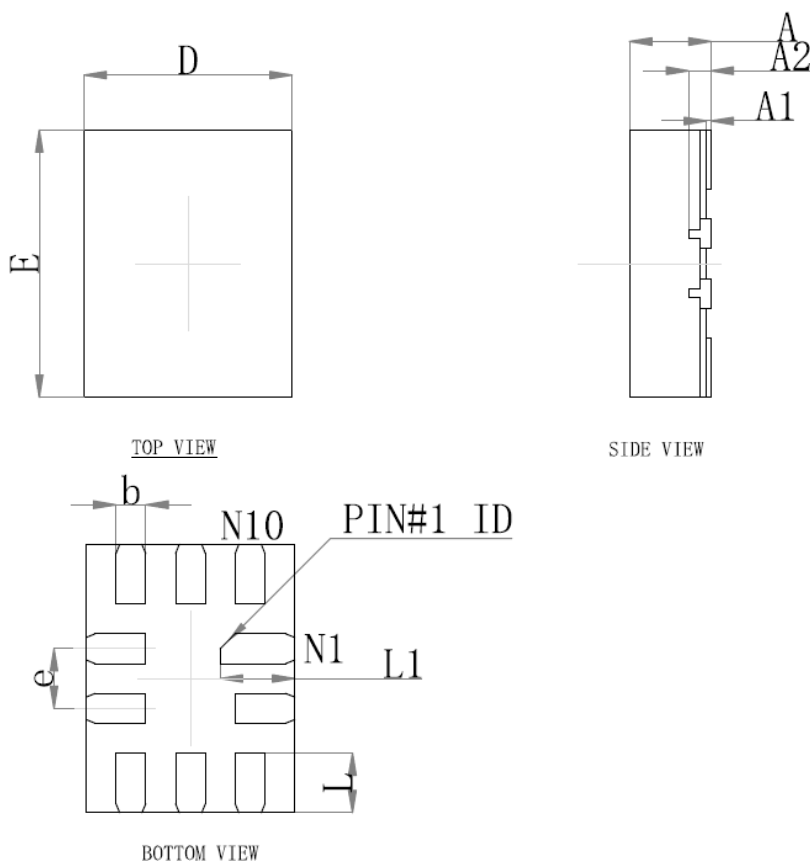

Symbol	Dimension in Millimeters		
	Min.	NOM.	Max.
A	0.500	0.550	0.600
A1	0.000	--	0.050
A2	0.152 Ref.		
D	1.324	1.400	1.476
E	1.724	1.800	1.876
b	0.150	0.200	0.250
e	0.400 Typ.		
L	0.350	0.400	0.450
L1	0.450	0.500	0.550

EMS2750**Low Voltage and High Speed Dual SPDT Analog Switch with True Isolation**

11. Revision History

Table 7. Revision history

Document ID	Release Date	Data sheet status	Change notice	Supersedes
EMS2750 Rev. 1.1	Dec 15, 2025	Product datasheet		EMS2750 Rev. 1.0
Modifications:	• Table 1: topside marking information updated. • Table 6 updated.			
EMS2750 Rev. 1.0	Feb 13, 2024	Product datasheet		