

1. General Description

The EM74HC164A is an 8-bit serial-in/parallel-out shift register. The device features two serial data inputs (DSA and DSB), eight parallel data outputs (Q0 to Q7). Data is entered serially through DSA or DSB and either input can be used as an active HIGH enable for data entry through the other input. Data is shifted on the LOW-to-HIGH transitions of the clock (CP) input. A LOW on the master reset input ($\overline{\text{MR}}$) clears the register and forces all outputs LOW, independently of other inputs. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of V_{CC} .

2. Features and Benefits

- Wide supply voltage range from 2.0 V to 6.0 V
- High noise immunity
- CMOS low power dissipation
- Gated serial data inputs
- Asynchronous master reset
- Latch-up performance exceeds 250 mA
- Complies with JEDEC standard:
 - JESD8C(2.7 V to 3.6 V)
 - JESD7A(2.0 V to 6.0 V)
- ESD protection:
 - HBM ANSI/ESDA/JEDEC JS-001 Class 3A exceeds 6500 V
 - CDM ANSI/ESDA/JEDEC JS-002 Class C3 exceeds 2000 V
- Multiple package options
- Specified from -40 °C to +85 °C and from -40 °C to +125 °C


3. Ordering Information

Table 1. Ordering information


Type number	Topside marking	Package		
		Name	Description	Quantity
EM74HC164AD	HC164A XXXWW	SOP-14L	plastic small outline package; 14 leads; body width 3.9 mm	3000
EM74HC164APW	HC164A XXXWW	TSSOP-14L	plastic thin shrink small outline package; 14 leads; body width 4.4 mm	3000

MARKING INFORMATION

NOTE: XXXWW = Vendor Code and Date Code.



4. Function Diagram

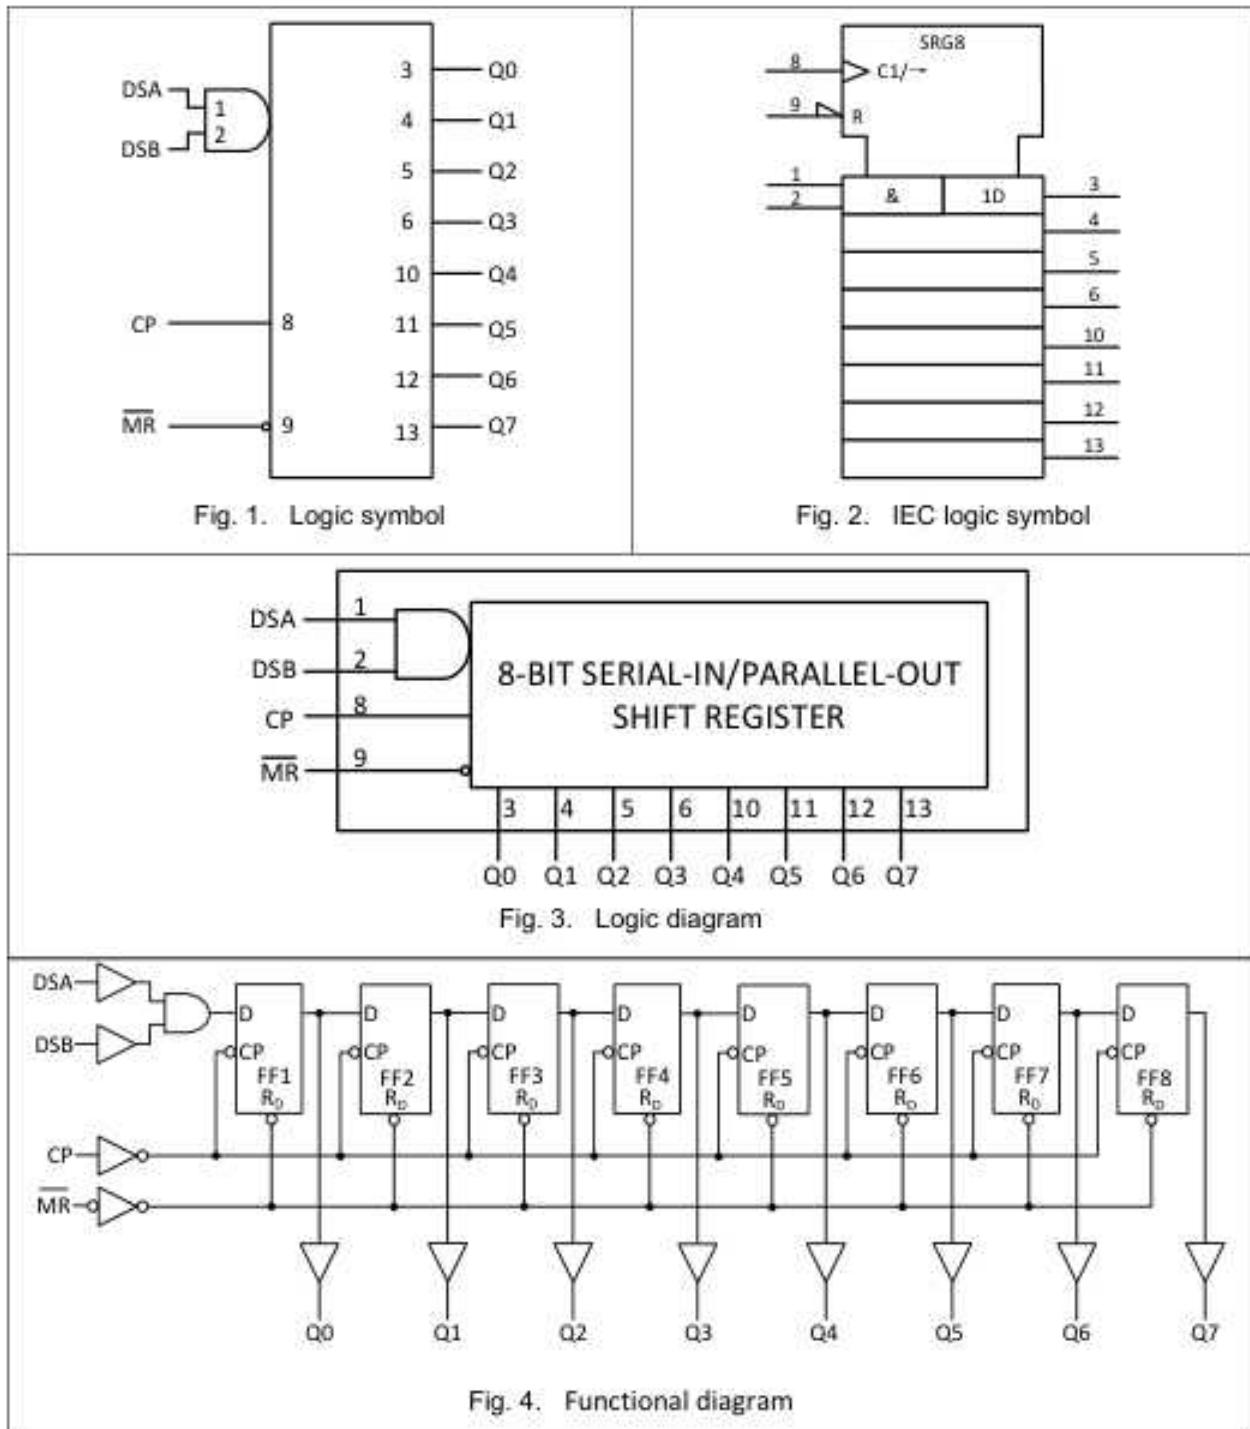

5. Pinning Information

5.1. Pinning

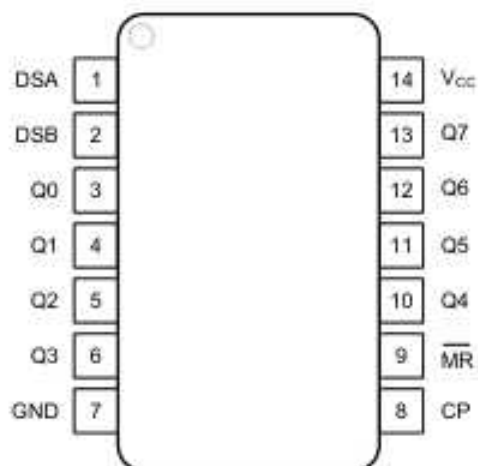


Fig. 5. Top view pin configuration SOP and TSSOP

5.2. Pin description

Table 2. Pin description

Symbol	Pin	Description
DSA	1	data input
DSB	2	data input
Q0, Q1, Q2, Q3, Q4, Q5, Q6, Q7	3, 4, 5, 6, 10, 11, 12, 13	output
CP	8	clock input (LOW-to-HIGH, edge-triggered)
$\overline{\text{MR}}$	9	master reset input (active LOW)
V _{CC}	14	supply voltage
GND	7	ground

6. Functional Description

Table 3. Function table

H = HIGH voltage level; h = HIGH voltage level one set-up time prior to the LOW-to-HIGH clock transition;
 L = LOW voltage level; l = LOW voltage level one set-up time prior to the LOW-to-HIGH clock transition;
 q = lower case letters indicate the state of the referenced input one set-up time prior to the LOW-to-HIGH clock transition; ↑ = LOW-to-HIGH transition; X = don't care

Operating modes	Input				Output	
	MR	CP	DSA	DSB	Q0	Q1 to Q7
Reset(clear)	L	X	X	X	L	L to L
Shift	H	↑	l	l	L	q0 to q6
	H	↑	l	h	L	q0 to q6
	H	↑	h	l	L	q0 to q6
	H	↑	h	h	H	q0 to q6

7. Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Table 4. Absolute Maximum Ratings

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND.

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	7.0	V
I_{IK}	input clamping current	$V_O < -0.5\text{ V}$ or $V_O > V_{CC} + 0.5\text{ V}$ [1]		± 20	mA
I_{OK}	output clamping current	$V_O < -0.5\text{ V}$ or $V_O > V_{CC} + 0.5\text{ V}$ [1]		± 20	mA
I_O	output current	$-0.5\text{ V} < V_O < V_{CC} + 0.5\text{ V}$		± 25	mA
I_{CC}	supply current			50	mA
I_{GND}	ground current		-50		mA
P_{tot}	total power dissipation	$T_{amb} = -40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$		500	mW
T_{stg}	storage temperature		-65	150	$^{\circ}\text{C}$

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

8. Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. EnergyMath does not recommend exceeding them or designing to Absolute Maximum Ratings.

Table 5. Recommended Operating Conditions

Symbol	Parameter	Conditions	EM74HC164A			Unit
			Min	Typ	Max	
V_{CC}	supply voltage		2.0	5.0	6.0	V
V_I	input voltage		0		V_{CC}	V
V_O	output voltage		0		V_{CC}	V
T_{amb}	ambient temperature		-40	+25	+125	$^{\circ}\text{C}$
$\Delta t/\Delta V$	input transition rise and fall rate	$V_{CC} = 2.0\text{ V}$			625	ns/V
		$V_{CC} = 4.5\text{ V}$		1.67	139	ns/V
		$V_{CC} = 6.0\text{ V}$			83	ns/V

9. Static Characteristics

Table 6. Static characteristics

At recommended operating conditions. Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	-40 °C to +85 °C			-40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	
V_{IH}	HIGH-level input voltage	$V_{CC} = 2.0 \text{ V}$	1.5	1.26		1.5		V
		$V_{CC} = 4.5 \text{ V}$	3.15	2.48		3.15		V
		$V_{CC} = 6.0 \text{ V}$	4.2	3.22		4.2		V
V_{IL}	LOW-level input voltage	$V_{CC} = 2.0 \text{ V}$		0.84	0.5		0.5	V
		$V_{CC} = 4.5 \text{ V}$		1.99	1.35		1.35	V
		$V_{CC} = 6.0 \text{ V}$		2.65	1.8		1.8	V
V_{OH}	HIGH-level output voltage	$V_I = V_{IH} \text{ or } V_{IL}$						
		$I_O = -20 \mu\text{A}; V_{CC} = 2.0 \text{ V}$	1.9	2.0		1.9		V
		$I_O = -20 \mu\text{A}; V_{CC} = 4.5 \text{ V}$	4.4	4.5		4.4		V
		$I_O = -20 \mu\text{A}; V_{CC} = 6.0 \text{ V}$	5.9	6.0		5.9		V
		$I_O = -4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.84	4.38		3.7		V
		$I_O = -5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$	5.34	5.87		5.2		V
V_{OL}	LOW-level output voltage	$V_I = V_{IH} \text{ or } V_{IL}$						
		$I_O = 20 \mu\text{A}; V_{CC} = 2.5 \text{ V}$		0	0.1		0.1	V
		$I_O = 20 \mu\text{A}; V_{CC} = 4.5 \text{ V}$		0	0.1		0.1	V
		$I_O = 20 \mu\text{A}; V_{CC} = 6.0 \text{ V}$		0	0.1		0.1	V
		$I_O = 4.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$		0.08	0.33		0.4	V
		$I_O = 5.2 \text{ mA}; V_{CC} = 6.0 \text{ V}$		0.09	0.33		0.4	V
I_i	input leakage current	$V_I = V_{CC} \text{ or } \text{GND}; V_{CC} = 6.0 \text{ V}$		0.003	± 1		± 1	μA
I_{CC}	supply current	$V_I = V_{CC} \text{ or } \text{GND}; I_O = 0 \text{ A}; V_{CC} = 6.0 \text{ V}$		12.7	20		40	μA
C_i	input capacitance			1.5				pF

[1] All typical values are measured at $T_{amb} = 25^\circ\text{C}$.

10. Dynamic Characteristics

Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 9.

Symbol	Parameter	Conditions	-40 °C to +85 °C			-40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	
t_{pd}	propagation delay	CP to Qn; see Fig. 6 [2]						
		$V_{CC} = 2.0\text{ V}$		20	30		35	ns
		$V_{CC} = 4.5\text{ V}$		8.5	15		20	ns
		$V_{CC} = 6.0\text{ V}$		7.4	10		15	ns
t_{PHL}	HIGH to LOW propagation delay	$\overline{MR}$ to Qn; see Fig. 7						
		$V_{CC} = 2.0\text{ V}$		20	30		35	ns
		$V_{CC} = 4.5\text{ V}$		9	15		20	ns
		$V_{CC} = 6.0\text{ V}$		7.6	10		15	ns
t_z	transition time	see Fig. 6 [3]						
		$V_{CC} = 2.0\text{ V}$		10	15		20	ns
		$V_{CC} = 4.5\text{ V}$		4.2	10		15	ns
		$V_{CC} = 6.0\text{ V}$		4	7		9	ns
t_{wv}	pulse width	CP HIGH or LOW; see Fig. 6						
		$V_{CC} = 2.0\text{ V}$	100			120		ns
		$V_{CC} = 4.5\text{ V}$	20			24		ns
		$V_{CC} = 6.0\text{ V}$	17			20		ns
		$\overline{MR}$ LOW; see Fig. 7						
		$V_{CC} = 2.0\text{ V}$	75			90		ns
		$V_{CC} = 4.5\text{ V}$	15			18		ns
		$V_{CC} = 6.0\text{ V}$	13			15		ns
t_{rec}	recovery time	$\overline{MR}$ to CP; see Fig. 7						
		$V_{CC} = 2.0\text{ V}$	75			90		ns
		$V_{CC} = 4.5\text{ V}$	15			18		ns
		$V_{CC} = 6.0\text{ V}$	13			15		ns

EM74HC164A

8-bit serial-in, parallel-out shift register

Symbol	Parameter	Conditions	-40 °C to +85 °C			-40 °C to +125 °C		Unit
			Min	Typ[1]	Max	Min	Max	
t_{SU}	set up time	DSA and DSB to CP; see Fig. 8						
		$V_{CC} = 2.0\text{ V}$	75			90		ns
		$V_{CC} = 4.5\text{ V}$	15			18		ns
		$V_{CC} = 6.0\text{ V}$	13			15		ns
t_h	hold time	DSA and DSB to CP; see Fig. 8						
		$V_{CC} = 2.0\text{ V}$	4			4		ns
		$V_{CC} = 4.5\text{ V}$	4			4		ns
		$V_{CC} = 6.0\text{ V}$	4			4		ns
f_{max}	maximum frequency	for CP; see Fig. 6						
		$V_{CC} = 2.0\text{ V}$	5			4		MHz
		$V_{CC} = 4.5\text{ V}$	24			20		MHz
		$V_{CC} = 6.0\text{ V}$	28			24		MHz
C_{PD}	power dissipation capacitance	per package ; $V_i = \text{GND to } V_{CC}$; [4]		25				pF

[1] Typical values are measured at $T_{AMB} = 25\text{ °C}$.

[2] t_{PQ} is the same as t_{PLH} and t_{PHL} .

[3] t_i is the same as t_{THL} and t_{TLH} .

[4] C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$ where:

f_i = input frequency in MHz;

f_o = output frequency in MHz;


C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

$\sum (C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.


10.1. Waveforms and test circuit

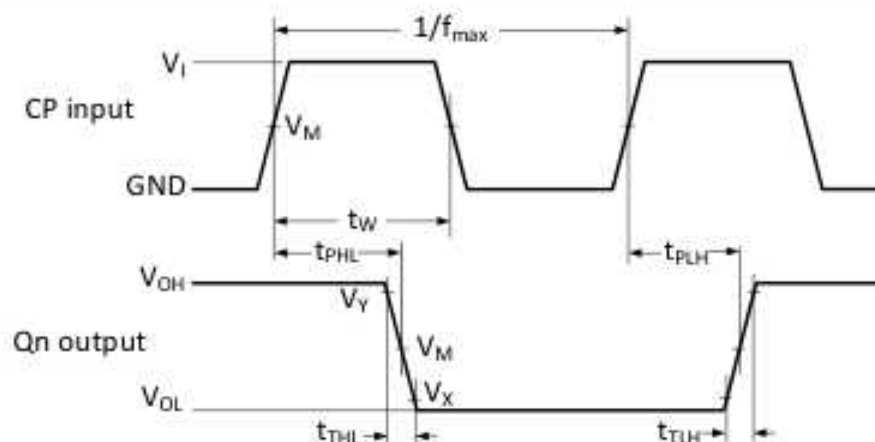

Measurement points are given in Table 8.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig. 6. Waveforms showing the clock (CP) to output (Qn) propagation delays, the clock pulse width, the output transition times and the maximum clock frequency

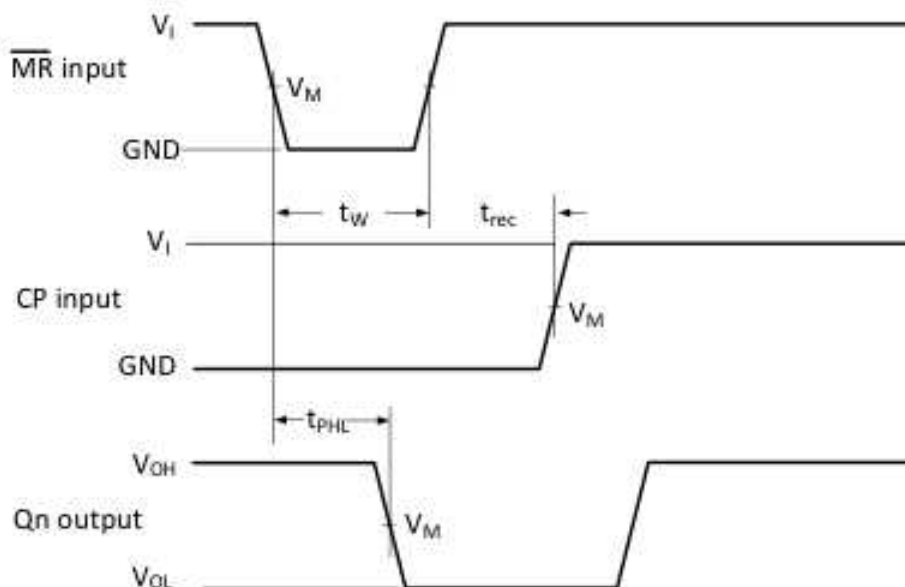

Measurement points are given in Table 8.

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Fig. 7. Waveforms showing the master reset (MR) pulse width, the master reset to output (Qn) propagation delays and the master reset to clock (CP) removal time

EM74HC164A

8-bit serial-in, parallel-out shift register

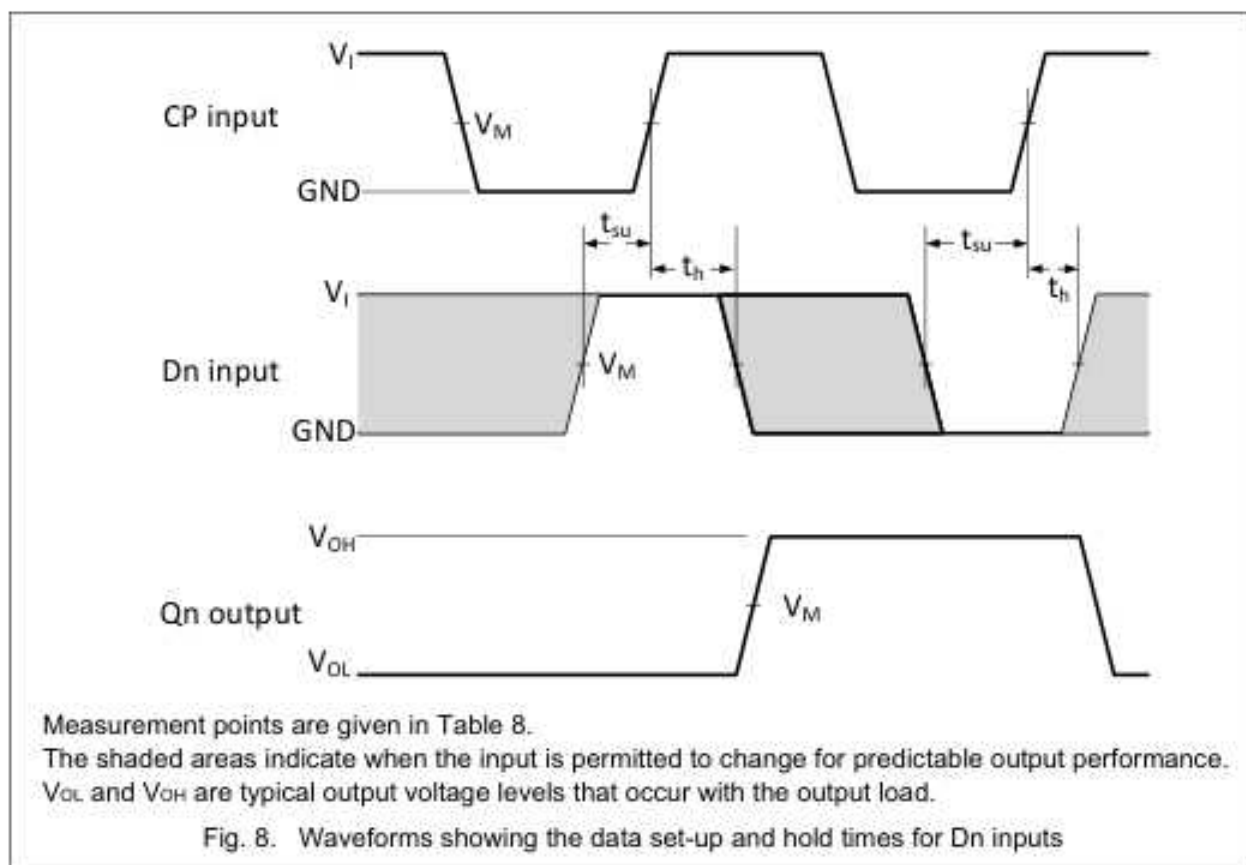


Table 8. Measurement points

Type	Input	Output		
	V_I	V_M	V_X	V_Y
EM74HC164A	0.5V _{CC}	0.5V _{CC}	0.1V _{CC}	0.9V _{CC}

EM74HC164A

8-bit serial-in, parallel-out shift register


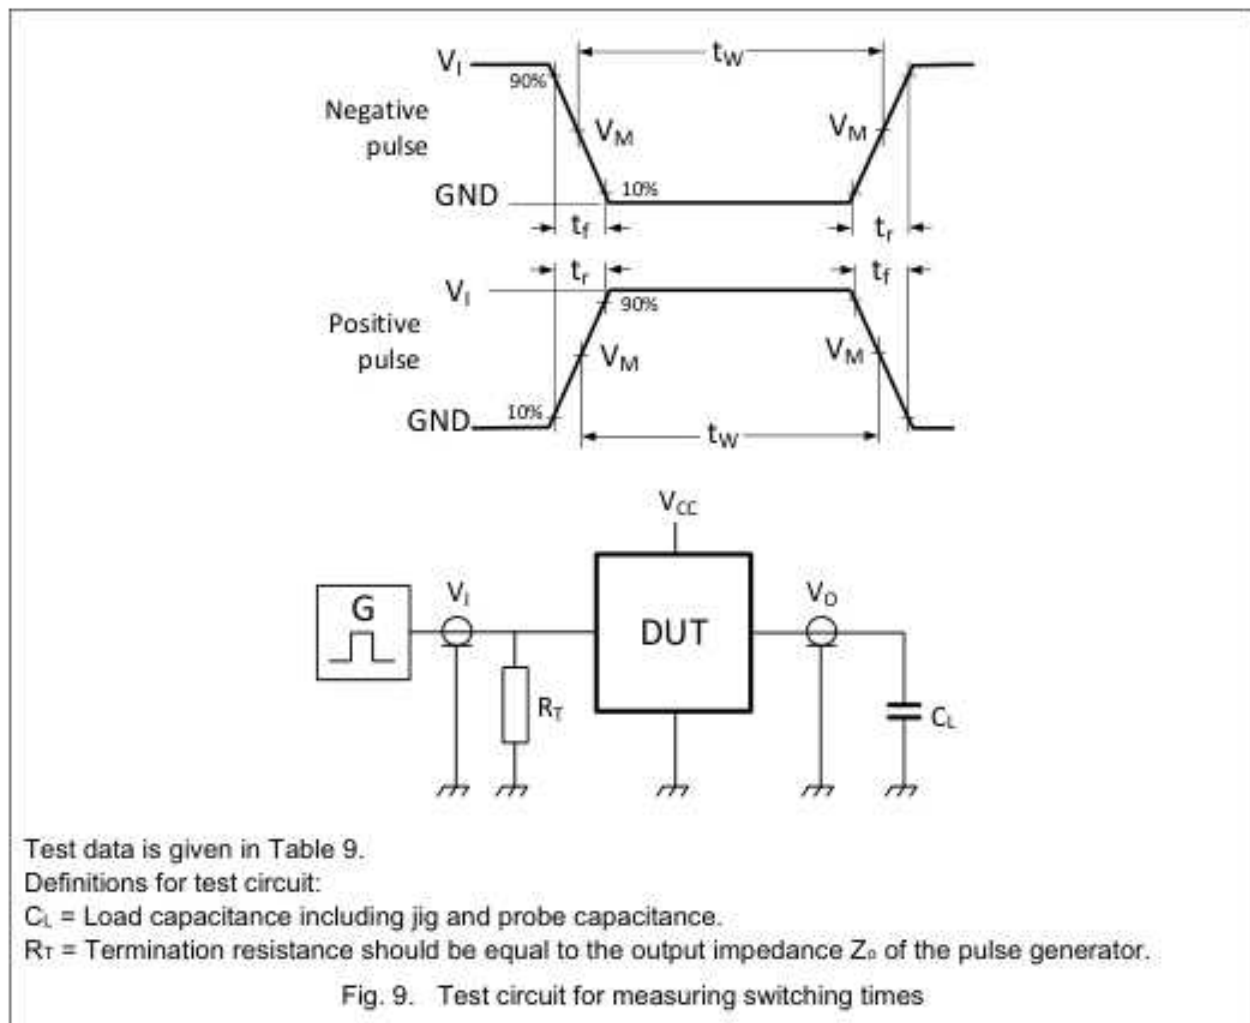


Table 9. Test data

Type	Input		Load	Test
	V_I	$t_r = t_f$	C_L	
EM74HC164A	V_{CC}	2.5 ns	50 pF	t_{PHL}, t_{PLH}

11. Package Outline

SOP-14L

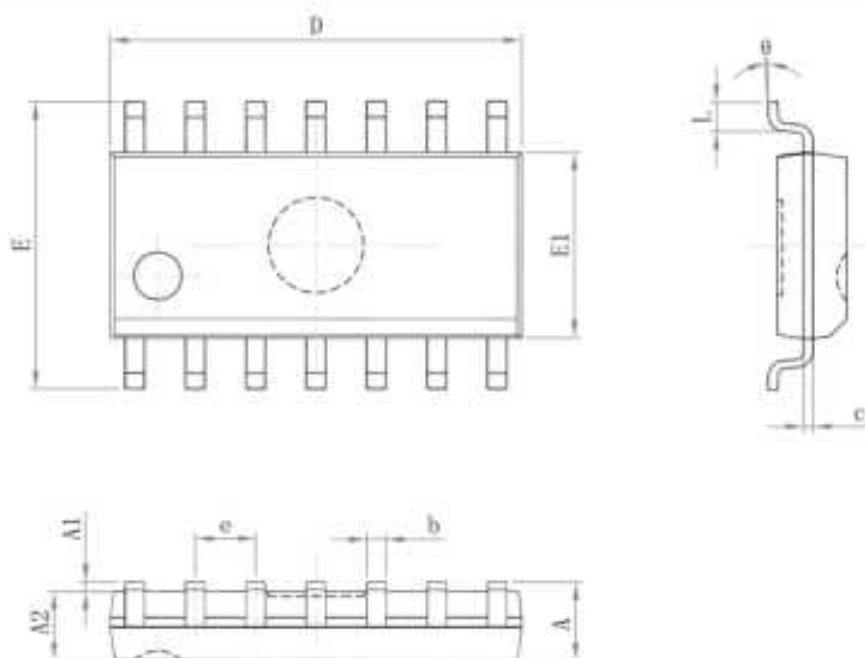


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	—	1.750	—	0.069
A1	0.100	0.250	0.004	0.010
A2	1.250	—	0.049	—
b	0.310	0.510	0.012	0.020
c	0.100	0.250	0.004	0.010
D	8.450	8.850	0.333	0.348
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

EM74HC164A

8-bit serial-in, parallel-out shift register


TSSOP-14L

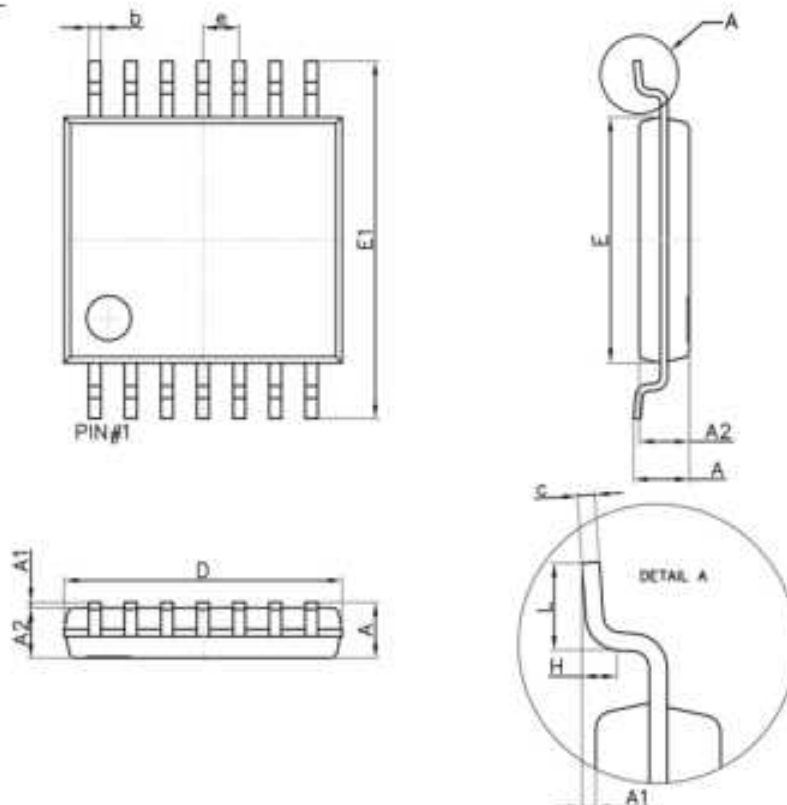

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
D	4.900	5.100	0.193	0.201
E	4.300	4.500	0.169	0.177
b	0.190	0.300	0.007	0.012
c	0.090	0.200	0.004	0.008
E1	6.250	6.550	0.246	0.258
A	—	1.200	—	0.047
A2	0.800	1.000	0.031	0.039
A1	0.050	0.150	0.002	0.006
e	0.65 (BSC)		0.026 (BSC)	
L	0.500	0.700	0.020	0.028
H	0.25(TYP)		0.01(TYP)	
θ	1°	7°	1°	7°

12. Tape and Reel Information

12.1. Carrier tape dimensions

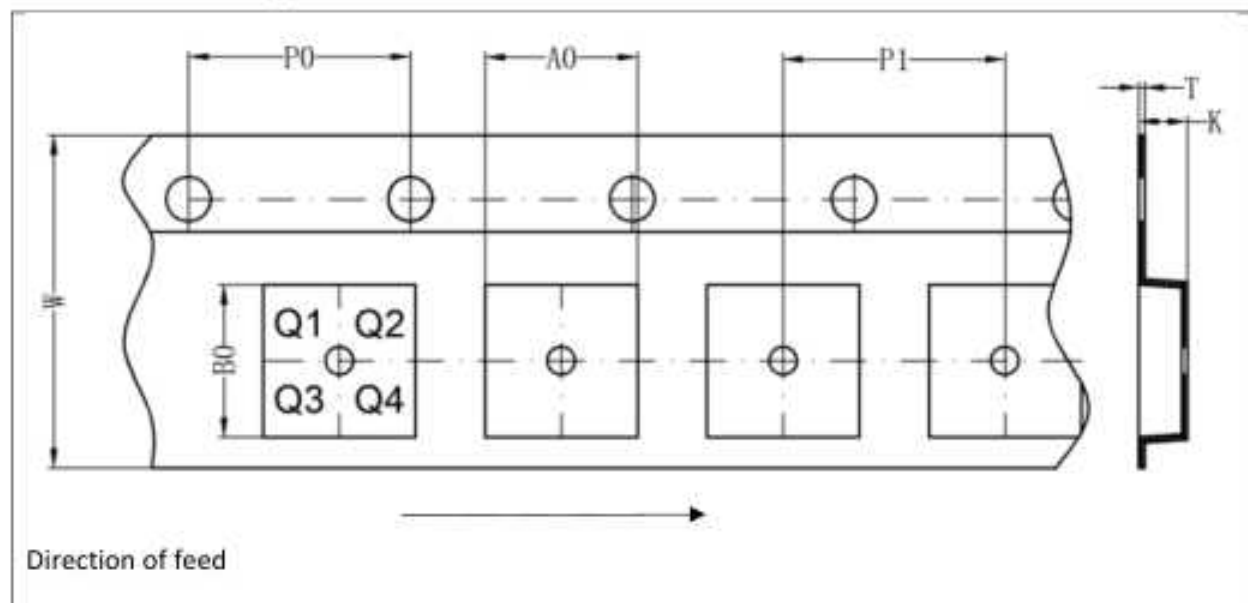
Table 10. Carrier tape dimensions

Package version	A0(mm)	B0(mm)	K0(mm)	T(mm)	P1(mm)	W(mm)	P0(mm)	PIN 1
SOP-14L	6.35	9.1	1.9	0.22	8	16	4	Q1
TSSOP-14L	6.7	5.45	1.6	0.25	8	12	4	Q1

12.2. Reel and box dimensions

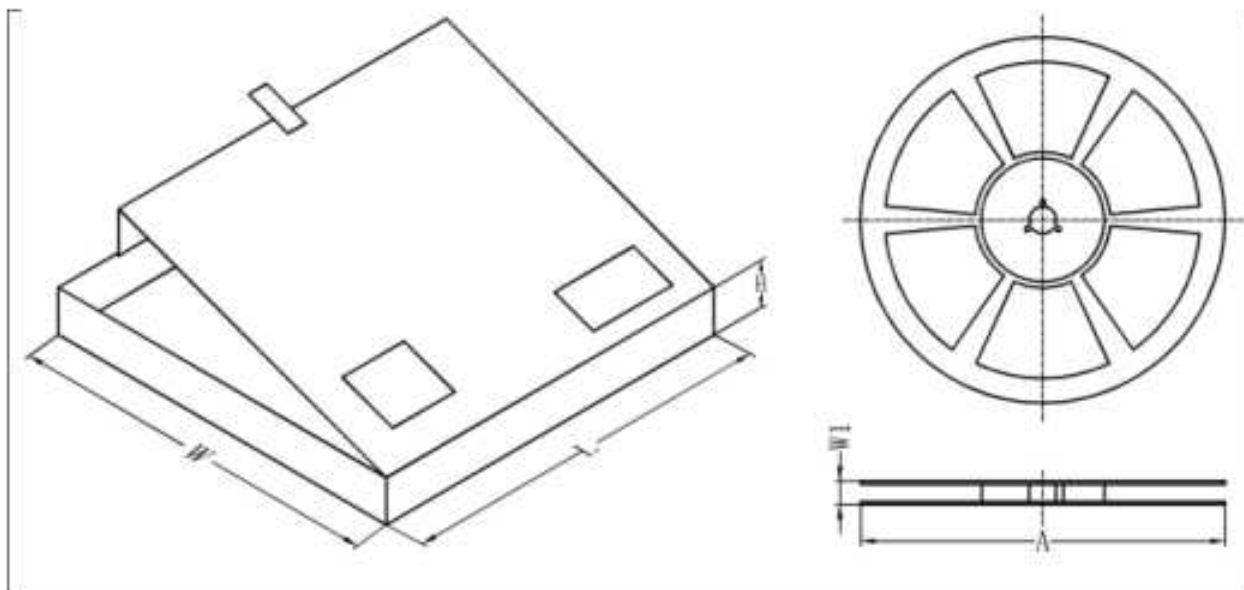


Table 11. Dimensions and quantities

Package version	Type NO. ending	Reel Dimension A (mm)	Max Reel Width W1 (mm)	SPQ (pcs)[1]	Reels per box	Outer box dimensions L×W×H(mm)[2]
SOP-14L	D	330	22.4	3000	1	358x340x50
TSSOP-14L	PW	330	18.4	3000	1	358x340x50

[1] Packing quantity dependent on specific product type. Please contact your local Energymath representative for ordering.

[2] Dimensions for reference only.

13. Abbreviations

Table 12. Abbreviations

Acronym	Description
CMOS	Complementary Metal-Oxide Semiconductor
DUT	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model
CDM	Charged Device Model

14. Revision History

Table 13. Revision history

Document ID	Release Date	Data sheet status	Change notice	Supersedes
EM74HC164A Rev. 1.1	Jun 15, 2025	Product datasheet		EM74HC164A Rev. 1.0
Modifications:	• Section 12 : Added tape and reel information.			
EM74HC164A Rev. 1.0	Jul 07, 2024	Product datasheet		