
Anaerobic Cum Microaerophilic Workstation

MAKE: BIOXIA

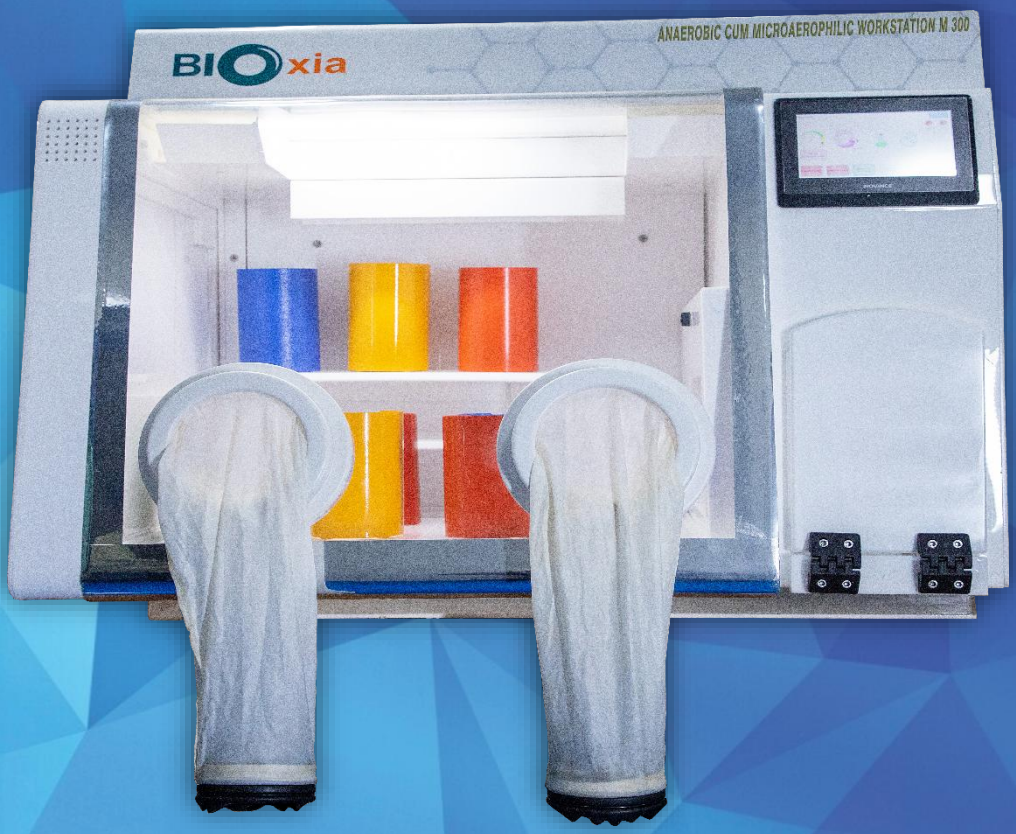

MODEL: M-300

BIOxia

www.bioxia.co.in

ANAEROBIC CUM MICROAEROPHILIC WORKSTATION M-300

Body Construction: Durable, Non-Corrosive, Opaque sheet of Acrylic Resin of 6mm or 8mm thickness for the entire body, except the front panel of acrylic resin but transparent sheet, for better visibility and insulation.

These workstations allow us to isolate cells in a chamber that accurately maintains and controls temperature, humidity, oxygen & Carbon dioxide and positive pressure. With this workstation we study the most complex cell interactions under perfect Anaerobic and Microaerophilic conditions.

Main Workstation Capacity: Up to 350 plates of 90mm X 15mm
Inoculation working space: 40 % of Total volume in addition to above space
Dimensions: L X D X H (approx.)
External: 900 X 900 X 900 mm
Main Chamber: 650 X 750 X 750 mm
Inter lock: 250 X 400 X 300 mm

Separate Transfer Chamber: Air Lock/ Isolated/Interlock chamber, for inserting at least 35 plates at a time, with Proper leakproof door and handle

Interlock Cycle Time: 20 S

We can transfer the Petri plates from Glove Port also.

Gloveless Technology: Bare Hand Facility

Incubation: Integrated

Inlet operation for four separate gases – Premixed anaerobic gas (H2: Co2: N2) (10% : 10 % : 80 %), N2, Co2 and Air or Oxygen.

To make the chamber oxygen-free, automatic forced purging system for the Main Chamber as well as interlock chamber, with adjustable purging period

Airlock / Pass box System: Minimum Time to reach Anaerobic Conditions (Less than 2 mins)

Gas Control: Automated Gas Mixing, Precise control of N2, H2, Co2

Automated commissioning Cycle

Oxygen Controlled with Display 0.0 % to 20.0 %

To achieve the chamber oxygen faster rate, additional facility to condition the workstation atmosphere using Palladium catalyst and adjust the internal airflow.

System having catalyst monitoring System.

Workstation controlled temperature, Fluorescent Light & blower.

Heating element along with controller provided to maintain the temperature inside chamber within 25°C to 48°C, with Temperature Uniformity ± 2° C at 37°C , ± 0.5 ° C accuracy

Humidity Control: 50 % to 90 % relative humidity, stable environment with a built humidity system. Automatic de-humidity control system.

Temperature Control: Programmable 25° C to 48 ° C, ± 0.5 ° C accuracy

Digital Display :

I. Touch Screen LCD Display for Monitoring as well as control: of Chamber pressure, Temperature, Humidity, gas cylinder pressure, Light 1 & Light 2

II. Said Touch Screen display continuously indicate & control:

Controls O2 from 0.0 % to 20.0 % in 0.1% increments

Controls Pressure from 0.15 to 0.30 KPA increments

Control of Temperature from ambient to 48 ° C

Control of Humidity from ambient to 85 % Rh

III. Said LCD display simplifies the calibration process

Automatically calibrates O2 sensor through one touch screen control.

Provides rapid equalization.

Facilitates the download of data.

Said Touch

IV. Said Touch Screen display allows :

Facilitating up to 4 different O2

Concentrations through a user-defined sequence of time

Oxygen sensor present in the main working Chamber

System having real time anaerobic condition monitoring System

V. Workstation supplied with Gas Control Software

USB communications port, 60 days continuous storage of event log data of Temperature, Pressure, O2, Co2 One touches calibration (O2), On-screen fault assistance, Cycle programming

Data Logging : Real Time Monitoring, Data Logging

VI. Digital Display with in build Sleep Mode Operation: Automatically save energy as well as help to maintain sterile work area during workstation is not in operation

VII. Digital Display having the remote control access facility

Utility port with “flexible hose” for manual purging by nitrogen, inside the chamber, through Foot Switch

Condensate controller technology inbuilt in the workstation

Workstation controlled & continuously show positive pressure of the chamber. Positive pressure (0.15 KPA / 0.0015 bar) of inner environment, continuously maintained inside the incubation chamber

Atmosphere monitoring : O2, Co2, H2, Temperature and Humidity Sensors

Audio and Visual alarm for low or excess oxygen level

Audio and Visual alarm for gas cylinder pressures, chamber pressure and temperature

Low Gas Consumption of the System

Safety Features: Excess Pressure relief valve for releasing excess pressure inside chamber.

Overshoot Temperature Control System - Temperature Overshoot controller for safety purpose

Inbuilt Trim-point for temperature calibration

Front 10% slope viewing panel.

Operated by Wireless foot switch, for operation of gas nozzle ports & spot lamp inside chamber and Nitrogen purging

Foot-operated high intensity halogen inspection spot lamp for close sample analysis

Humidity Control: To give precise environmental control. Ambient to 85 %

Temperature Control: Incubation control from Ambient + 5 °C to 48 °C

Temperature overshoot controller for safety purpose

Gloveless technology for direct hand access into workstation

5/15-amp, Electrical power socket within the work area

Trolley with castor wheel to keep the machine

Unit supplied with

Nitrogen gas cylinder with regulator – 1 No

Mix gas cylinder with regulator – 1 No.

Catalyst pouch (400 gms) - 1 No

Anaerobic indicator media / Stripes with terable & Sealed cover

Petriplate Holder – 5 Nos

Pair of Neoprene Gloves, Bare Hand Gloves Facility for access inside the chamber & easy And comfortable handling – 2 Nos.

Tropicalization :

Operating Temp 25°C to 48°C

Storage Temp up to 48 °C

Relative Humidity : Up to 90 % No condensing

Power Supply :

Power Input : 220 V-240V AC,50 Hz fitted with plug

Resettable over current breaker fitted with protection

Standards &Safety :

CE Marked product
ISO 9001 : 2015
GMP Certified

Warranty : 2 years comprehensive, onsite warranty Included

Calibration of Oxygen





Settings



"Flexible hose" One Utility Connection Port



Touch Screen Display



Data Logging Facility



Interlock Transfer



Condensing Cooling Plate



Spot Lamp



Foot Switch



Bare Hand Facility




Petri Dish Holders



Gloves



Catalyst & Detox Pouch

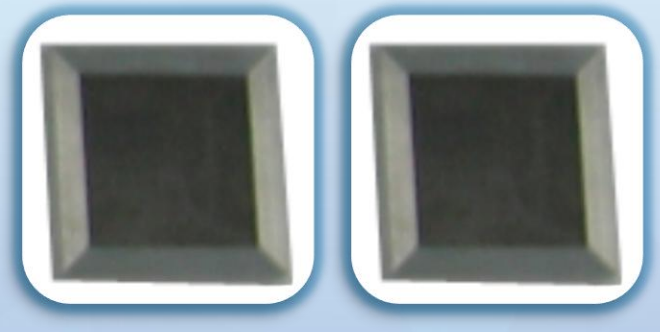

PRODUCT SUMMARY

PRODUCT SUMMARY OF WORKSTATION

MODEL	M300
Max Plate Capacity	350
Interlock Plate Capacity	35
Interlock Cycle Time	20s
Cabinet Mode of Construction	Acrylic Resin Sheet
Max Incubation Temperature	48° C
Gas Supply	Premixed anaerobic gas (H2: Co2: N2) (10% : 10 % : 80 %), N2, Co2 and Air or Oxygen.
Humidity control	√
Condensate Control	√
Positive Pressure Display	√
Safety Excess Pressure Relief Valve	√
Low Gas Alarm	√
Inspection Spot Lamp	√
Fluorescent Illumination	√
Palladium Catalyst	√
Activated Carbon Particles	√
Oxygen Sensor with Display	√
Oxygen Controlled with Display 0.0% to 22.00%	√
Ultra Violet (UV) Light	O
Bare Hand Facility	√
Incubator	O
Foot Switch Operation	√
Removable Front	O
Internal Power Supply	√
Utility nozzle Connection	√
LCD Display with control	√
Fan Unit	√
Adjustable Shelf	√
Anaerobic Indicator	√
Cabinet Stand	O
Regulator for Cylinder	√
Pair of Gloves	√
Vacuum Line Port	√
Cable Gland Port	√
Petri Dish Holder	√

√ - Available 0 - Optional N/A - Not Available

Work Address: H-7, Rajalaxmi Commercial Complex, Ground Floor, Kalher, Tal- Bhiwandi, Dist- Thane 421302

Email: bioxia.in@gmail.com | Website: www.bioxia.co.in