ANAEROBIC JAR FILLING SYSTEM

- User Friendly
- Touch Screen LCD Display
- Quick & Convenient Solution
- Simple Assembly with Alternative Users Option
- Anaerobic / Microaerophilic Condition Achieved within 1 Minute



Make: BIOXIA

Model No: AJFS ULTIMA

BiOxia

ANAEROBIC JAR FILLING SYSTEM



The Anaerobic Jar Filling System is develop, to achieve anaerobic atmospheric condition inside the Jar in less than 1 minute.

Also, create Microaerophilic conditions in less than 1 Minute

Create atmosphere suitable for the culture of anaerobic as well as Microaerophilic bacteria.



To achieve quick Anaerobic / Microaerophilic conditions, used unique vacuum technology along with purging technology.

Come with Jars, which are clear, transparent, single chamber, polycarbonate-having capacity to accommodate 12 petri dishes, & smaller jars of 6 Petri dishes



Simple Assembly with alternative user option

Options for double chamber jars with 12 & 24 and bigger jars with 36 petri dishes and for microtiter plates

No additional chemicals needed to achieve an anaerobic / microaerophilic condition.



Touch screen Display protected with security password.

Touch screen display allows controlling modified purging and vacuum time by end user.

User friendly, through programmable touch screen display, automatically managed draining and filling of gases, Pressure of gases, Identifying Leakages in the attached anaerobic jars



Capable of identifying nonfunctioning catalyst

Simple assembly, easy to connect from Jar to System & Disconnect (Vice Versa).

Having colour code indications on Touch Screen for stop the cycle, user friendly, so that user can take the necessary actions and start the cycle again

Alternative gases like Nitrogen or gas like combination of CO2, N2 or Co2, N2 with 5 % H2 can also be connect, having Multifunctional ability to connect, provide with upgraded system

Microaerophilic condition 0% to 21% of Oxygen.


Gas environment created in the jar will be exact and reproducible with less than 0.5% deviations.

Certifications:

- **NSIC Certification**
- **CE Marked product**
- **ISO 9001 : 2015**
- **GMP Certified**
- **European Conformity CE Compliance**
- **ISO 13485: 2016**
- **EN 12469 : 2000**





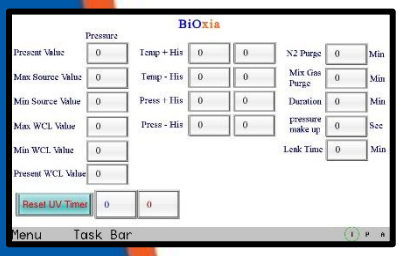



TECHNICAL SPECIFICATIONS:-

Dimensions (W /D / H): 200 mm X 400 mm X 350 mm

Power Supply: 230V

Gas Supplies: N2 and ANO2 (CO2 : H2 : N2) (10 : 5 : 85)

Pressure: 150 kg / cm2

Touch Screen Display: HMI Type L 90 mm x D 50 mm

Weight: 6.4 kg

Power Supply: 230 V

Salient Features:-

- Quick & Convenient Solution
- Anaerobic Condition achieved within 1 Minute
- Touch Screen LCD Display
- Provided with One button start and reset operation
- Inbuilt alphanumeric key board
- User Friendly
- Simple Assembly with Alternative Users Option
- Multiple programming cycles we can set
- Having a special features for the end user to program and set on display to create desired environment whether Anaerobic or Microaerophilic in the jars
- USB communications port, 5 days continuous storage of event log data, Having Enough Memory to store more than 50 Program
- Equipment come with a feature to use Reusable catalysts as well as Single Use (Disposable) Catalysts
- Data interface software which is compatible with LAN System
- System will also be able to work with Bar Code and Printer

Prevention of Microbial Contamination of Jars

Having provision to fix filter for prevention of Microbial Contamination of the laboratory environment

Upgradability:

On Full upgradation, Anaerobic Jar Filling System will provide connection for 3 Jars and 1 Gas and a basic equipment will work with single jar or Single Gas Connection

BiOxia

Address:
H-7, Rajalaxmi Commercial Complex, Ground Floor, Kalher, Tal- Bhiwandi, Dist.- Thane 421302.
Email: bioxia.in@gmail.com
Website: www.bioxia.co.in