Anaerobic Workstation

Model: A-300



BiOxia

www.bioxia.co.in

Anaerobic A300

Construction: Durable, Non-Corrosive, Hard, Opaque sheet of Acrylic Resin of 6 to 8 mm thickness for entire body with 15mm laminated end panels for exceptional rigidity, except front panel of 8 mm thick similar acrylic resin but transparent sheet, for better visibility and insulation.

Size: External : 900 X 700 X 575

Internal : 650 X 475 X 475

Interlock : 200 X 250 X 250

Main Workstation Capacity:

a) Up to 400 plates of 90mm X 15mm
b) Additional inoculation space for regular working

Interlock Capacity:

a) Integral interlock (Airlock) transfer up to 25 plates of 90 mm x 15 mm
b) Auto interlock cycle
c) 35 seconds of Interlock cycle time



Leak proof arrangement from front-transparent-panel, for access inside chamber, for easy & comfortable handling/operation inside chamber

Easy Sleeves Gloves Systems

Removable front panel so the bulky instruments & samples are easily possess inside the chamber & easy to clean.

Ergonomically designed 10% slope front viewing panel for more comfort & easy to load & unload of work into the chamber.

To make the chamber oxygen-free at faster rate & maintain anaerobic condition, additional facility to the workstation atmosphere using Palladium Catalyst, is provided

Integral interlock (Airlock) features system with automatic commissioning cycle.

User friendly fluorescent light for illumination fixed in such a way that no direct exposure on the face of the end user.

Transfer quickly single petri plate through single plate entry system.

2 No. of electrical power socket inside the chamber to operate small instruments inside the chamber.

Safety Features:

Excess pressure relief valve, to release excess pressure inside the chamber & automatically maintain chamber pressure

Temperature overshoot controller.

Automatic Humidity Control dehumidification system

Heating element along with controller to maintain inside chamber temperature with 25° C to 45° C, and temperature uniformity of ±0.5° C and relative humidity up to 90% facility for temperature overshoot controller.


Operating temperature control range from 5°C above ambient to 48°C, in ± 5°C accuracy.

Audio / Visual Alarm for Low Gas, gas cylinder pressure, chamber pressure and temperature

Utility port with flexible hose for manual purging by nitrogen, inside the chamber operated by shoot switch outside chamber similar Foot Switch provided for operation for gas nozzle ports & spot lamp inside chamber.

The workstation with two access ports for operation without using sleeves/gloves.

LCD Display with Touch Screen Controller with password protection:

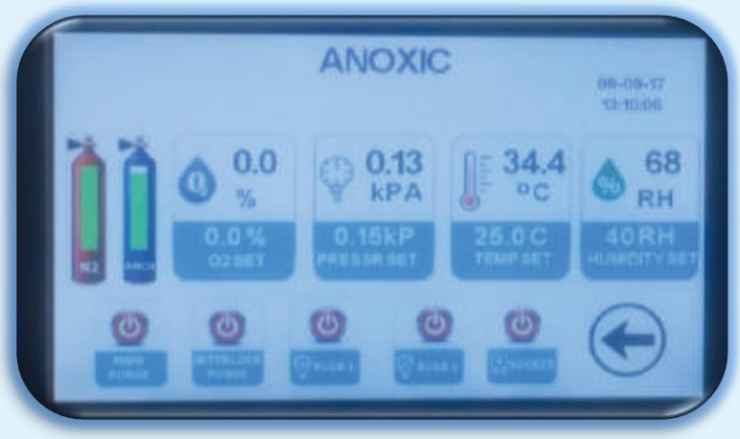

Touch Screen LCD Display

• Continuously display & controlled oxygen in the chamber	• Continuously show Chamber Pressure
• Oxygen Controlled with display 0.0% to 22.0 %	• Continuously show Humidity
• Continuously show Temperature	• Continuously show energy saving fluorescent lamp for perfect illumination
• Continuously show indication of Internal Socket	• Continuously Indicate Positive Pressure (0.15 KPA/0.0015 bar) of the main chamber

Said Touch Screen to simplify the calibration process:

I) Automatically calibrates O2 Sensor through one touch screen control

II) Facilitates to download the data of the event log with date & time for at least 30 days through USB port for Humidity, Oxygen & Chamber pressure.

Gas Control Software for:

USB Communications Port – 1 month continuous storage of event log data

One touch calibration (O2), on screen fault assistance, cycle programming

Gas Supply: Inlet Options for Two Separate gases – one for premixed anaerobic gas & another one for Nitrogen gas & Exceptionally low gas consumption

Foot Switch: Foot switch operated high intensity halogen lamp for close inspection of samples

Electric Supply: 230 V – 50 Hz

Cable Ports: 2 Nos. of cable port (approx. 50 mm dia.) to allow cable inside the chamber without disturbing the internal atmosphere.

Certifications: Installation Qualification (IQ), Operational Qualification (OQ) and Performance Qualification (PQ) and perform these activities at the user's site. The hard and soft copies of these documents provided.

Warranty: 3 years comprehensive warranty & 2 years of AMC.

Additional Accessories:

Mix Gas Cylinder with Certificates	1 No.	Double Stage Regulator	3 Nos.
Nitrogen Gas Cylinder with Certificates	2 Nos.	Stabilizer	1 No.
Palladium Catalyst	2 Nos.	O2 and moisture traps	1 No.
Gas Pipeline	1 Set	Support stand (platform)	1 No.
Manual	1 set	Gas leak detector	1 No.
Maintenance tool kit	1 set		


ISO 9001 : 2015 Certified

CE Marked : CE marked product


GMP Certified

Applicable Standards : EN ISO 14971:2012, EN ISO 13485 : 2012 , EN 980:2008 , EN 1041 : 2008 , EN 61010-1:2010, EN 61326-1:2013, EN 12469:2000


Touch Screen Display

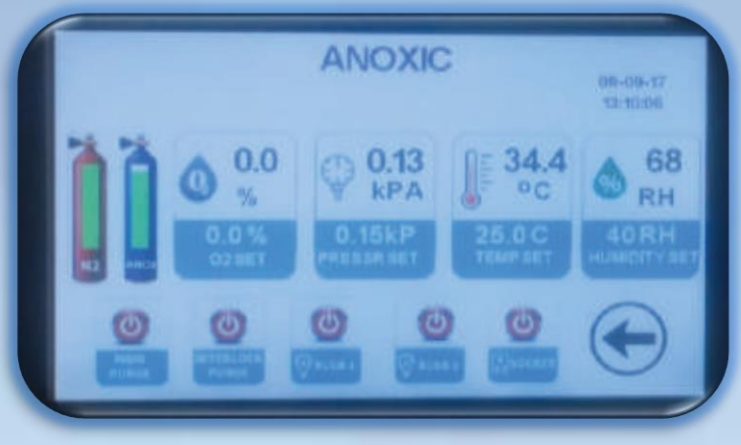

Data Logging Facility

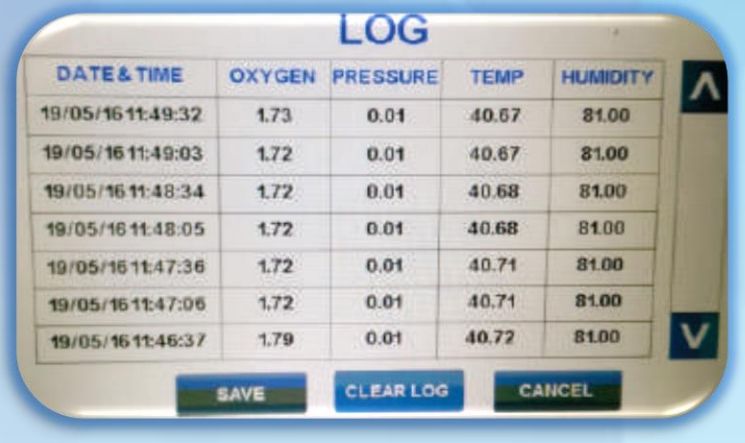


Calibration of Oxygen

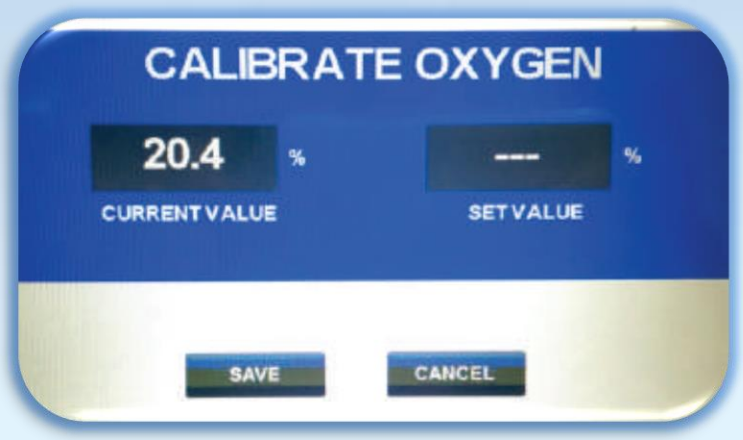



Settings

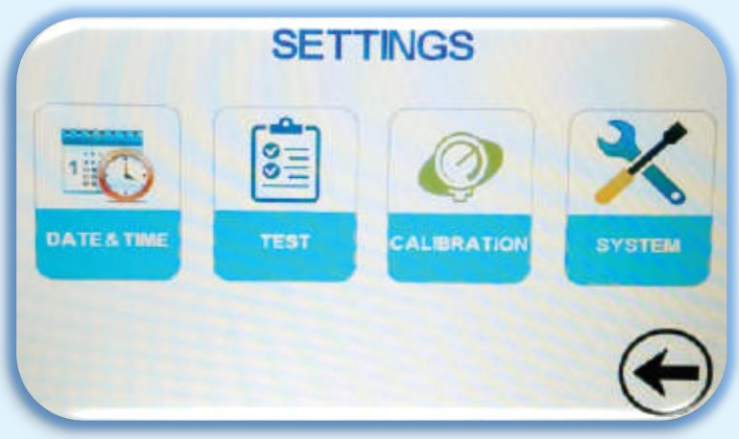

"Flexible hose" One Utility Connection Port




Interlock Transfer



Condensing Cooling Plate



Spot Lamp

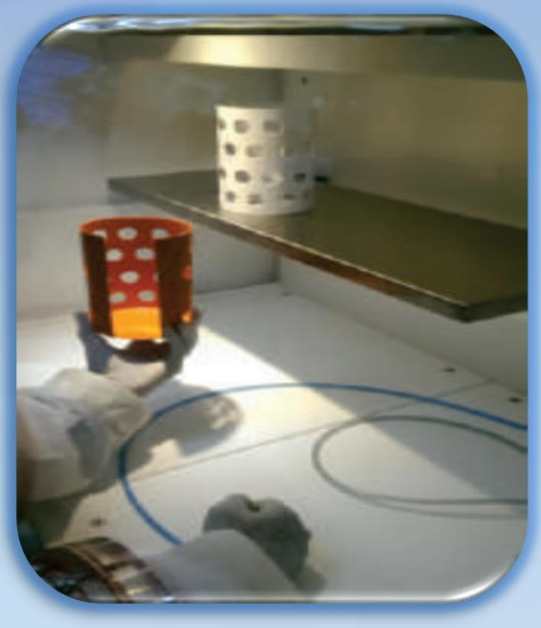

Foot Switch



Bare Hand Facility




Petri Dish Holders



Gloves



Catalyst & Detox Pouch

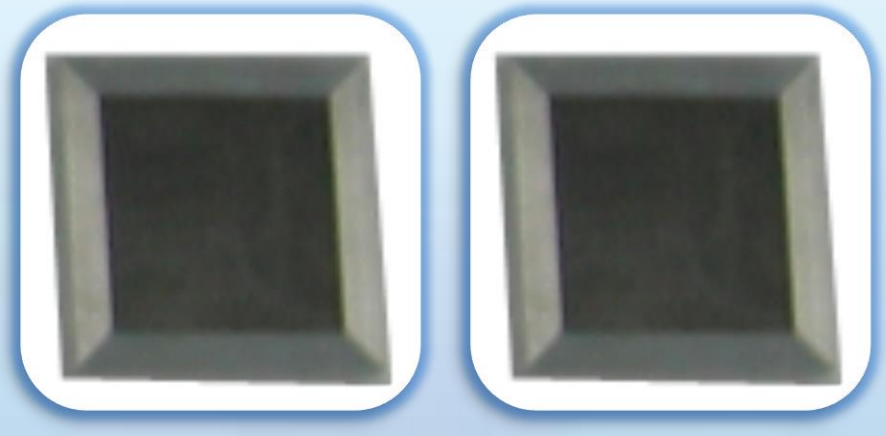

PRODUCT SUMMARY

PRODUCT SUMMARY OF WORKSTATION

MODEL	A300
Max Plate Capacity	400
Interlock Plate Capacity	25
Interlock Cycle Time	35s
Cabinet Mode of Construction	Solvent bonded Acrylic
Max Incubation Temperature	48° C
Gas Supply	Mixed Gas 5% H2 + 5% Co2 + 90% N2 / 99% N2 gas
Humidity control	√
Condensate Control	√
Positive Pressure Display	√
Safety Excess Pressure Relief Valve	√
Low Gas Alarm	√
Inspection Spot Lamp	√
Fluorescent Illumination	√
Palladium Catalyst	√
Activated Carbon Particles	√
Oxygen Sensor with Display	√
Oxygen Controlled with Display 0.0% to 22.00%	N/A
Ultra Violet (UV) Light	O
Bare Hand Facility	O
Incubator	N/A
Foot Switch Operation	√
Removable Front	√
Internal Power Supply	√
Utility nozzle Connection	√
LCD Display with control	√
Fan Unit	√
Adjustable Shelf	O
Cabinet Stand	O
Regulator for Cylinder	√
Pair of Gloves	√
Vacuum Line Port	√
Cable Gland Port	√
Petri Dish Holder	√

√ - Available O - Optional N/A - Not Available

Work Address: H-7, Rajalaxmi Commercial Complex, Ground Floor, Kalher, Tal- Bhiwandi, Dist- Thane 421302

Email: bioxia.in@gmail.com | Website: www.bioxia.co.in