HYPOXIA WORKSTATION



Model: H-300

BiOxia

www.bioxia.co.in

Hypoxia Workstation H-300

Construction:

Durable, Non-Corrosive, Opaque sheet of Acrylic Resin of 6mm or 8mm thickness for entire body, except front panel of acrylic resin but transparent sheet, for better visibility and insulation.

Dimensions : L X H X D (approx.)

External : 900 X 740 X 660
Main Chamber : 650 X 500 X 500
Inter lock : 250 X 300 X 300

Main Workstation Capacity:

a) Up to 350 of 96 well plates
b) Additional inoculation space for regular working
c) One supply ports inside the chamber

Interlock Capacity :

a) Interlock transfer Up to 25 plates of 90mm X 15mm
b) Auto Inter lock cycle
c) Interlock Cycle Time : 25 S

Oxygen Controlled with Display :

0.0 % to 25.00 %

CO2 Controlled with Display :

0.0 % to 30.00 %

LCD Display with touch screen Controlled :

1) LCD display should continuously indicate Positive pressure (0.15 KPN0.0015 bar) of the main chamber.
2) Visual alarm for low or excess oxygen level.
3) Visual alarm for gas cylinder pressures, chamber pressure and temperature.
4) Visual alarm for Water Level Indicator on Touch screen.

Safety Features :

Excess pressure relief valve.

Temperature overshoot controller.

Condensate controller technology inbuilt in the workstation

To make the chamber controlled oxygen, automatic forced purging system for Main Chamber, with adjustable purging period.

To achieve the chamber oxygen faster rate, additional facility to condition the workstation atmosphere using proper direction of internal air, should be provided

Pressure relief valve for releasing excess pressure inside chamber, will be provided

LCD Display with touch screen Controlled:

Chamber pressure

Blower

Temperature

Fluorescent Light

Low gas alarm with indicator on screen.

LCD display continuously indicate percentage of oxygen in the chamber

Internal Socket indication continuously present on the screen

LCD display continuously indicate Positive pressure (0.15 KPA/0.0015 bar) of the main chamber.

Visual alarm for low or excess oxygen level will be provided

Visual alarm for gas cylinder pressures, chamber pressure and temperature will be provided

Said Touch Screen display should continuously indicate & controls:

(I) Controls O2 from 0.0% to 20.9%in 0.1% increments

Said Touch screen simplifies the calibration process:

(I) Automatically calibrates O2 sensor through one touch screen control.

(II) Provides rapid equalization.

(III) Facilitates the download of data.

(IV) Provides Faculty Recognition

Said Touch Screen display allows Microaerophilic cycling:

Facilitating up to 4 different O2

Concentrations through a user-defined sequence of time

Oxygen sensor shall be present out of main working chamber

Positive pressure (0.15 KPA/0.0015 bar) of environment, to continuously maintained inside the incubation chamber.

Auto excess pressure control system

The front 10% slope viewing panel

Heater for dehumidification

Heating element along with controller shall be provided to maintain the temperature inside chamber within ambient to 45°C, with Temperature Uniformity ± 1° C at 37°C

Inbuilt Trim-point for temperature calibration will be provided

Temperature ambient to 45 deg C.

Temperature Controlled with Display.

Inbuilt Trim-point for temperature calibration.

Humidity controlled with display.

Additional, Utility port with “flexible hose” for manual purging by Nitrogen, inside the chamber

Proper valve for purging, both for main chamber & Interlock chamber.

Workstation will be operated by foot switch outside chamber

Foot switch outside chamber for Purging & Spot lamp operation.

Activated Detox to absorb smell.

Inspection Spot-lamp

Inlet options for Two separate cylinders: N2 & O2

Pair of Gloves

Power Supply :

Power Input : 220 V-240V AC,50 Hz fitted with plug

Resettable Over current breaker fitted for protection

----------Calibration Oxygen----------






Touch Screen Display




Hypoxic Cycle

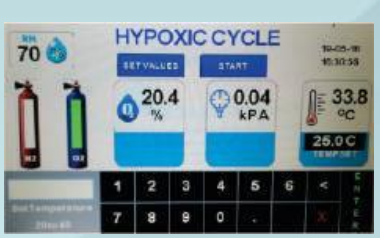

----------Data Logging Facility----------





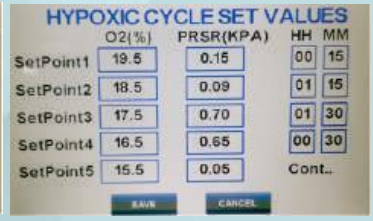

Co2 Controller



Flexible Hose



Interlock Transfer



Condensation Cooling Plate



Foot Switch



Hypoxia Workstation H-300

MODEL	H300
Max Plate Capacity	350
Interlock Plate capacity	25
Interlock Cycle Time	25s
Cabinet Mode of Construction	Solvent bonded Acrylic / Stainless Steel 304
Max Incubation Temperature	45° C
Gas Supply	Dual Gas (O2:100%, Co2: 100% & Nitrogen: 100%)
Humidity control	√
Condensate Control	√
Positive Pressure Display	√
Safety Excess Pressure Relief Valve	√
Low Gas Alarm	√
Inspection Spot Lamp	√
Fluorescent Illumination	√
Palladium Catalyst	√
Activated Carbon Particles	√
Oxygen Sensor with Display	√
Oxygen Controlled with Display 0.0% to 22%	√
Co2 Controlled with Display 0.0% to 30.0%	√
Ultra Violet (UV) Light	O
Bare Hand Facility	√
Incubator with four Shelf	N/A
Foot Switch Operation	O
Removable Front	N/A
Internal Power Supply	√
Utility nozzle Connection	√
LCD Display with control	√
Fan Unit	√
Adjustable Shelf	O
Anaerobic Chamber	√
Cabinet Stand	O
Regulator for Cylinder	O
Gloves	√
Vacuum Line Port	√
Cable Gland Port	√
Petri Dish Holder	√

√ - Available O - Optional N/A - Not Available

BIOXIA- H-7, Rajalaxmi Commercial Complex, Ground Floor, Kalher, Tal- Bhiwandi, Dist- Thane 421302

Email: bioxia.in@gmail.com | Tel. No.: 8655003624