ANAEROBIC JAR FILLING SYSTEM

- User Friendly
- Touch Screen LCD Display
- Quick & Convenient Solution
- Simple Assembly with Alternative Users Option
- Anaerobic Condition achieved within 1 Minute




BiOxia



ANAEROBIC JAR FILLING SYSTEM

- The Anaerobic Jar Filling System is develop so to achieve anaerobic atmospheric condition inside the Jar in less than 1 minute
- Create atmosphere suitable for the culture of anaerobic as well as Microaerophilic bacteria
- To achieve quick Anaerobic/Microaerophilic condition, used unique vacuum technology along with purging technology
- No additional chemicals are needed to achieve an anaerobic/microaerophilic condition
- Touch screen Display protected with security password
- Touch screen display allows to control modified purging and vacuum time by end user
- User friendly, through programmable touchscreen display, Automatically managed draining and filling of gases
- Simple assembly, easy to connect from Jar to System & Disconnect (Vice Versa)
- Contains alternative gases like Nitrogen or gases like combination of CO2 N2 or Co2 N2 with 5 % H2 can also be connect



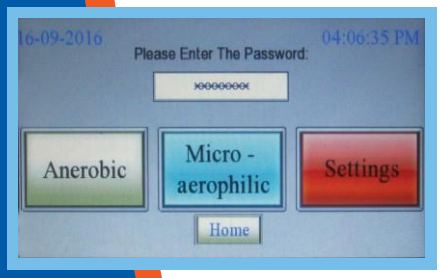





Specifications :

Gas Supplies -
N2 and ANO2 (CO2 : H2 : N2) (10 : 5 : 85)

Pressure : 150 kg / cm2

Touch Screen Display :
HMI Type L 90 mm x D 50 mm

Dimensions (W /D / H) :
200 mm X 400 mm X 350 mm

Weight : 6.4 kg

Power Supply : 230 V

BiOxia