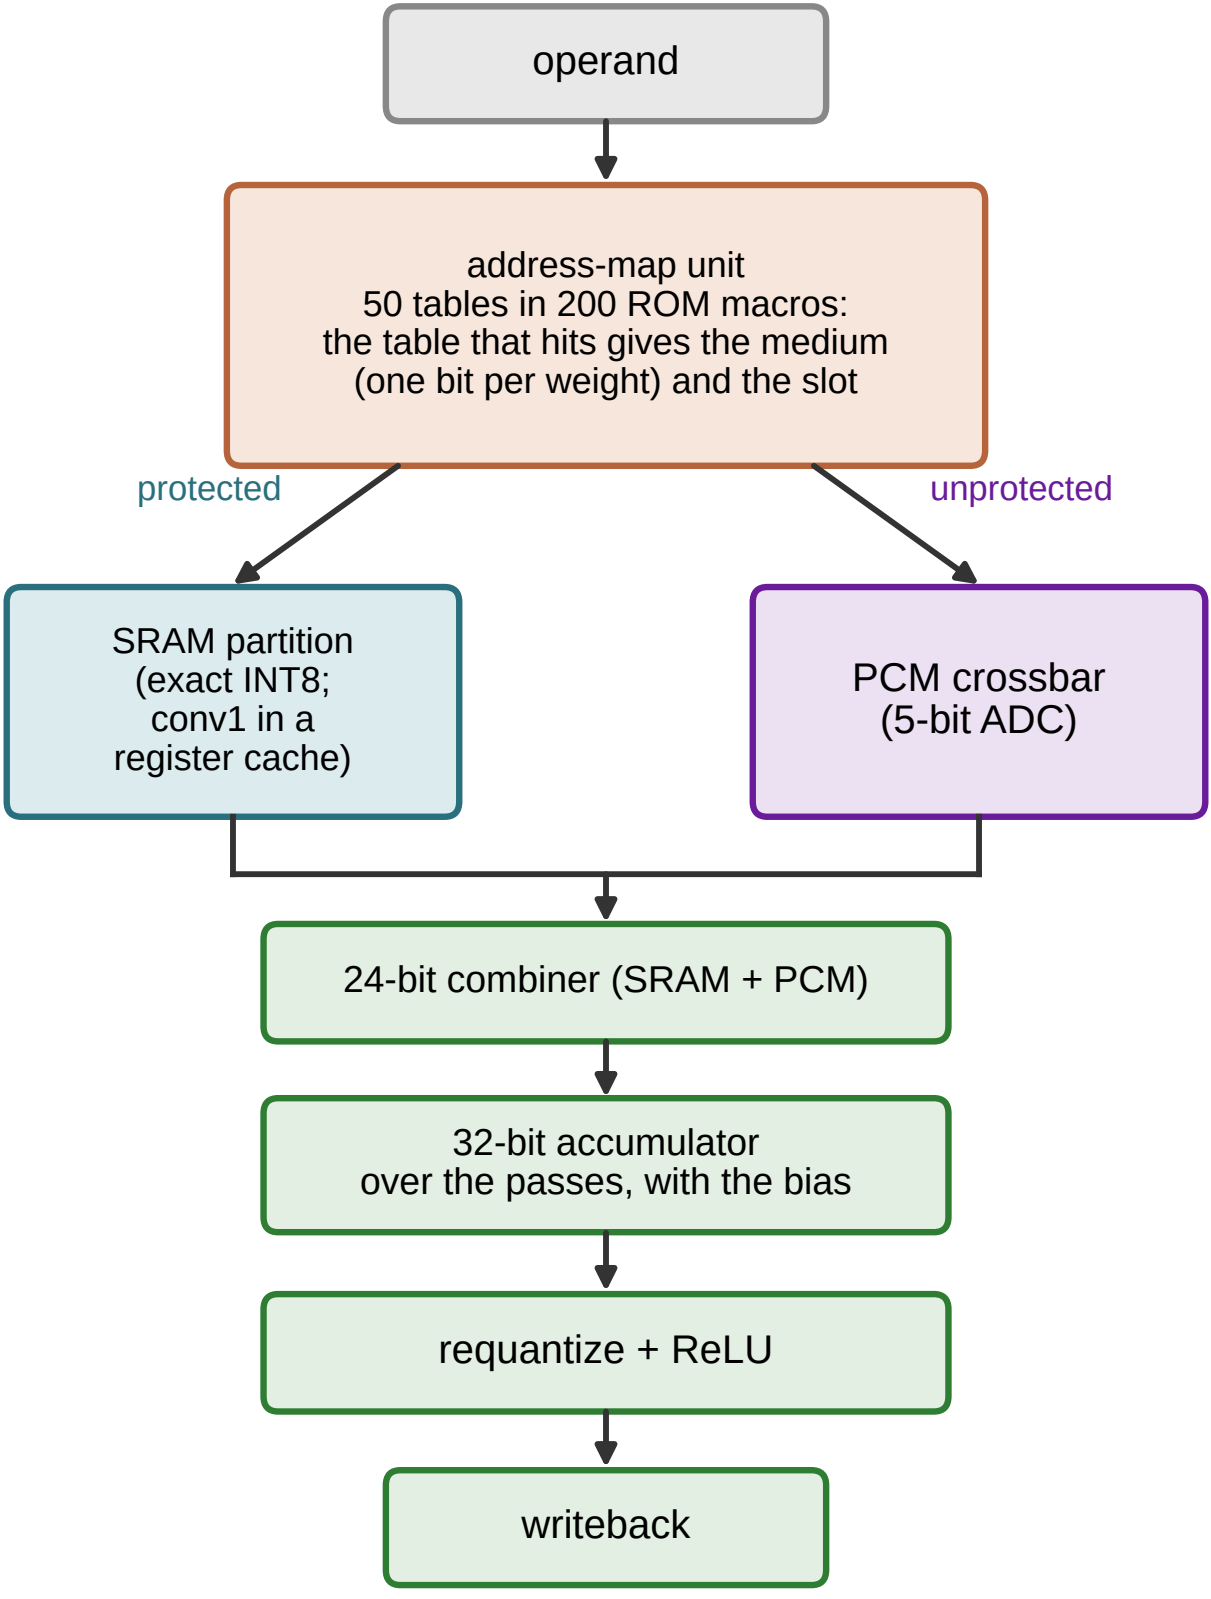
operand
address-map unit
50 tables in 200 ROM macros:
the table that hits gives the medium
(one bit per weight) and the slot
protected
unprotected
SRAM partition
(exact INT8;
conv1 in a
register cache)
PCM crossbar
(5-bit ADC)
24-bit combiner (SRAM + PCM)
32-bit accumulator
over the passes, with the bias
requantize + ReLU
writeback