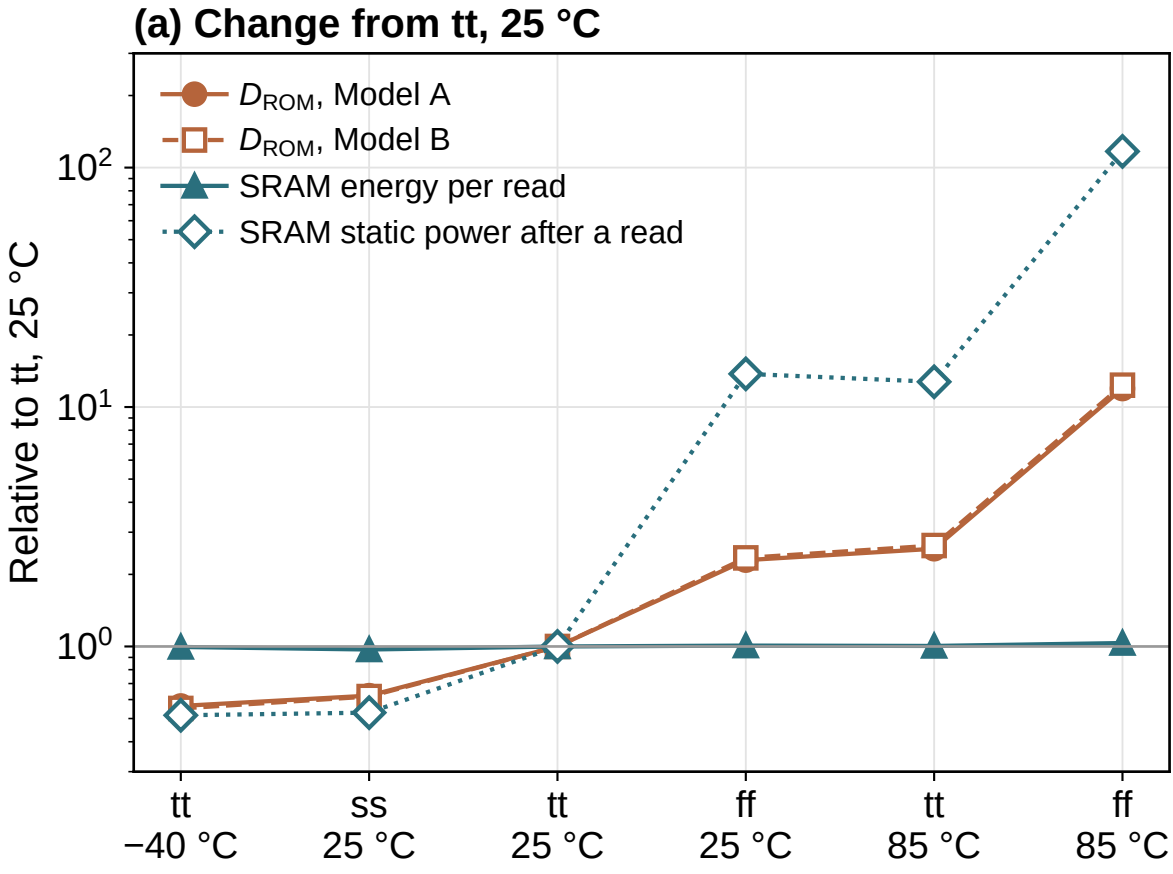
(a) Change from tt, 25 °C
D_{ROM}, Model A
D_{ROM}, Model B
SRAM energy per read
SRAM static power after a read
Relative to tt, 25 °C
10^2
10^1
10^0
tt −40 °C
ss 25 °C
tt 25 °C
ff 25 °C
tt 85 °C
ff 85 °C

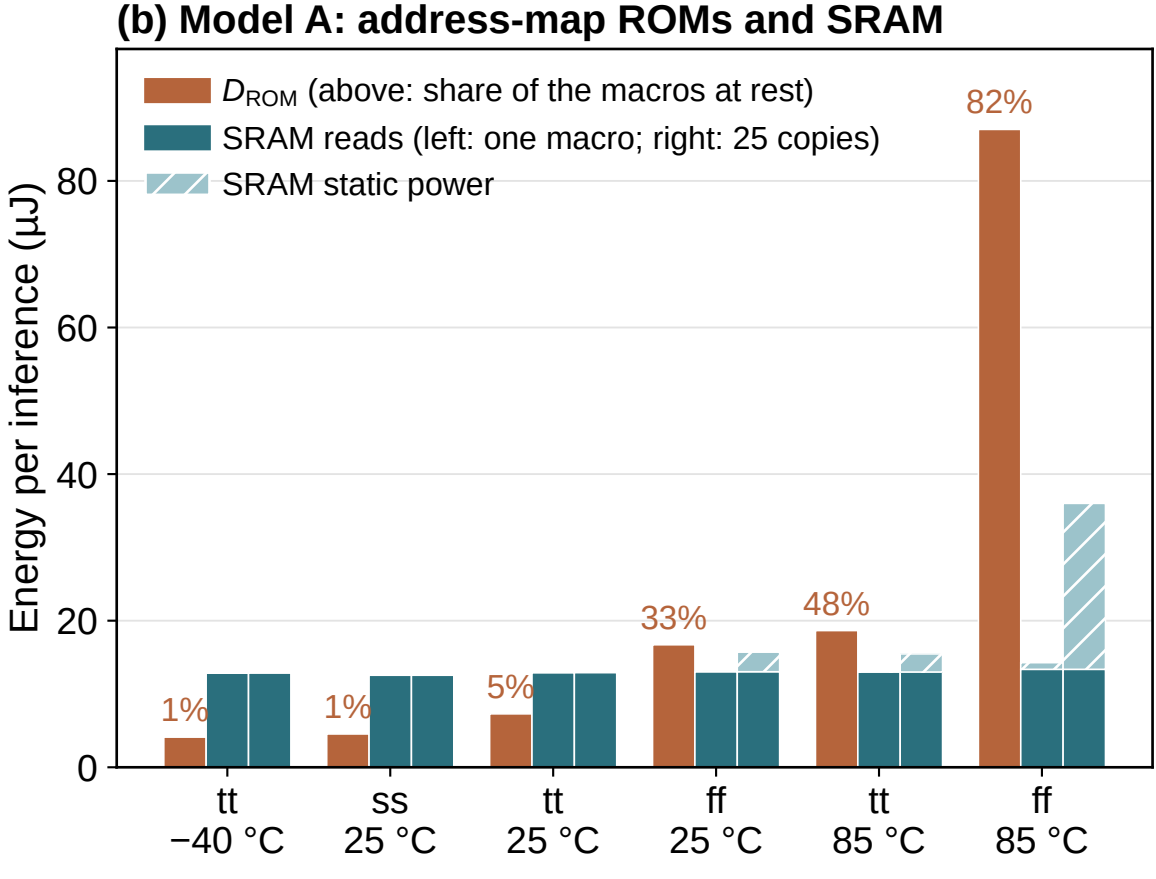
(b) Model A: address-map ROMs and SRAM
D_{ROM} (above: share of the macros at rest)
SRAM reads (left: one macro; right: 25 copies)
SRAM static power
Energy per inference (µJ)
0
20
40
60
80
1%
1%
5%
33%
48%
82%
tt −40 °C
ss 25 °C
tt 25 °C
ff 25 °C
tt 85 °C
ff 85 °C