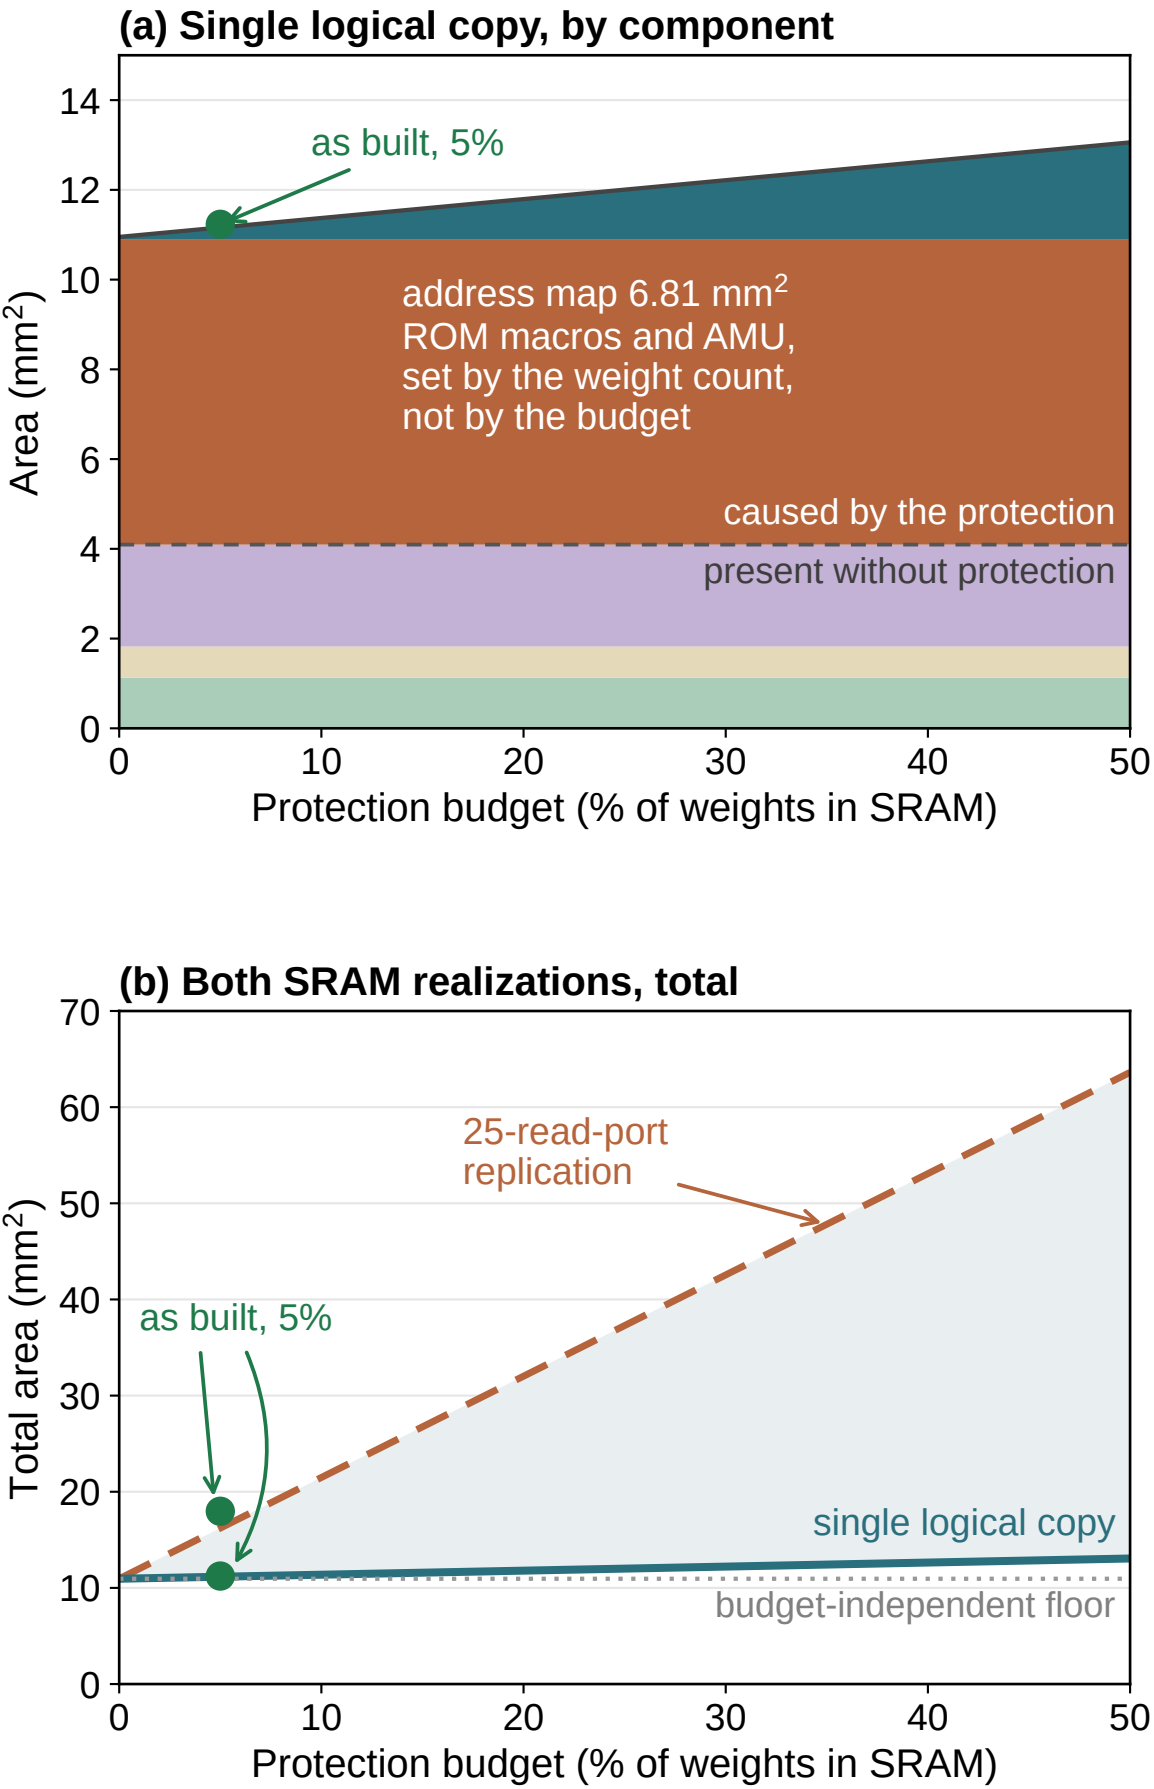
(a) Single logical copy, by component
Area (mm²)
Protection budget (% of weights in SRAM)
as built, 5%
address map 6.81 mm²
ROM macros and AMU,
set by the weight count,
not by the budget
caused by the protection
present without protection
(b) Both SRAM realizations, total
Total area (mm²)
Protection budget (% of weights in SRAM)
25-read-port
replication
as built, 5%
single logical copy
budget-independent floor
protected-weight storage
address map
PCM crossbar (fixed)
activation buffer, bias table
digital periphery