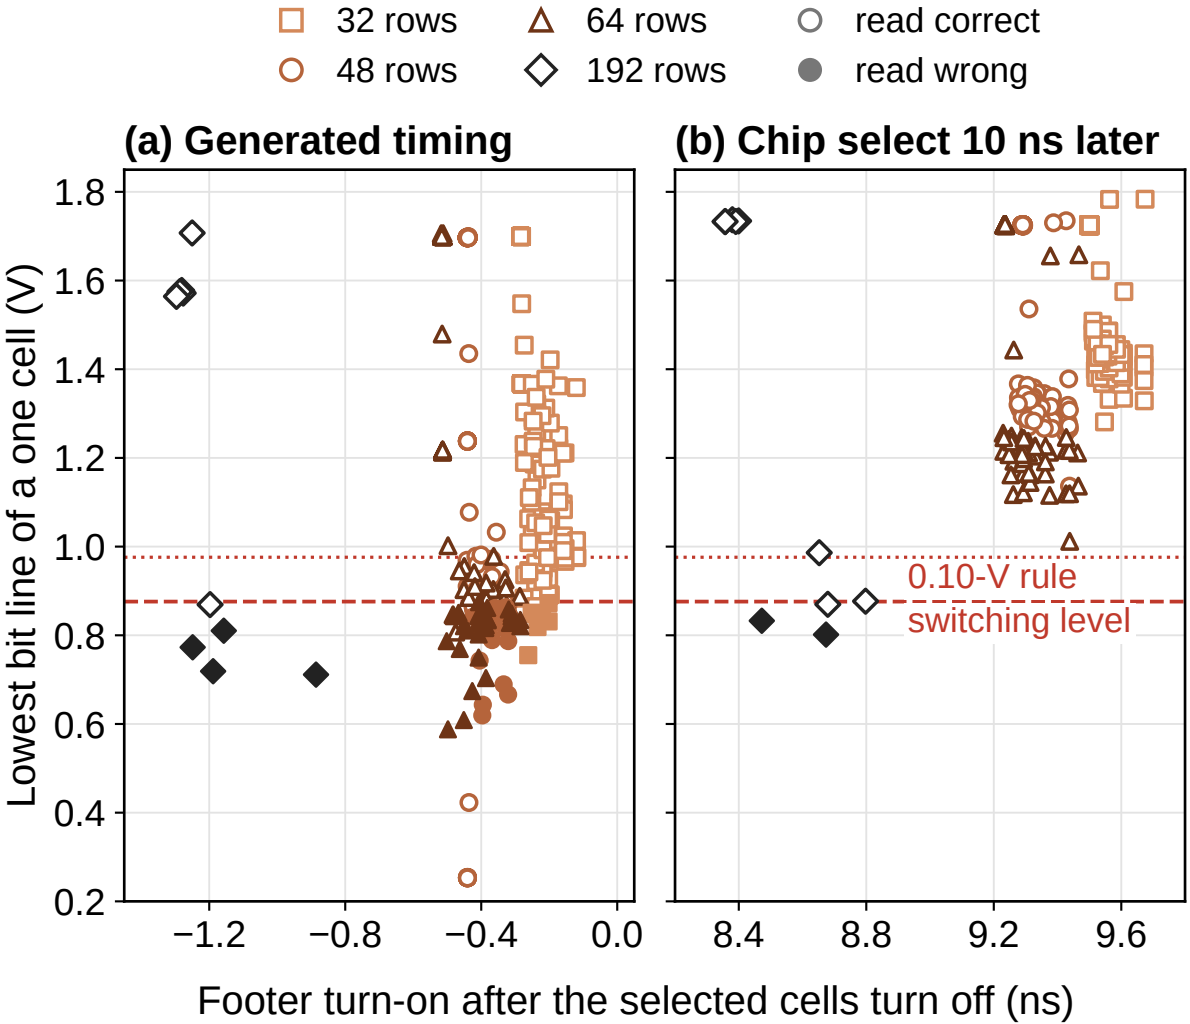
32 rows
48 rows
64 rows
192 rows
read correct
read wrong
(a) Generated timing
(b) Chip select 10 ns later
Lowest bit line of a one cell (V)
1.8
1.6
1.4
1.2
1.0
0.8
0.6
0.4
0.2
−1.2
−0.8
−0.4
0.0
8.4
8.8
9.2
9.6
0.10-V rule
switching level
Footer turn-on after the selected cells turn off (ns)