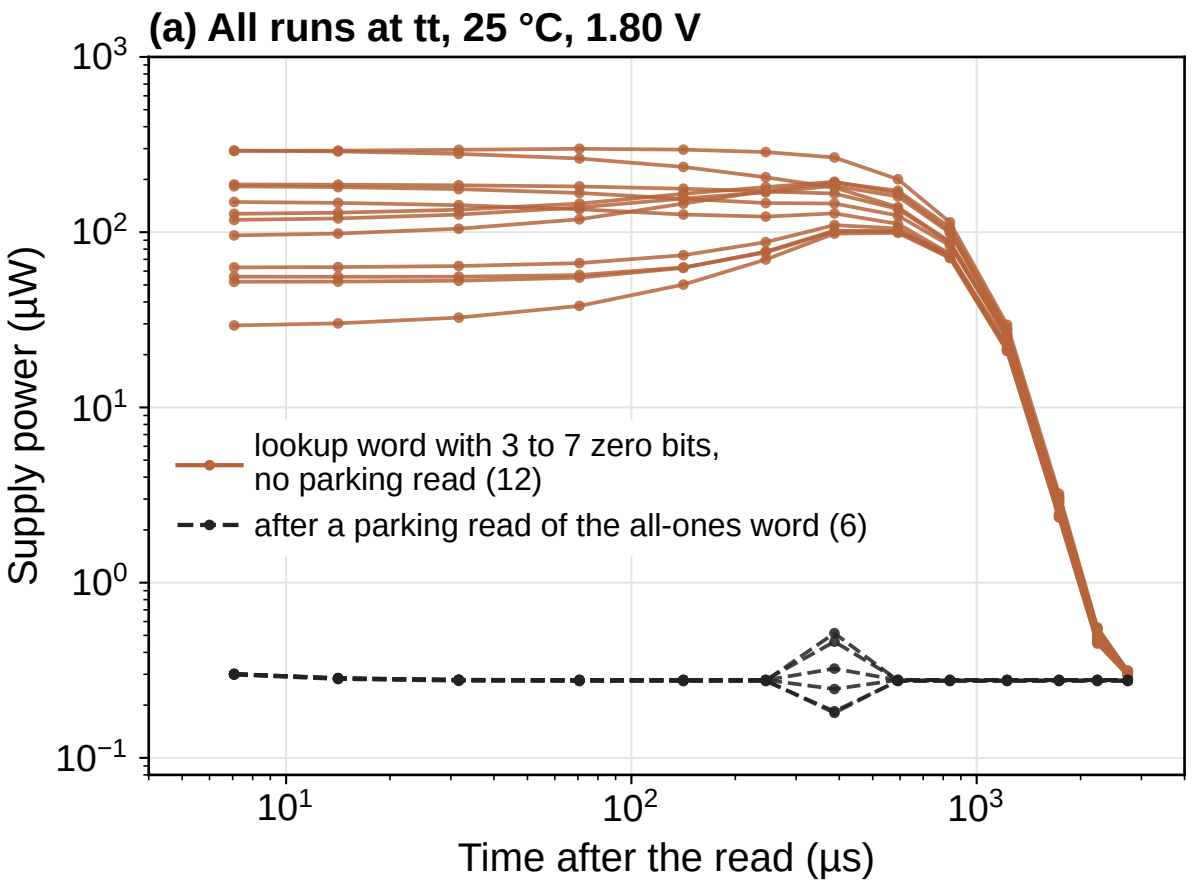
(a) All runs at tt, 25 °C, 1.80 V
Supply power (µW)
Time after the read (µs)
lookup word with 3 to 7 zero bits,
no parking read (12)
after a parking read of the all-ones word (6)

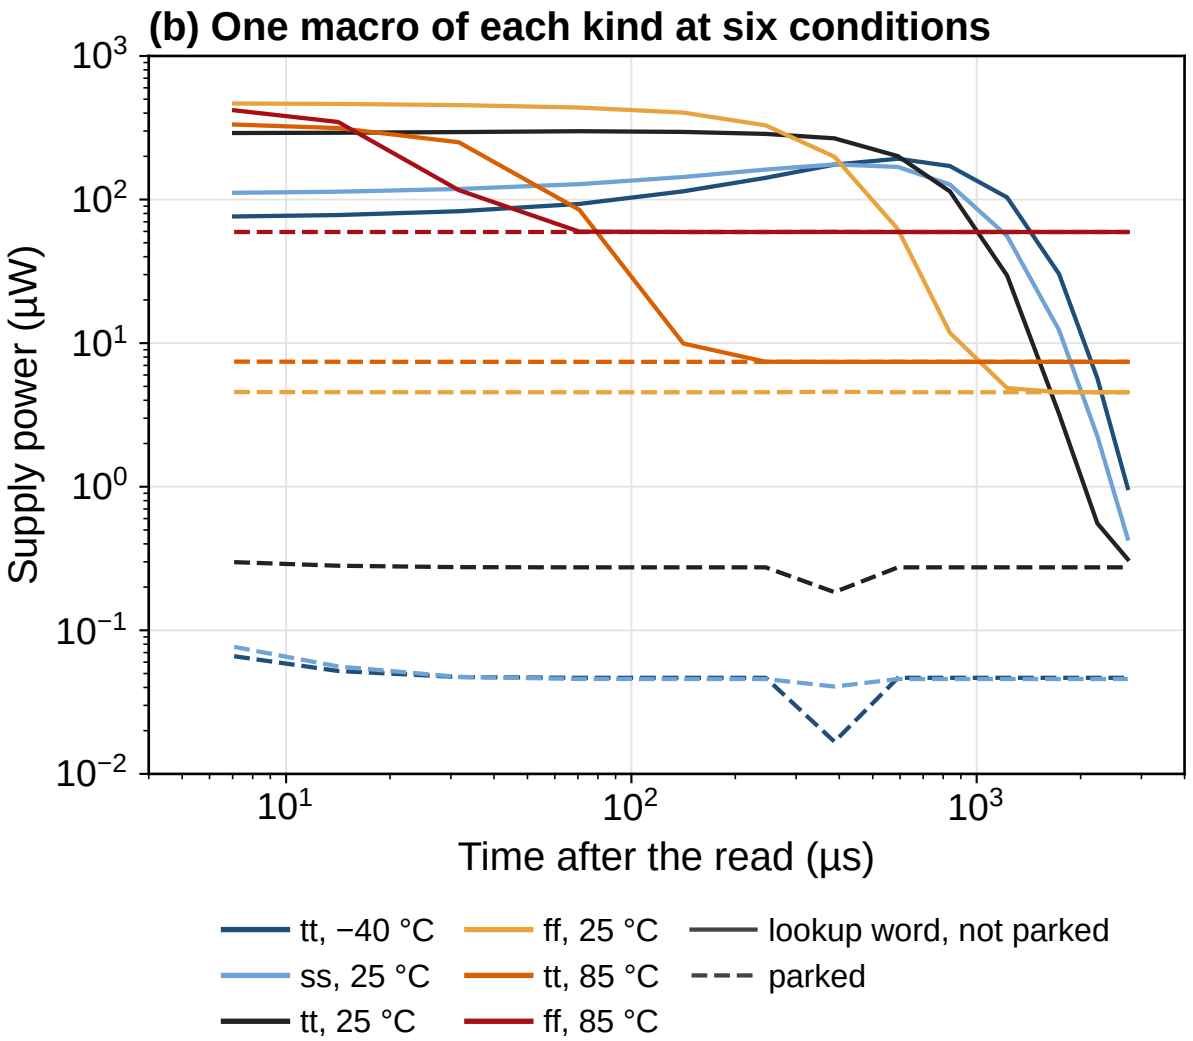
(b) One macro of each kind at six conditions
Supply power (µW)
Time after the read (µs)
tt, −40 °C
ss, 25 °C
tt, 25 °C
ff, 25 °C
tt, 85 °C
ff, 85 °C
lookup word, not parked
parked