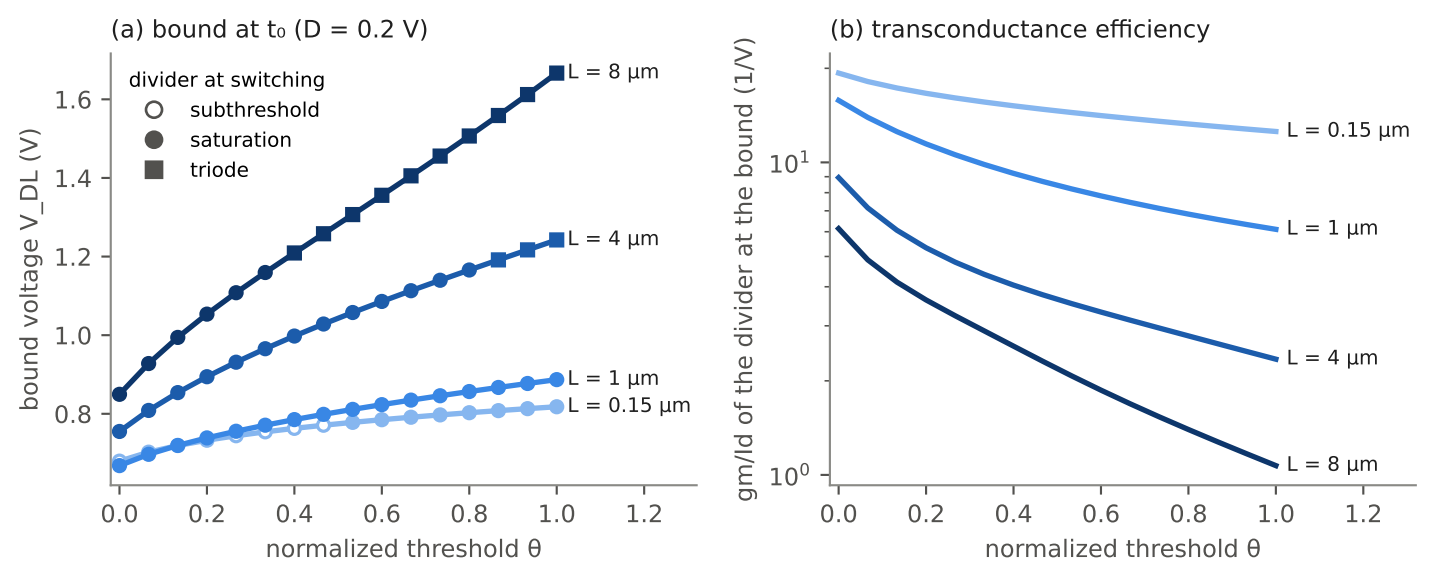
(a) bound at t₀ (D = 0.2 V)
divider at switching
subthreshold
saturation
triode
L = 8 µm
L = 4 µm
L = 1 µm
L = 0.15 µm
bound voltage V_DL (V)
normalized threshold θ
(b) transconductance efficiency
gm/Id of the divider at the bound (1/V)
normalized threshold θ