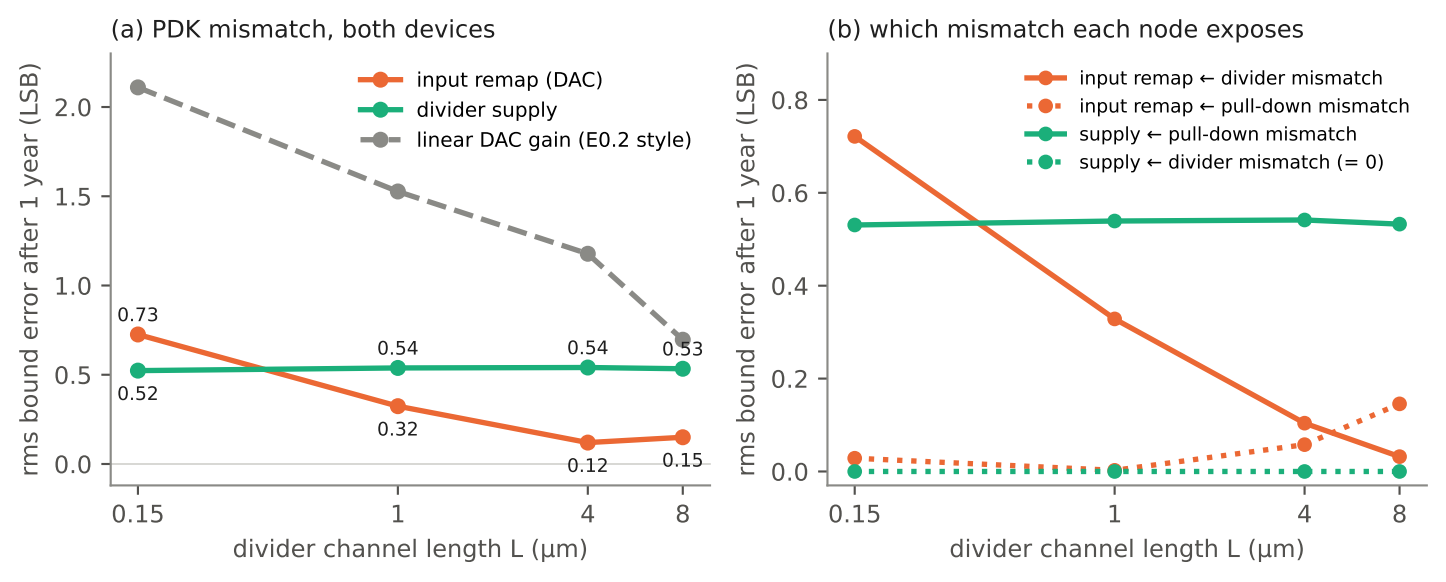
(a) PDK mismatch, both devices
input remap (DAC)
divider supply
linear DAC gain (E0.2 style)
rms bound error after 1 year (LSB)
2.0
1.5
1.0
0.5
0.0
0.73
0.54
0.54
0.53
0.52
0.32
0.12
0.15
0.15
1
4
8
divider channel length L (µm)
(b) which mismatch each node exposes
input remap ← divider mismatch
input remap ← pull-down mismatch
supply ← pull-down mismatch
supply ← divider mismatch (= 0)
rms bound error after 1 year (LSB)
0.8
0.6
0.4
0.2
0.0
0.15
1
4
8
divider channel length L (µm)