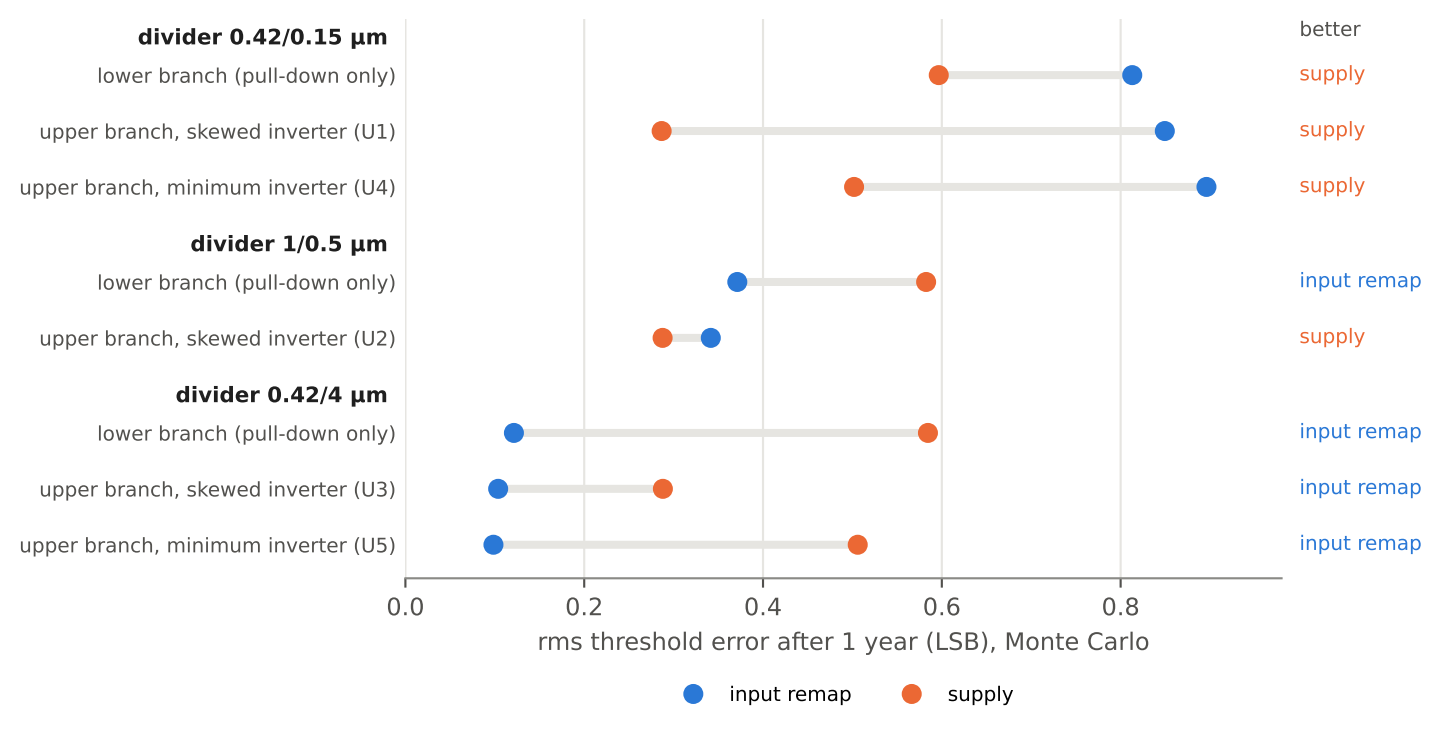
divider 0.42/0.15 µm
lower branch (pull-down only)
upper branch, skewed inverter (U1)
upper branch, minimum inverter (U4)
divider 1/0.5 µm
lower branch (pull-down only)
upper branch, skewed inverter (U2)
divider 0.42/4 µm
lower branch (pull-down only)
upper branch, skewed inverter (U3)
upper branch, minimum inverter (U5)
better
supply
supply
supply
input remap
supply
input remap
input remap
input remap
0.0
0.2
0.4
0.6
0.8
rms threshold error after 1 year (LSB), Monte Carlo
input remap
supply