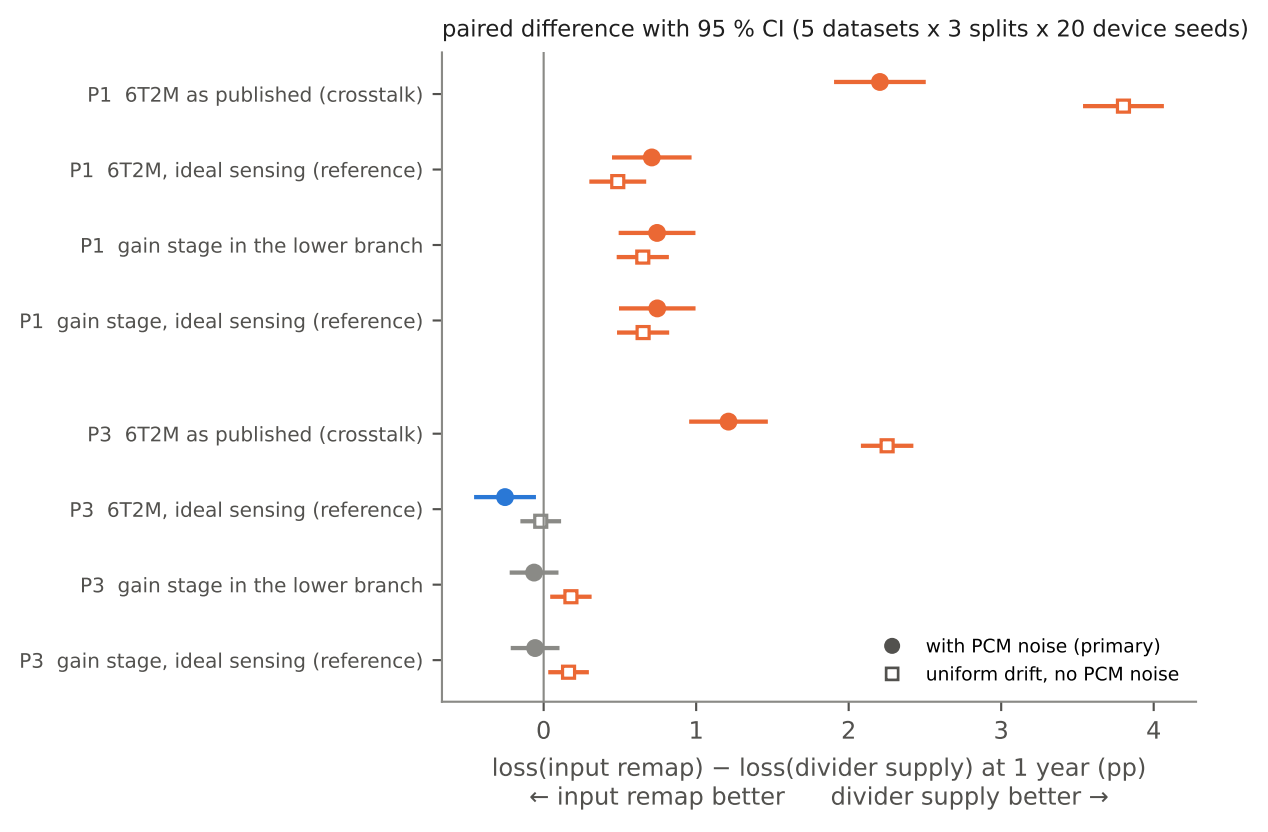
paired difference with 95 % CI (5 datasets x 3 splits x 20 device seeds)
P1 6T2M as published (crosstalk)
P1 6T2M, ideal sensing (reference)
P1 gain stage in the lower branch
P1 gain stage, ideal sensing (reference)
P3 6T2M as published (crosstalk)
P3 6T2M, ideal sensing (reference)
P3 gain stage in the lower branch
P3 gain stage, ideal sensing (reference)
with PCM noise (primary)
uniform drift, no PCM noise
0
1
2
3
4
loss(input remap) − loss(divider supply) at 1 year (pp)
← input remap better
divider supply better →