HONEST®
DECOR PVT. LTD.

GUJARAT.

FOLLOW ON :

DESIGN BY : EAGLE EYE | 99245 17528

6H
100% PURE
ACRYLIC

ACRYLIC



WIDE RANGE WIDE FINISH

CANVASS
ACRYLIC COLLECTION

100% PURE ACRYLIC



BOLD ESSENCE

Uncover a surface that speaks strength and subtlety in every layer.



Marbique Flutara (3 mm)



4201-MF ★★★★★



4202-MF ★★★★★



4107-VL ★★★★



4101-VL ★★★★



4102-VL ★★★★



4103-VL ★★★★

URBAN SOUL

Modern moods meet natural warmth – crafted for today's lifestyle.






4010-AM ★★



4012-AM ★★




4014-AM ★★

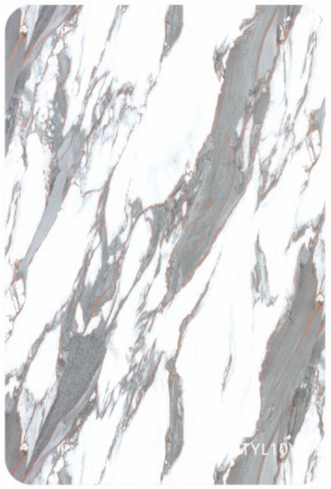

4015-AM ★★



4011-AM ★★

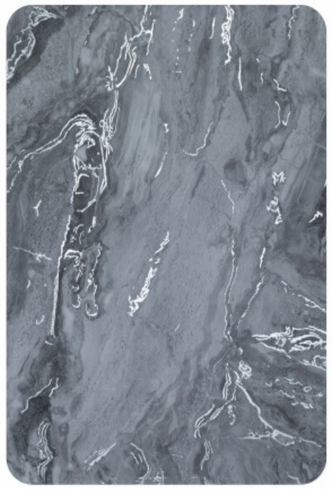

4013-AM ★★


100% PURE ACRYLIC



2301-SV ★



2302-SV ★

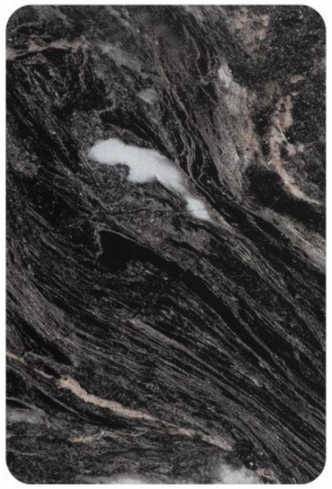


2303-SV ★





2305-SV ★

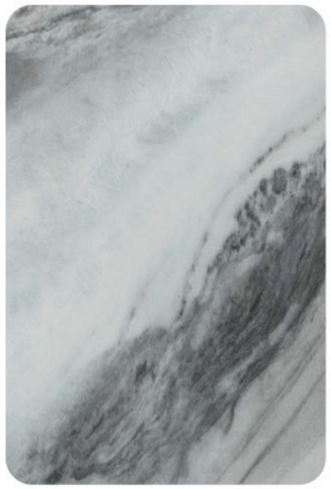

2306-SV ★




2307-SV ★

100% PURE ACRYLIC



NATURE TOUCH


Experience textures inspired by earth, reimagined for modern living.

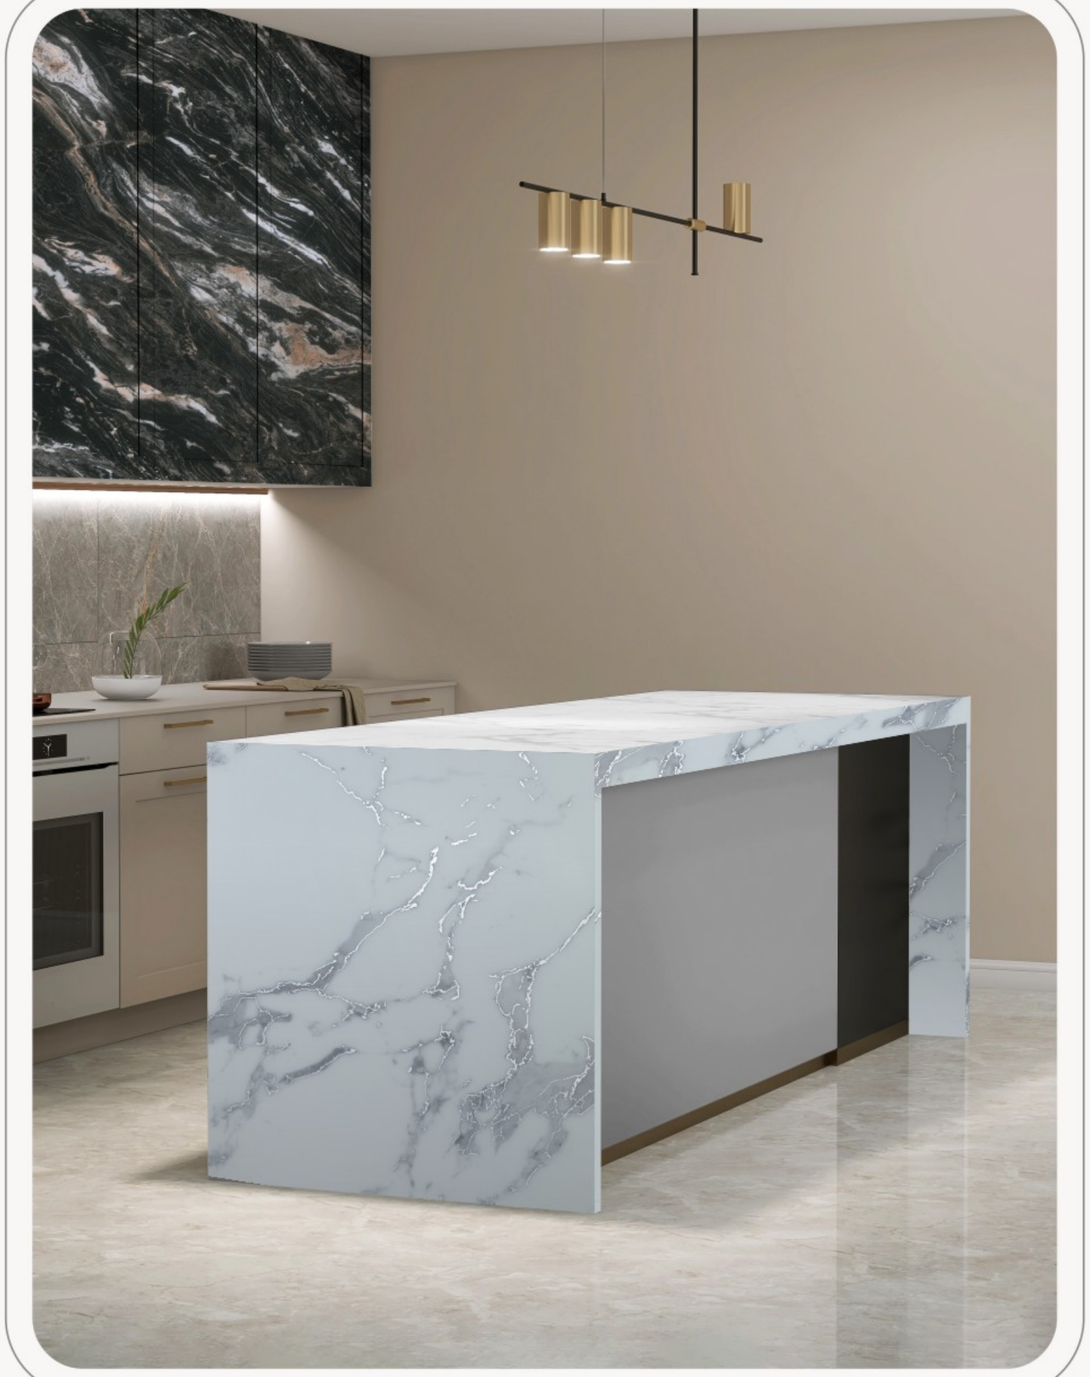

Matt Marble

100% PURE ACRYLIC

1.5 MM THICKNESS · ANTI SCRATCH · COLOUR CONSISTENCY · ANTI FINGERPRINT

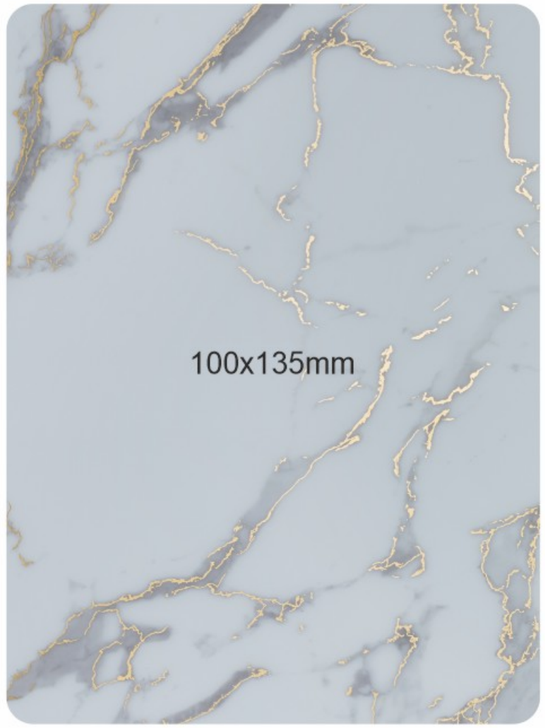


4501-MM ★★★



4502-MM ★★★



4503-MM ★★★

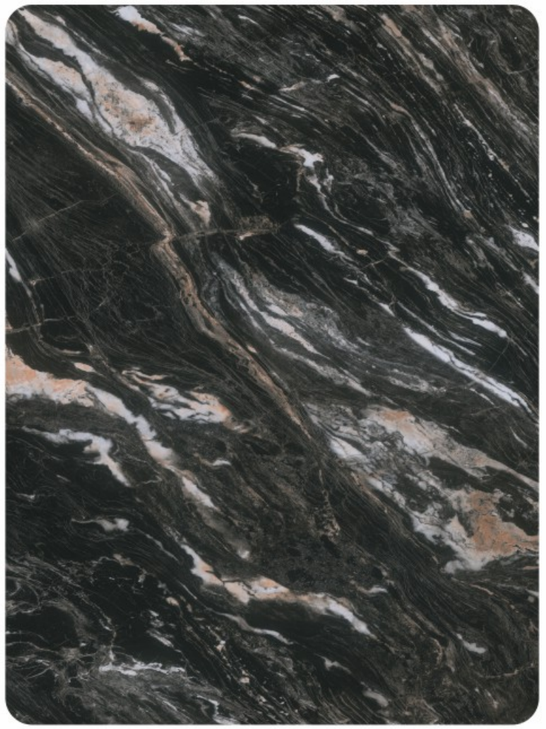

4504-MM ★★★

100% PURE ACRYLIC

1.5 MM THICKNESS · ANTI SCRATCH · COLOUR CONSISTENCY · ANTI FINGERPRINT

4331-MT ★★

4332-MT ★★

60x90mm

4333-MT ★★

4324-MT ★★

4325-MT ★★

4329-MT ★★

4326-MT ★★



MODERN GRACE

Elegance redefined through refined textures and timeless appeal.



4330-MT ★★

4327-MT ★★

4322-MT ★★

4323-MT ★★

4321-MT ★★

60x90mm

157

4334-MT ★★

4328-MT ★★

Vibrant Hues

60x90mm

139

1001-VH

102

1002-VH

103

1042-VH

112

1010-VH



104

1003-VH

114

1011-VH

157

1044-VH

119


1012-VH

100% PURE ACRYLIC



DESIGN FLOW

Every curve, every color - created to move with your vision.

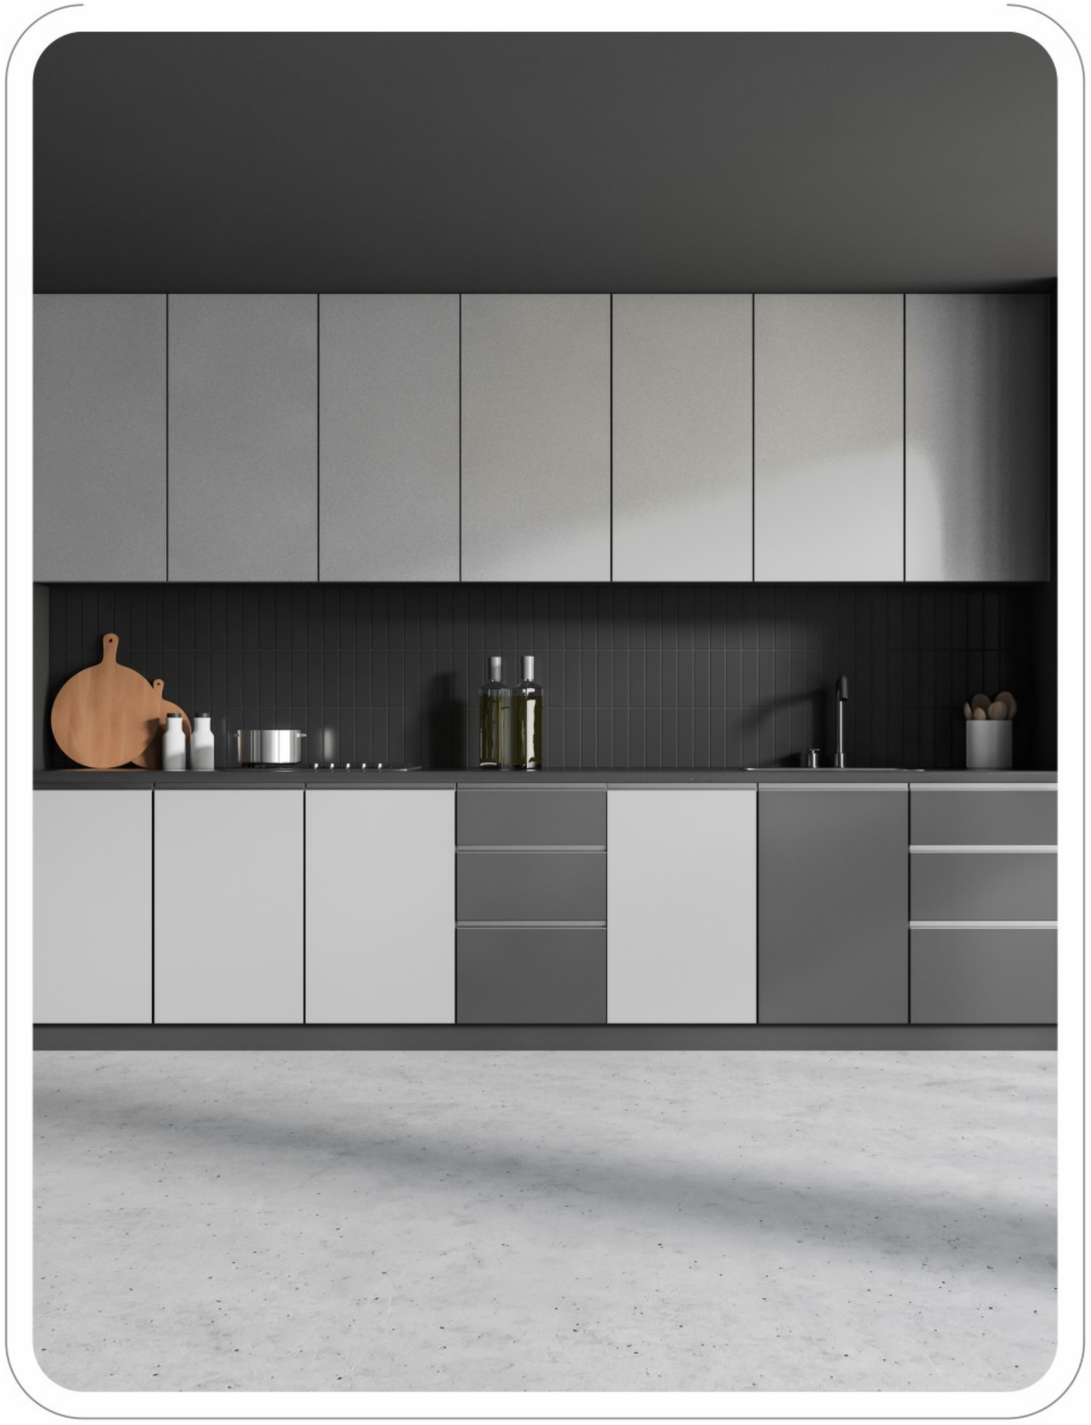

Vibrant Hues

100% PURE ACRYLIC

1.5 MM THICKNESS · ANTI SCRATCH · COLOUR CONSISTENCY · ANTI FINGERPRINT

60x90mm

150 — 1034-VH

140 — 1007-VH

110 — 1006-VH

120 — 1019-VH

121 — 1020-VH

124 — 1021-VH

111 — 1013-VH

106 — 1043-VH



145 — 1024-VH

60x90mm

147 — 1040-VH

108 — 1005-VH

107 — 1004-VH

141 — 1008-VH

155 — 1049-VH

123 — 1022-VH

125 — 1023-VH

Vibrant Hues

100% PURE ACRYLIC

154

1045-VH

143

1016-VH

148

1017-VH

142

1030-VH

135

1037-VH

60x90mm

152

1036-VH

128

1025-VH




129

1026-VH

137

1041-VH

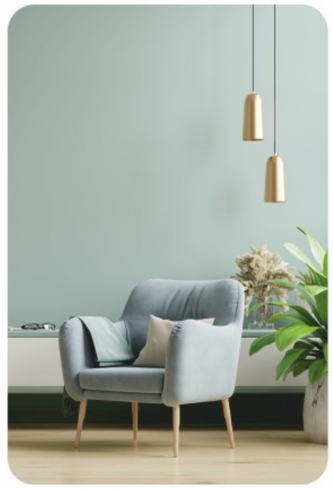

144

1029-VH

146

1018-VH

60x90mm

160

1046-VH

153

1047-VH

162

1048-VH

136

1028-VH

131

1031-VH

Lustron Chroma

60x90mm

2001-LC ★

2003-LC ★

2004-LC ★

60x90mm

2002-LC ★

2006-LC ★

2009-LC ★

2005-LC ★

60x90mm

2007-LC ★

2011-LC ★

Lustra Spark

100% PURE ACRYLIC

1.5 MM THICKNESS

ANTI SCRATCH

COLOUR CONSISTENCY

ANTI FINGERPRINT

2110-LS ★

2111-LS ★

60x90mm


2112-LS ★



2013-LS ★

2015-LS ★

Ripple Series

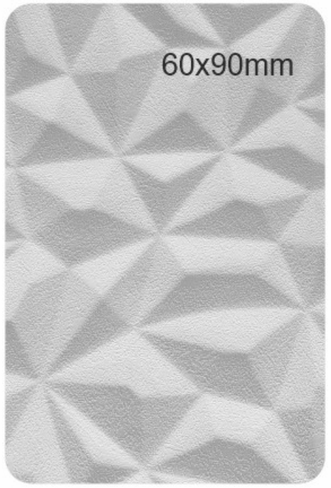

1201-RS



1202-RS



1203-RS

Clear Fluted





4601-CF ★★★★★

THICKNESS 4 MM


Mirror Series



4401-MI ★



4402-MI ★



4403-MI ★



4404-MI ★

TECHNICAL SPECIFICATION

100% PURE ACRYLIC

1.5 MM THICKNESS | ANTI SCRATCH | COLOUR CONSISTENCY | ANTI FINGERPRINT

INSTALLATION TIPS ACRYLIC

- Before buying please check sticker on the product and ensure that you bought original product.
- Check the laminate on the time of delivery whether it has not damaged during transportation and handling and then use for installation.
- Before installation make sure the substrate (MDF, Plywood, Particle Board] is in good quality, with even surface and calibrated thickness.
- Clean the Substrate surface by cloth, sponge, soft brush or sand paper to make free from dust or grease.
- Always use water based PVACP (Polyethylene Vinyl Acetate Co-Polymer] adhesive like for laminates.
- Stir the adhesive gently before using it and do not mix water in the same.
- Spread the adhesive uniformly on both laminate and base substrate by brush, roller or adhesive spreader.
- Keep at least 2MM grove between 02 pieces of laminates, so at the time of pressing it will be easy to remove air between the Laminate and beast substrate. Use soft pinch roller or normal pressing technique and the pressing should be done from the middle of the panel and move towards the sided line and corners.
- Please make sure to give sufficient amount of pressing to laminate for almost 12hrs to 15hrs to achieve full bonding strength.
- Remove the protective film within 7-15days after completion of installation.

DO'S AND DONTS

- Store the laminates below 30C temperature. To avoid the inside cracks & stretch line, do not share acrylic sheet in roll form.
- Clean the surface of laminate with water and clean, non-abrasive cloth. We recommend cleaning with COLIN glass cleaner and soft MICRO fiber cloth.
- Glossy surfaces recommended using in vertical applications.
- Do not use cleaners based on alcohol, solvent, petrol, pinewood or oil as these may damage the surface of the laminate. Do not use other than micro fiber.
- Do not use thinner on the surface of laminates.
- Does not place hot cookware directly on the laminate as the exposure to temperatures above 30C may cause damage to the laminate surface.
- Outdoor application of the laminate with exposure to direct sunlight and weather conditions are strict not recommended. UV rays may de-shape the laminate

Parameters	Acrylic Laminate	High Gloss Laminate	PU Coating	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Anti Scratch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOC)	No	Yes	Yes	Yes

