
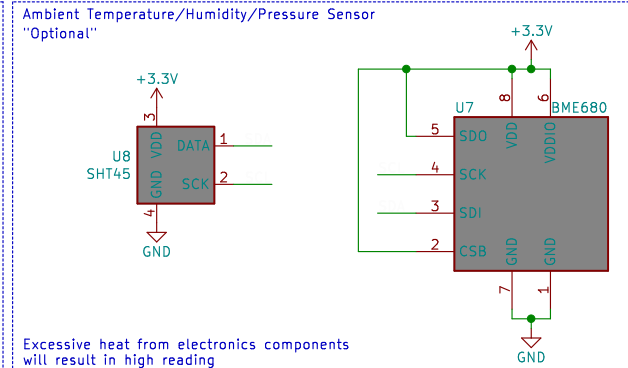
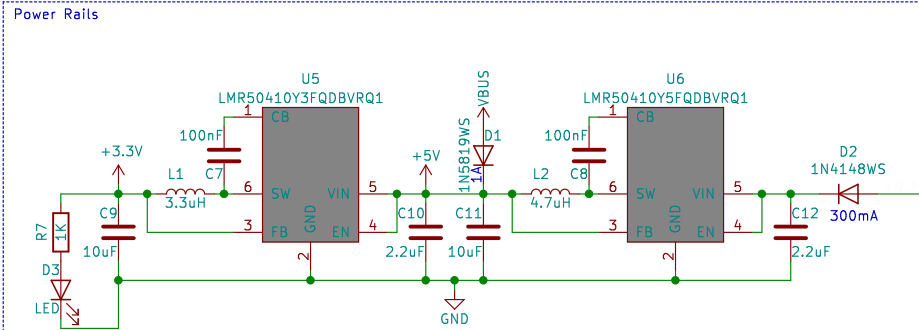
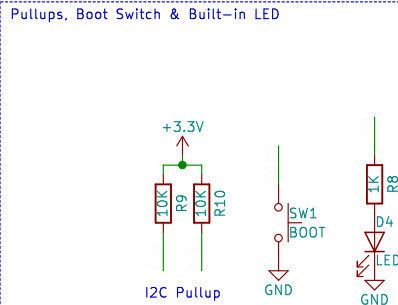


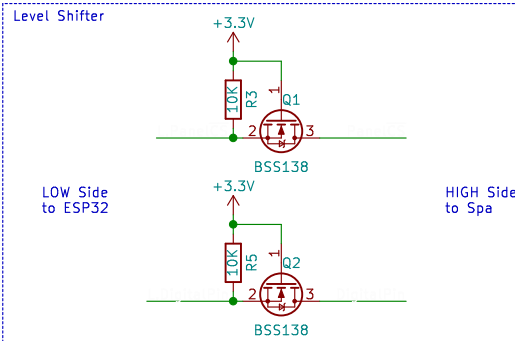
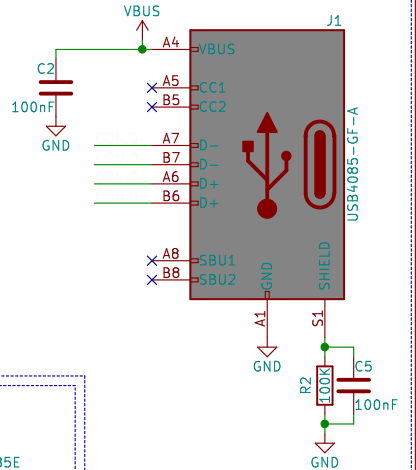



GPIO 0 (must be LOW to enter boot mode)
 GPIO 2 (must be floating or LOW during boot)
 GPIO 4
 GPIO 5 (must be HIGH during boot)
 GPIO 12 (must be LOW during boot)
 GPIO 15 (must be HIGH during boot)

ESP32 Active mode current consumption is: (95–240) mA

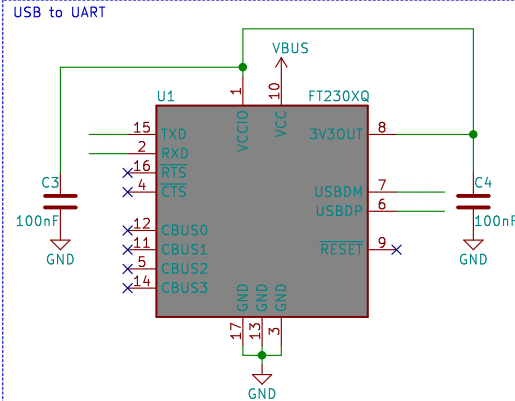

Sheet: /
 File: GL2000-ESP32.sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad (5.1.5)-2

Rev:

Id: 1/1