
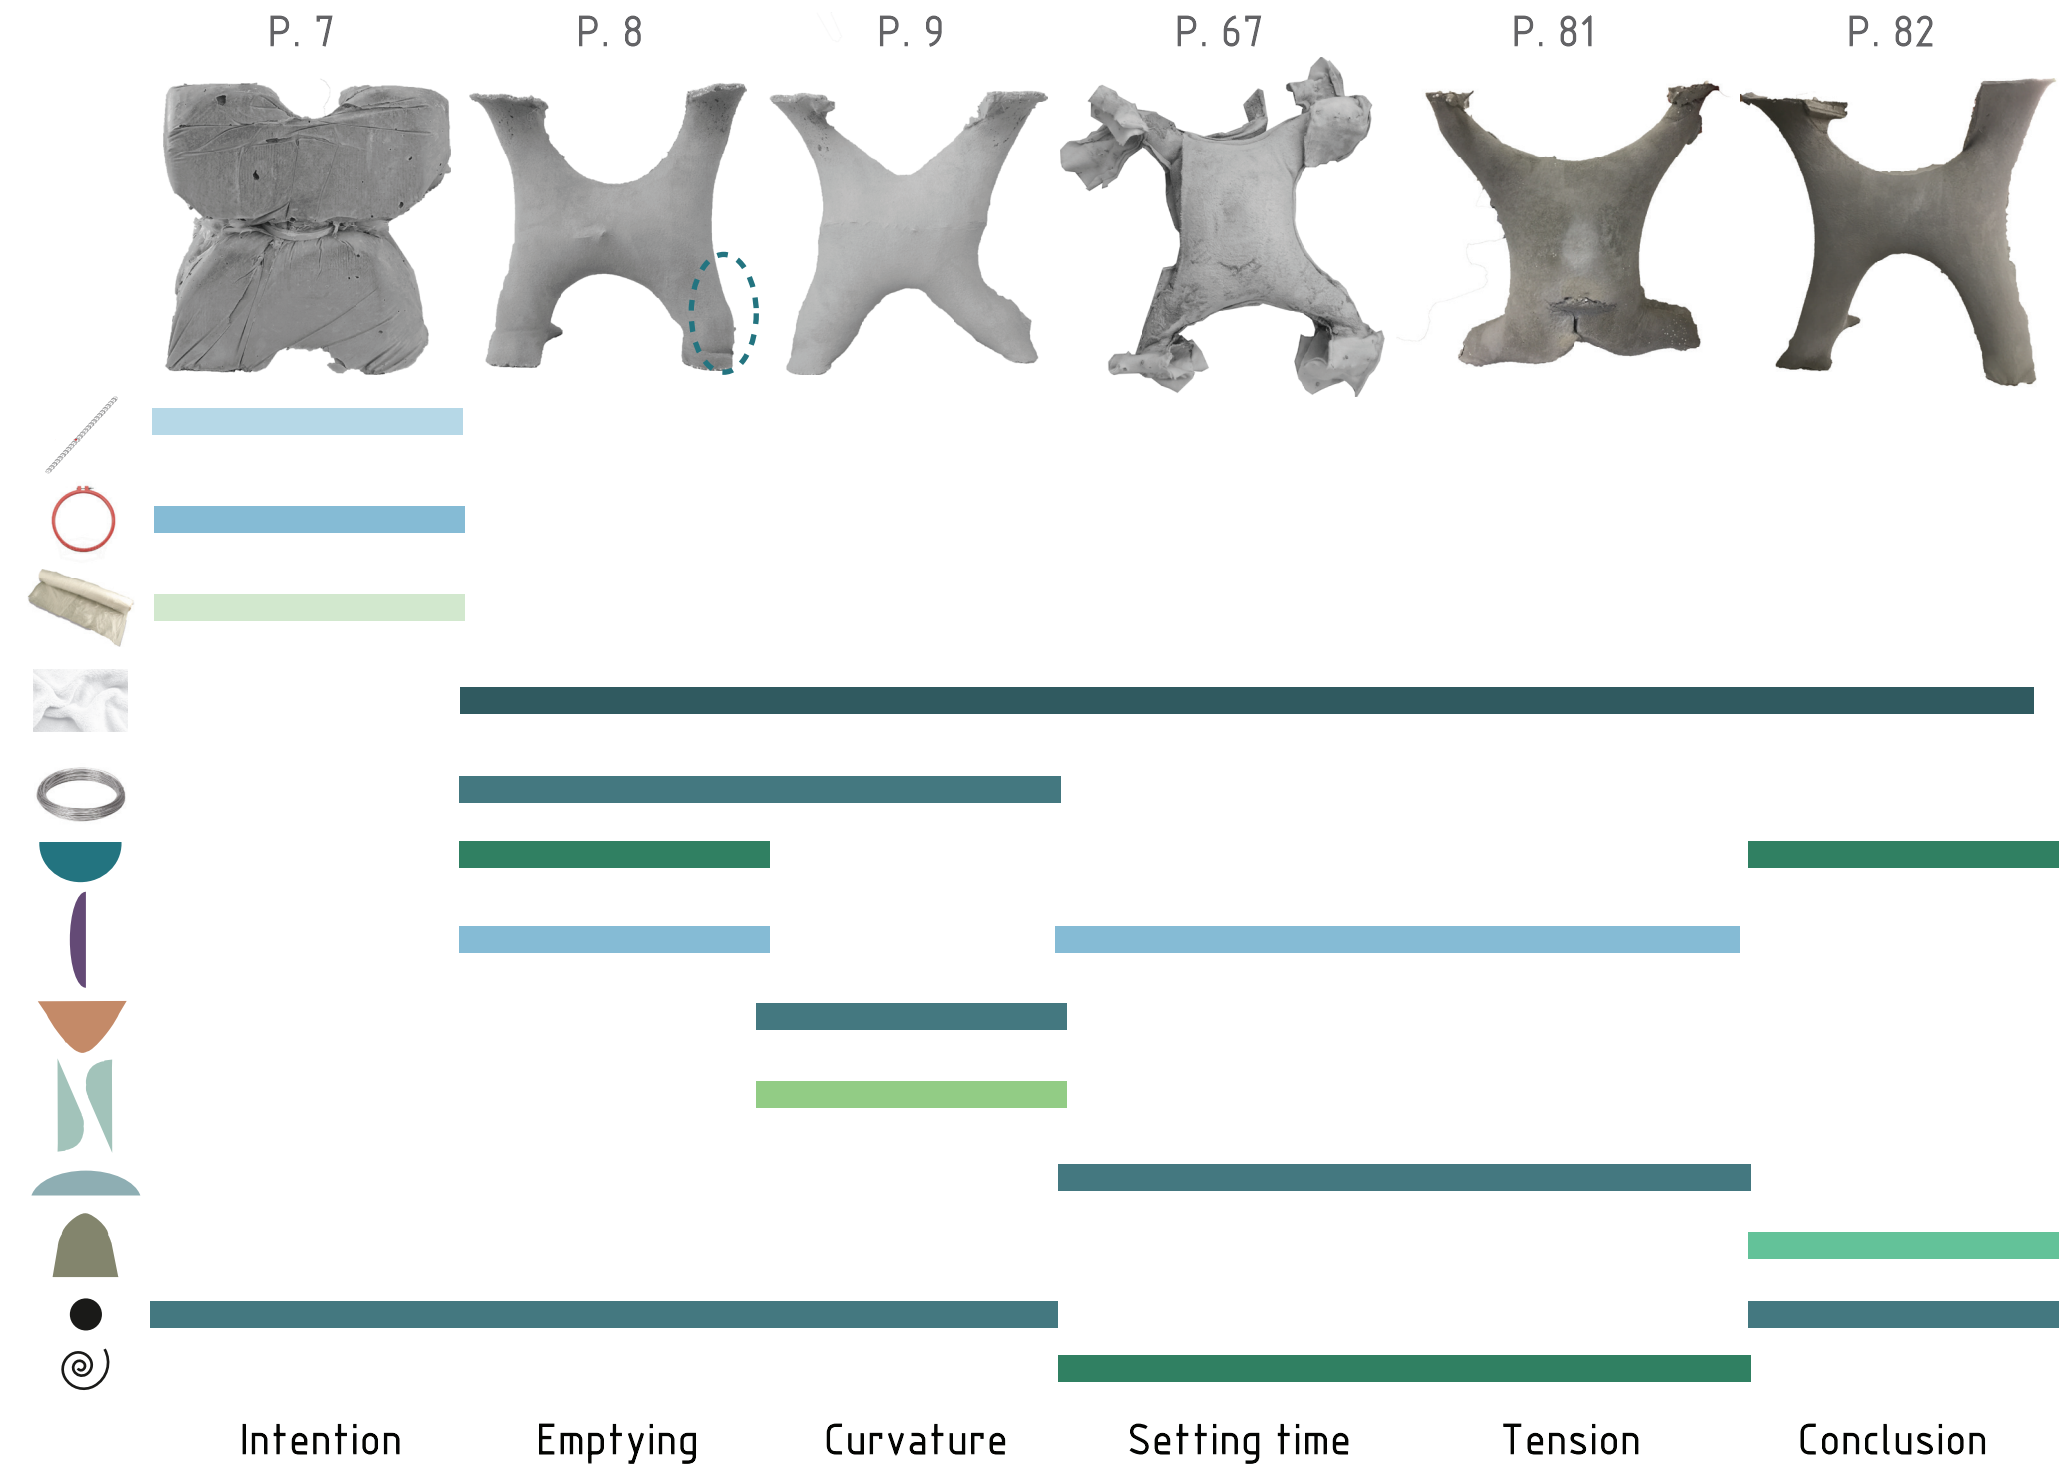










Prevalence of design strategies used and stages of process



Evaluation of assigned variables according to the stages of the process

	P. 7	P. 8	P. 9	P. 67	P. 81	P. 82
Intention	X	X	X	X	X	X
Emptying						
DEFORMATION						
Curvature						
EFFICIENCY (weight)	43 kg	12 kg	12 kg	12 kg	12 kg	12 kg
Setting time						
OPTIMIZATION (weight, resistance, parameters)						
Tension/Compression/Gravity						
Conclusion		 43 cm 38 cm				 38 cm