



HV = 1230 V
GAIN = 4.5E6

120 cm



90% Attenuation
Optical Filters to
reduce PM exposure

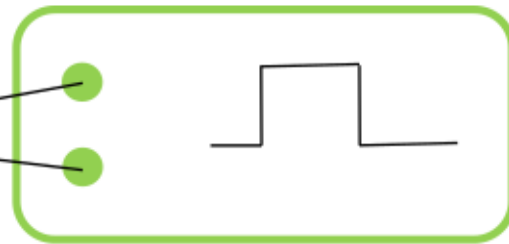

Variable Length Square Pulses with fast rise/fall
times
Pulse height adjusted to decrease LED
fluctuation