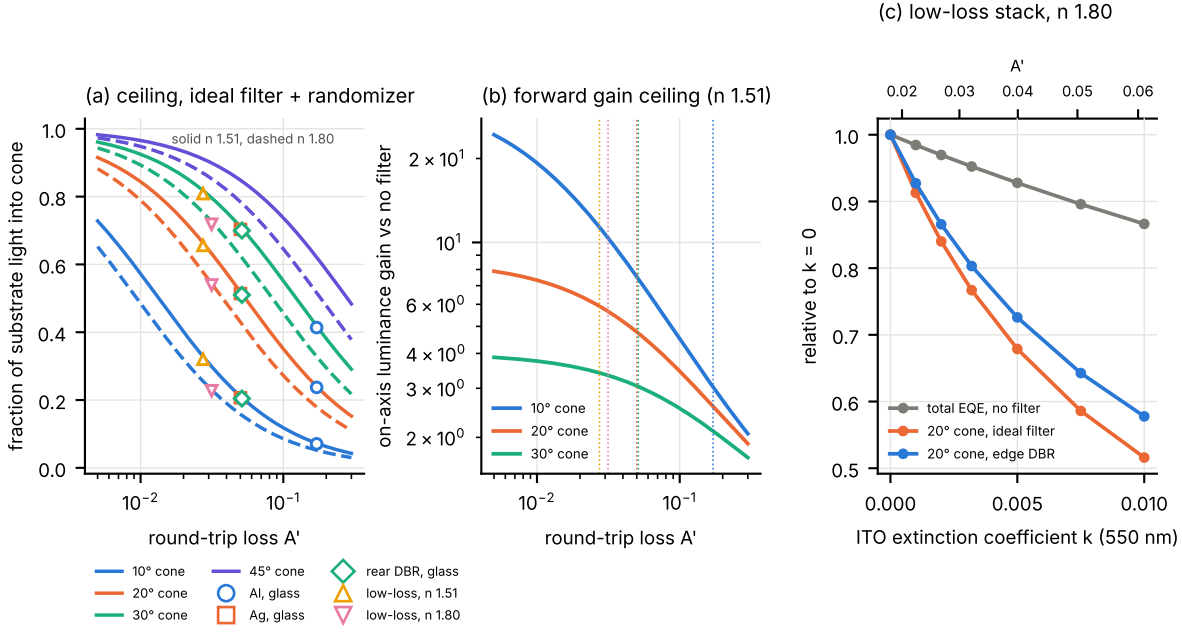
(a) ceiling, ideal filter + randomizer
solid n 1.51, dashed n 1.80
fraction of substrate light into cone
round-trip loss A'
(b) forward gain ceiling (n 1.51)
on-axis luminance gain vs no filter
10° cone
20° cone
30° cone
round-trip loss A'
(c) low-loss stack, n 1.80
A'
relative to k = 0
total EQE, no filter
20° cone, ideal filter
20° cone, edge DBR
ITO extinction coefficient k (550 nm)
10° cone
20° cone
30° cone
45° cone
Al, glass
Ag, glass
rear DBR, glass
low-loss, n 1.51
low-loss, n 1.80