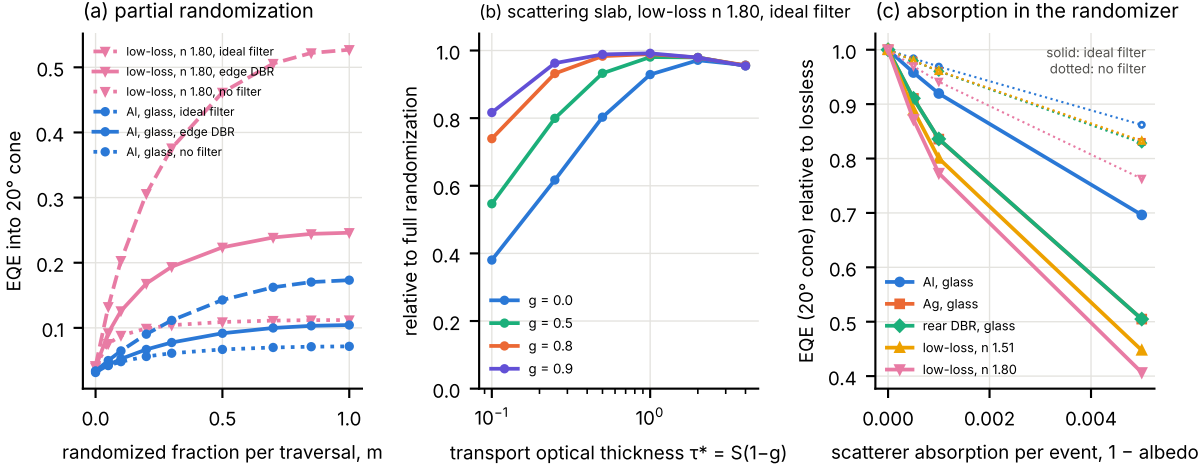
(a) partial randomization
low-loss, n 1.80, ideal filter
low-loss, n 1.80, edge DBR
low-loss, n 1.80, no filter
Al, glass, ideal filter
Al, glass, edge DBR
Al, glass, no filter
EQE into 20° cone
randomized fraction per traversal, m
(b) scattering slab, low-loss n 1.80, ideal filter
g = 0.0
g = 0.5
g = 0.8
g = 0.9
relative to full randomization
transport optical thickness τ* = S(1−g)
(c) absorption in the randomizer
solid: ideal filter
dotted: no filter
Al, glass
Ag, glass
rear DBR, glass
low-loss, n 1.51
low-loss, n 1.80
EQE (20° cone) relative to lossless
scatterer absorption per event, 1 − albedo