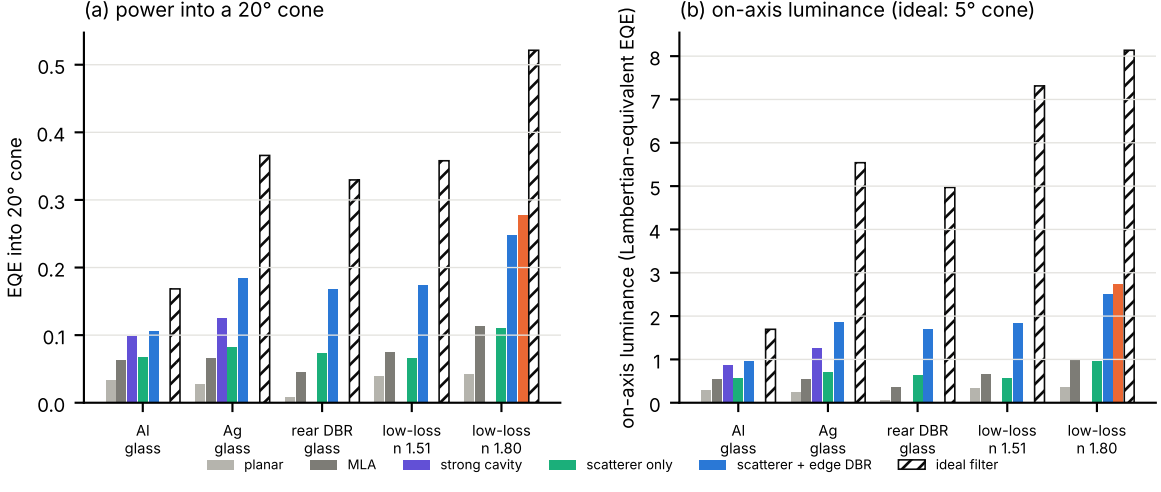
(a) power into a 20° cone
EQE into 20° cone
0.0
0.1
0.2
0.3
0.4
0.5
Al glass
Ag glass
rear DBR glass
low-loss n 1.51
low-loss n 1.80
(b) on-axis luminance (ideal: 5° cone)
on-axis luminance (Lambertian-equivalent EQE)
0
1
2
3
4
5
6
7
8
Al glass
Ag glass
rear DBR glass
low-loss n 1.51
low-loss n 1.80
planar
MLA
strong cavity
scatterer only
scatterer + edge DBR
ideal filter