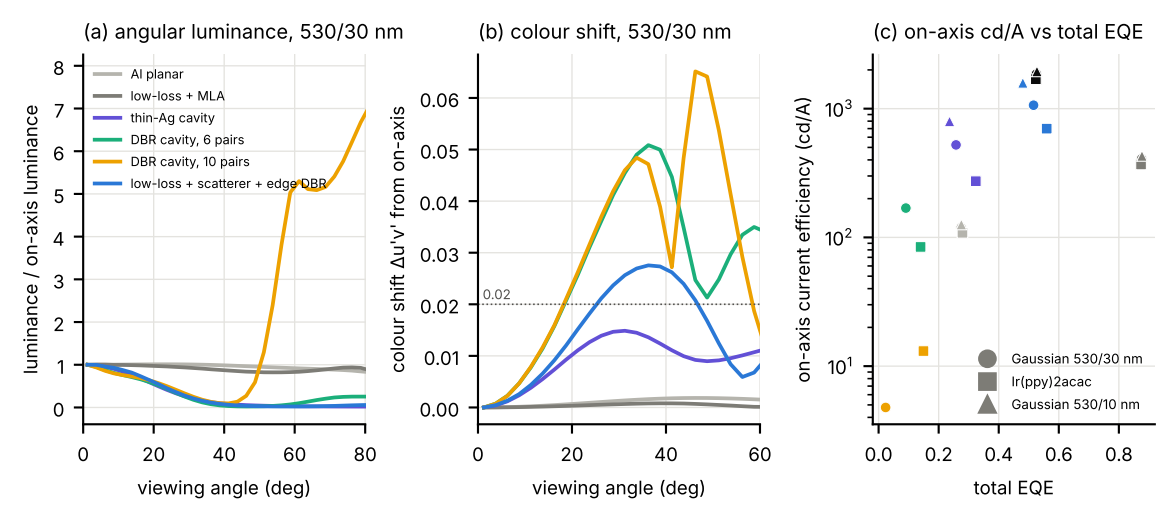
(a) angular luminance, 530/30 nm
luminance / on-axis luminance
viewing angle (deg)
Al planar
low-loss + MLA
thin-Ag cavity
DBR cavity, 6 pairs
DBR cavity, 10 pairs
low-loss + scatterer + edge DBR
(b) colour shift, 530/30 nm
colour shift Δu'v' from on-axis
0.02
viewing angle (deg)
(c) on-axis cd/A vs total EQE
on-axis current efficiency (cd/A)
total EQE
Gaussian 530/30 nm
Ir(ppy)2acac
Gaussian 530/10 nm