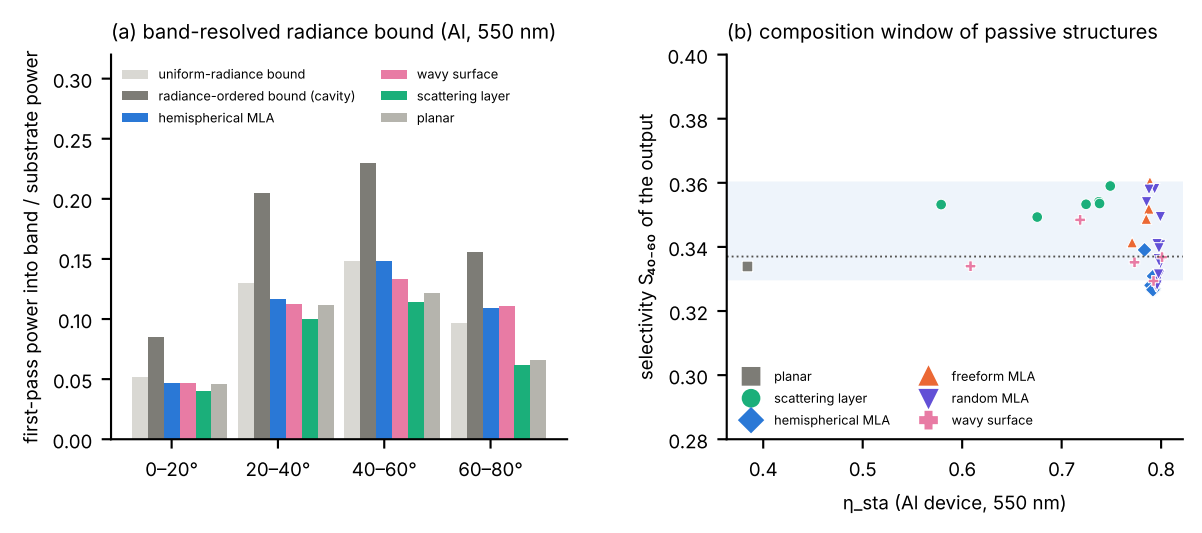
(a) band-resolved radiance bound (Al, 550 nm)
uniform-radiance bound
radiance-ordered bound (cavity)
hemispherical MLA
wavy surface
scattering layer
planar
first-pass power into band / substrate power
0.00
0.05
0.10
0.15
0.20
0.25
0.30
0–20°
20–40°
40–60°
60–80°
(b) composition window of passive structures
selectivity S40–60 of the output
0.28
0.30
0.32
0.34
0.36
0.38
0.40
planar
scattering layer
hemispherical MLA
freeform MLA
random MLA
wavy surface
0.4
0.5
0.6
0.7
0.8
η_sta (Al device, 550 nm)