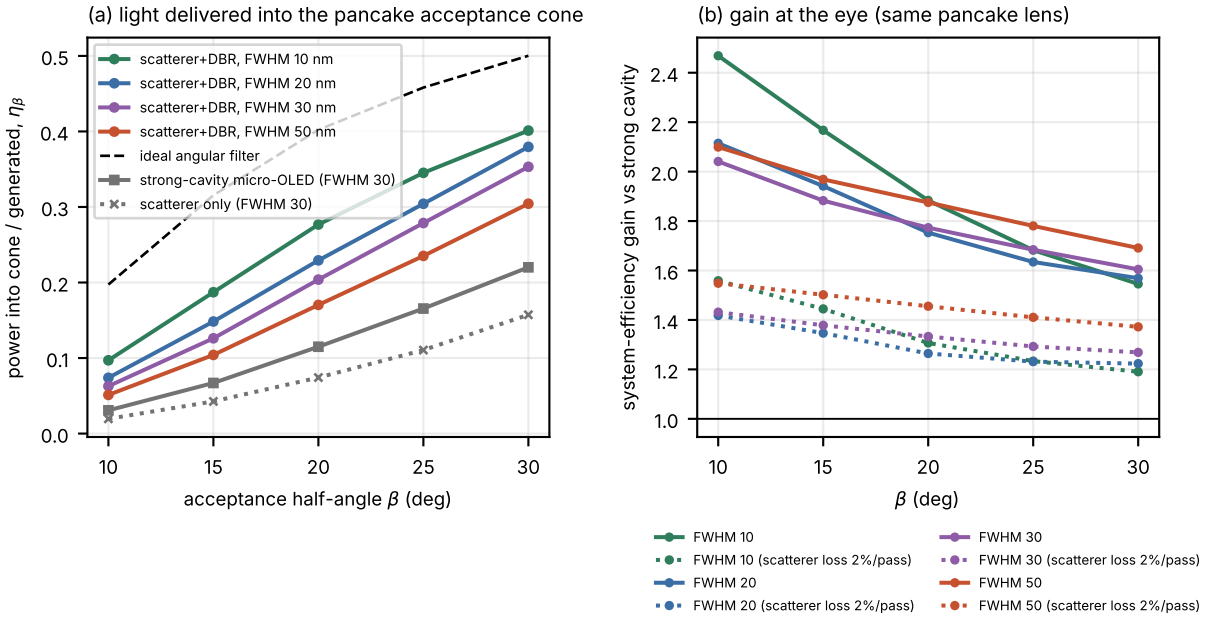
(a) light delivered into the pancake acceptance cone
scatterer+DBR, FWHM 10 nm
scatterer+DBR, FWHM 20 nm
scatterer+DBR, FWHM 30 nm
scatterer+DBR, FWHM 50 nm
ideal angular filter
strong-cavity micro-OLED (FWHM 30)
scatterer only (FWHM 30)
power into cone / generated, η_β
acceptance half-angle β (deg)
0.0
0.1
0.2
0.3
0.4
0.5
10
15
20
25
30
(b) gain at the eye (same pancake lens)
system-efficiency gain vs strong cavity
β (deg)
1.0
1.2
1.4
1.6
1.8
2.0
2.2
2.4
FWHM 10
FWHM 10 (scatterer loss 2%/pass)
FWHM 20
FWHM 20 (scatterer loss 2%/pass)
FWHM 30
FWHM 30 (scatterer loss 2%/pass)
FWHM 50
FWHM 50 (scatterer loss 2%/pass)