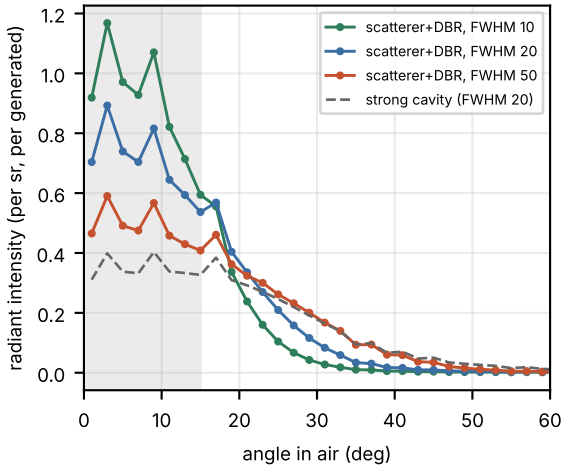
(a) designs optimized for beta = 15 deg
scatterer+DBR, FWHM 10
scatterer+DBR, FWHM 20
scatterer+DBR, FWHM 50
strong cavity (FWHM 20)
radiant intensity (per sr, per generated)
angle in air (deg)
0.0
0.2
0.4
0.6
0.8
1.0
1.2
0
10
20
30
40
50
60

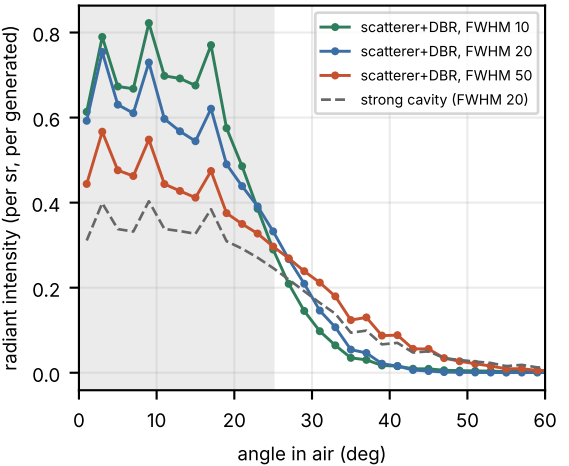
(b) designs optimized for beta = 25 deg
scatterer+DBR, FWHM 10
scatterer+DBR, FWHM 20
scatterer+DBR, FWHM 50
strong cavity (FWHM 20)
radiant intensity (per sr, per generated)
angle in air (deg)
0.0
0.2
0.4
0.6
0.8
0
10
20
30
40
50
60