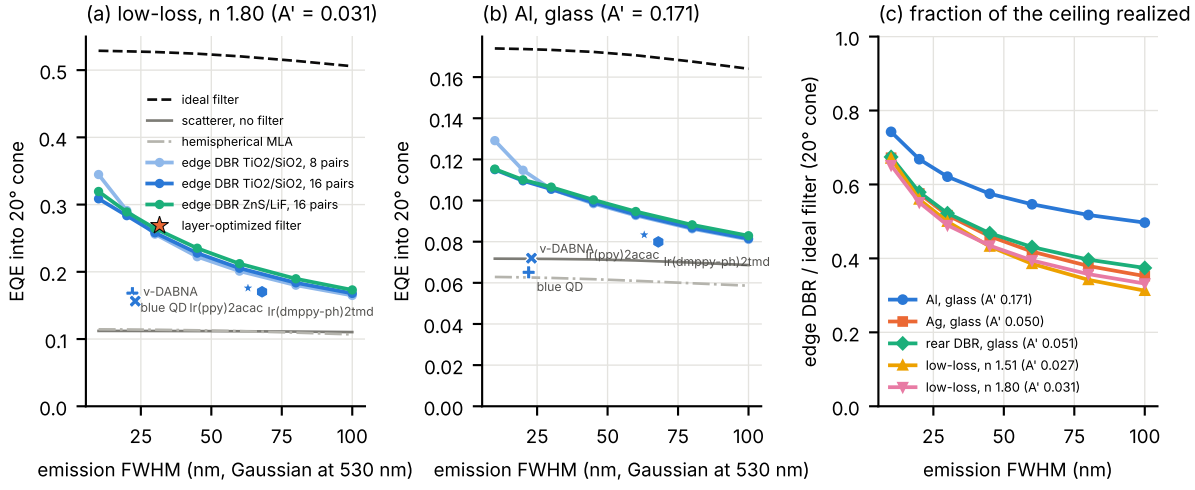
(a) low-loss, n 1.80 (A' = 0.031)
EQE into 20° cone
emission FWHM (nm, Gaussian at 530 nm)
ideal filter
scatterer, no filter
hemispherical MLA
edge DBR TiO2/SiO2, 8 pairs
edge DBR TiO2/SiO2, 16 pairs
edge DBR ZnS/LiF, 16 pairs
layer-optimized filter
v-DABNA
blue QD
Ir(ppy)2acac
Ir(dmppy-ph)2tmd
(b) Al, glass (A' = 0.171)
EQE into 20° cone
emission FWHM (nm, Gaussian at 530 nm)
v-DABNA
Ir(ppy)2acac
Ir(dmppy-ph)2tmd
blue QD
(c) fraction of the ceiling realized
edge DBR / ideal filter (20° cone)
emission FWHM (nm)
Al, glass (A' 0.171)
Ag, glass (A' 0.050)
rear DBR, glass (A' 0.051)
low-loss, n 1.51 (A' 0.027)
low-loss, n 1.80 (A' 0.031)