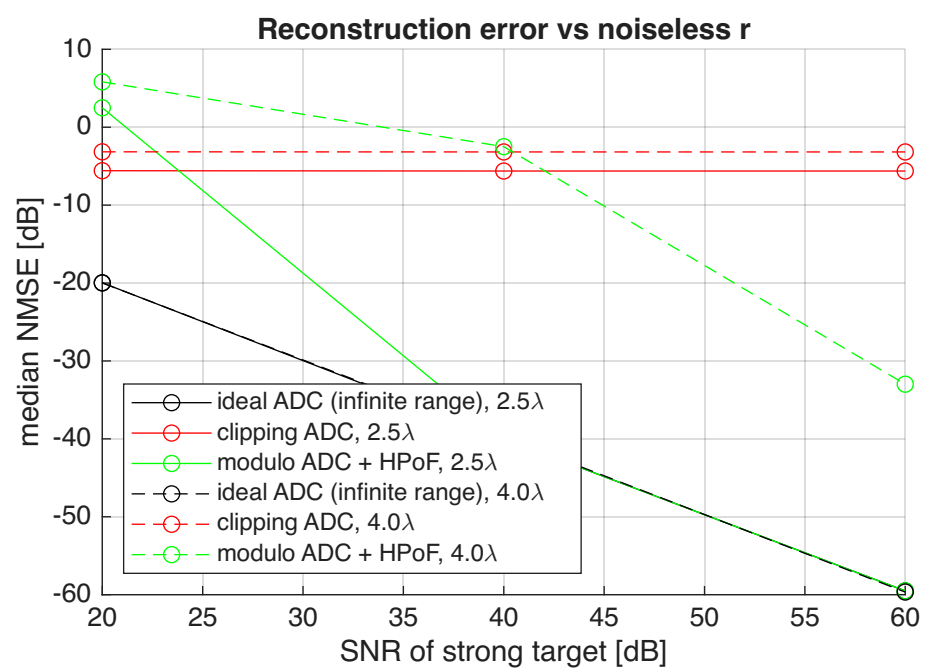
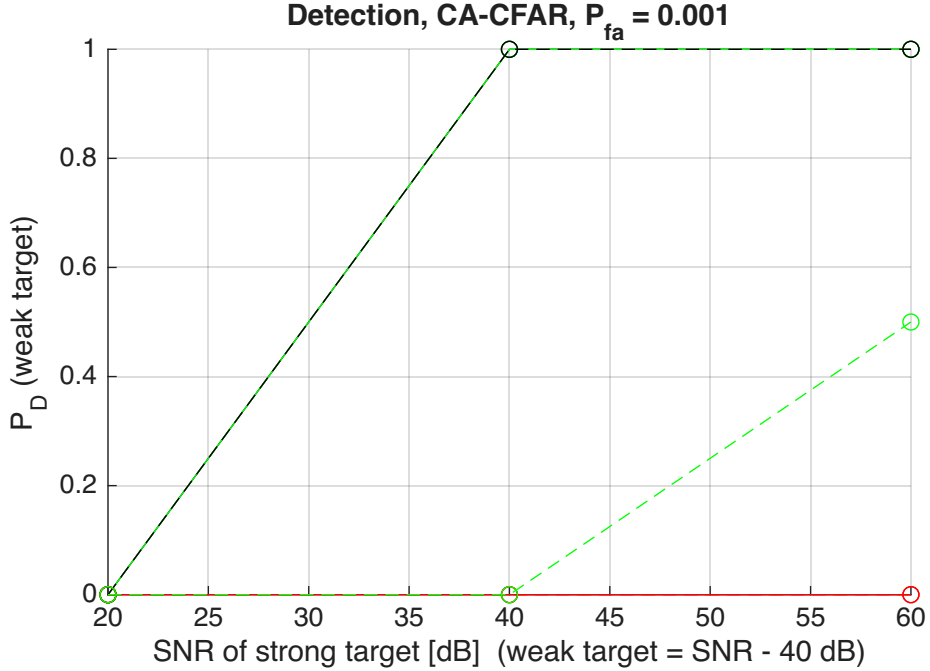

Reconstruction error vs noiseless r
median NMSE [dB]
SNR of strong target [dB]
ideal ADC (infinite range), 2.5λ
clipping ADC, 2.5λ
modulo ADC + HPoF, 2.5λ
ideal ADC (infinite range), 4.0λ
clipping ADC, 4.0λ
modulo ADC + HPoF, 4.0λ


Detection, CA-CFAR, P_fa = 0.001
P_D (weak target)
SNR of strong target [dB] (weak target = SNR - 40 dB)


Ghost targets
measured false-alarm rate per bin
design P_fa
SNR of strong target [dB]


HPoF: all folds recovered exactly
fraction of trials
strong echo 2.5λ
strong echo 4.0λ
SNR of strong target [dB]