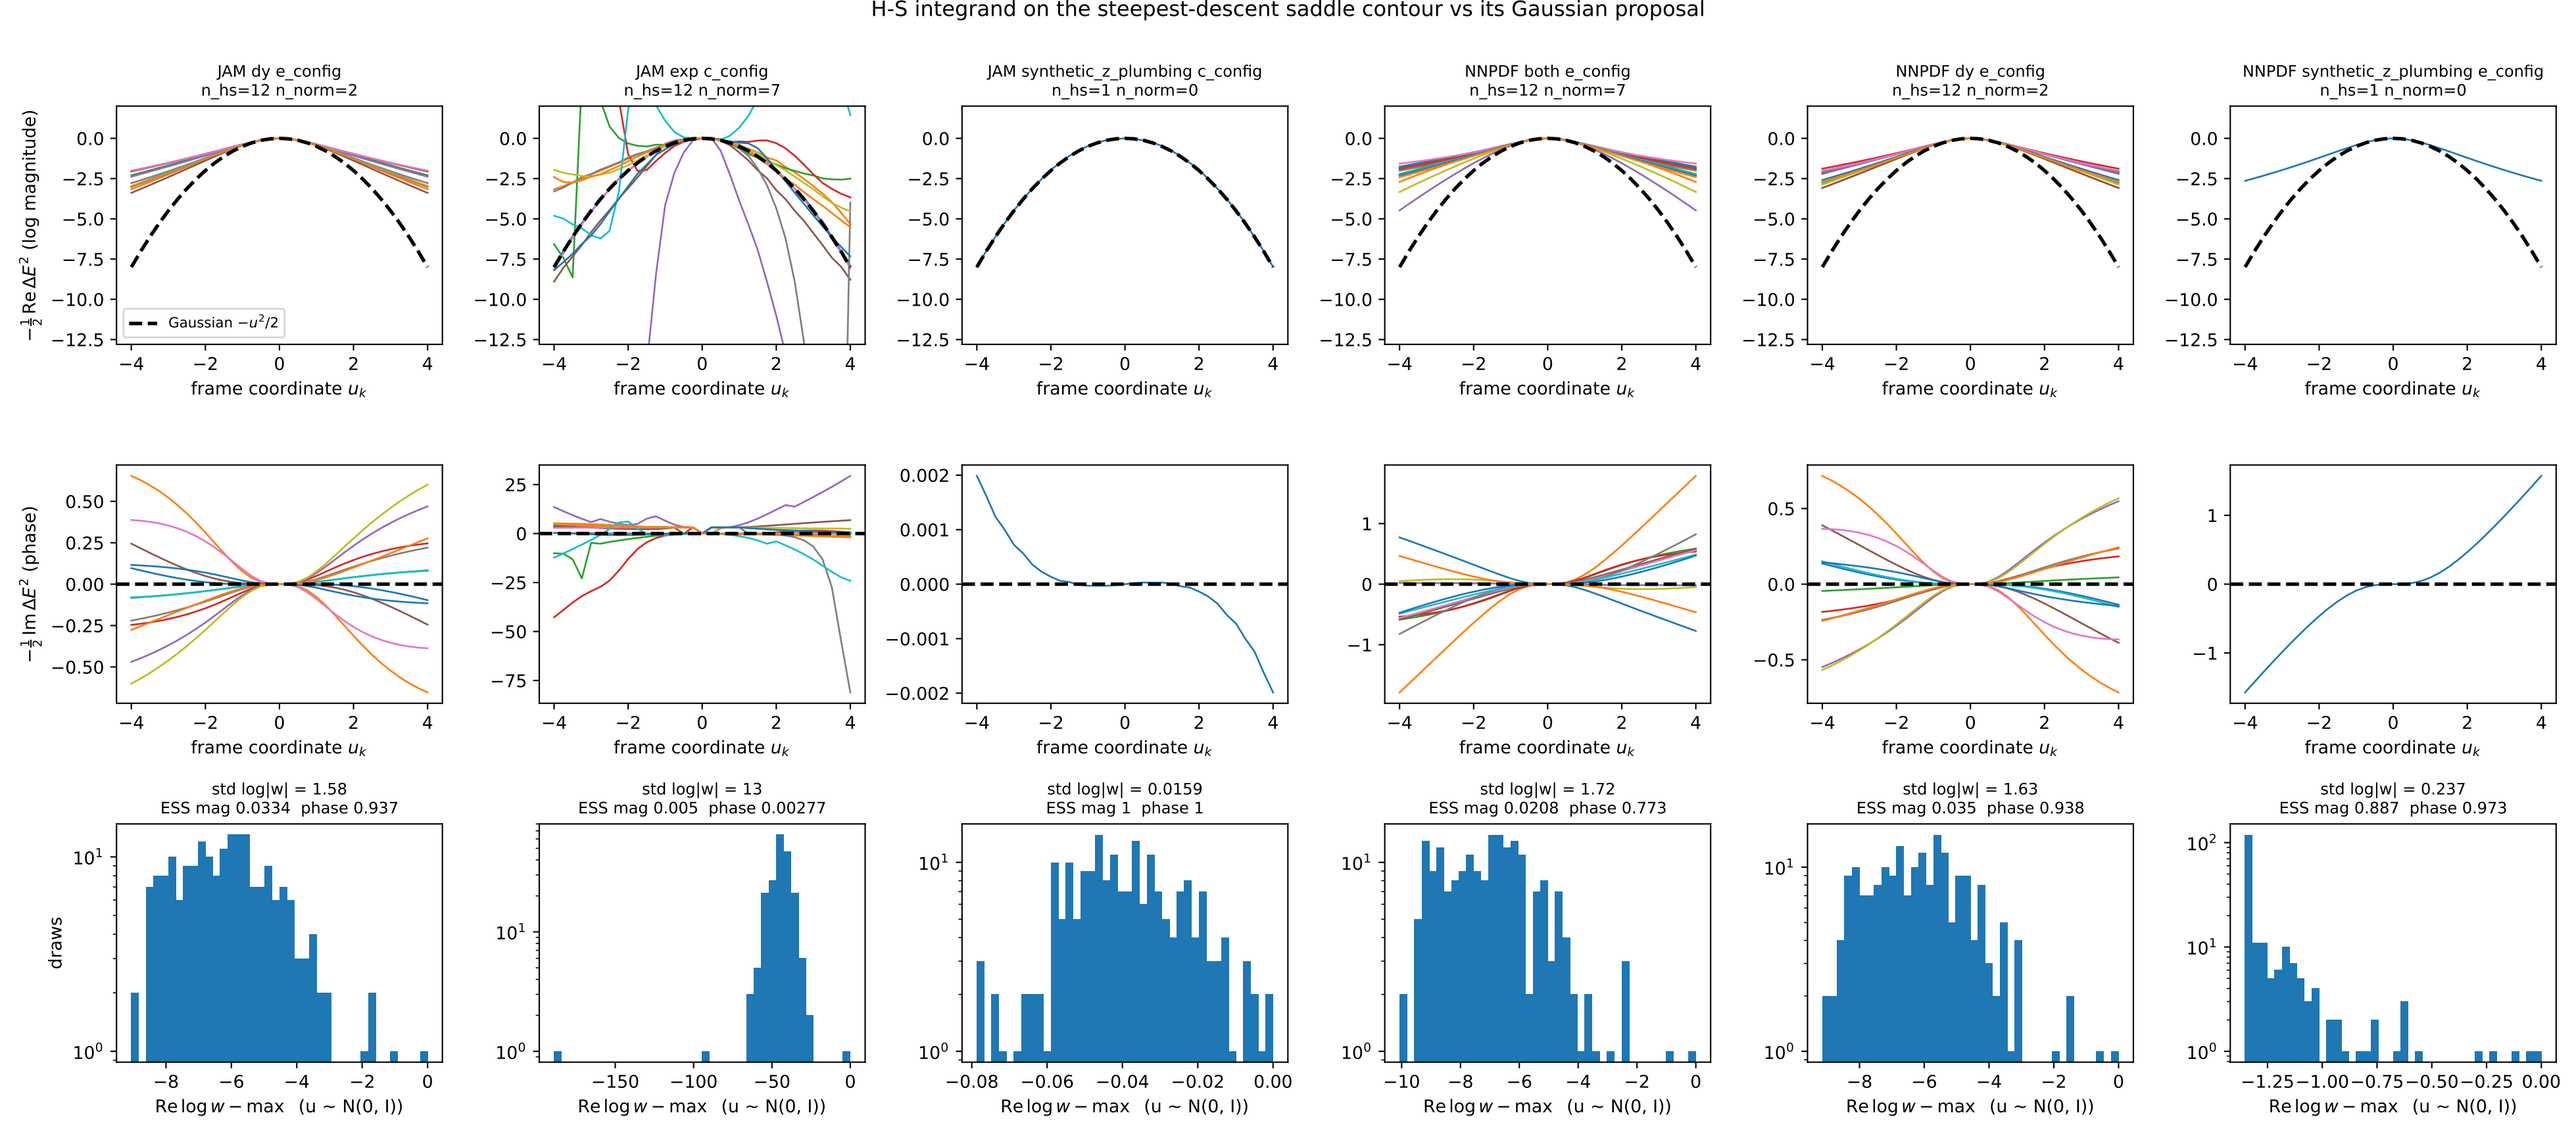

H-S integrand on the steepest-descent saddle contour vs its Gaussian proposal
JAM dy e_config
n_hs=12 n_norm=2
JAM exp c_config
n_hs=12 n_norm=7
JAM synthetic_z_plumbing c_config
n_hs=1 n_norm=0
NNPDF both e_config
n_hs=12 n_norm=7
NNPDF dy e_config
n_hs=12 n_norm=2
NNPDF synthetic_z_plumbing e_config
n_hs=1 n_norm=0
$-\frac{1}{2}\,\mathrm{Re}\,\Delta E^2$ (log magnitude)
Gaussian $-u^2/2$
$-\frac{1}{2}\,\mathrm{Im}\,\Delta E^2$ (phase)
frame coordinate u_k
std log|w| = 1.58
ESS mag 0.0334 phase 0.937
std log|w| = 13
ESS mag 0.005 phase 0.00277
std log|w| = 0.0159
ESS mag 1 phase 1
std log|w| = 1.72
ESS mag 0.0208 phase 0.773
std log|w| = 1.63
ESS mag 0.035 phase 0.938
std log|w| = 0.237
ESS mag 0.887 phase 0.973
draws
$\mathrm{Re}\log w - \max$ (u ~ N(0, I))