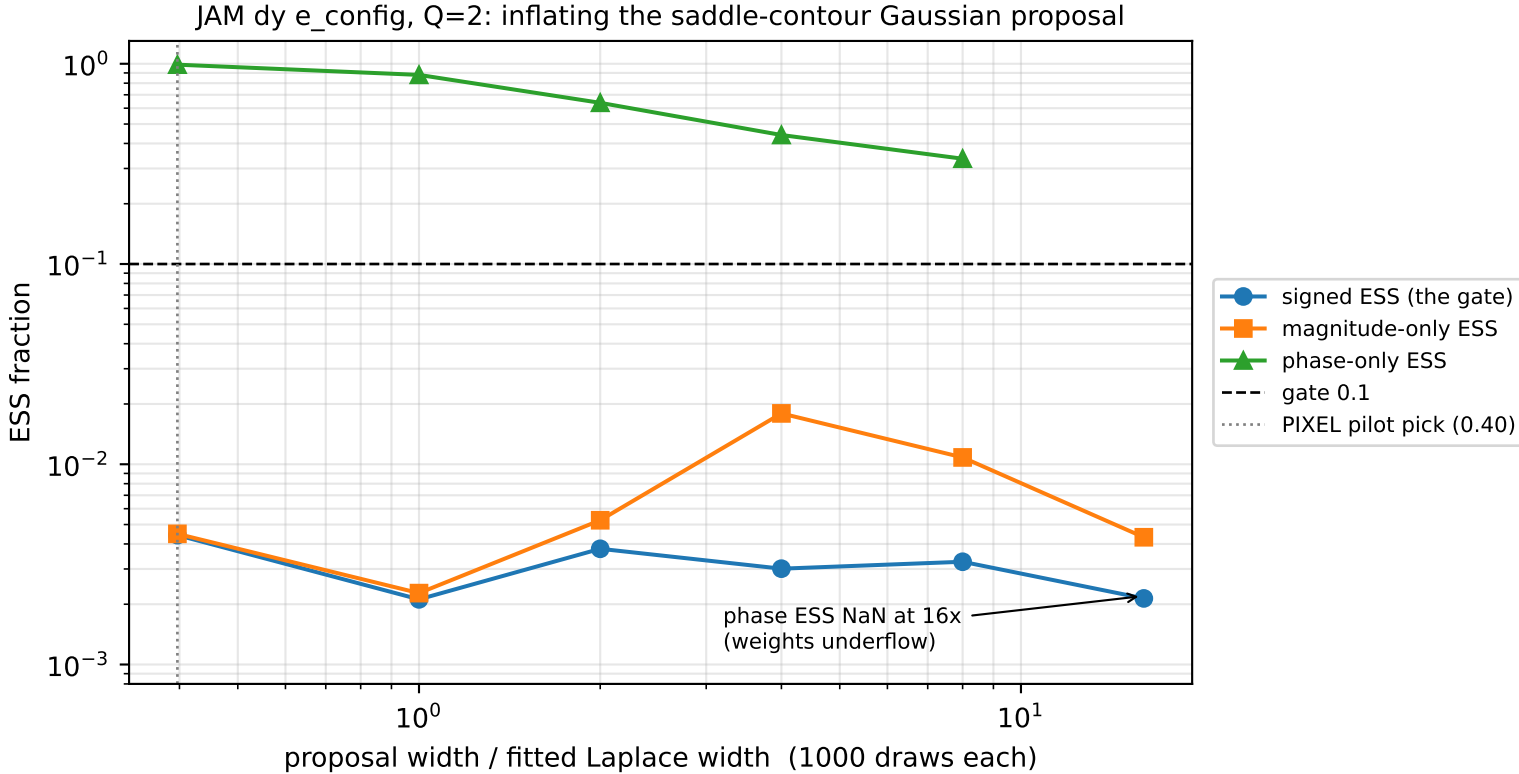
JAM dy e_config, Q=2: inflating the saddle-contour Gaussian proposal
ESS fraction
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{0}
10^{1}
proposal width / fitted Laplace width (1000 draws each)
signed ESS (the gate)
magnitude-only ESS
phase-only ESS
gate 0.1
PIXEL pilot pick (0.40)
phase ESS NaN at 16x
(weights underflow)