

FZ Series

CHIP TYPE, LONG LIFE WITH EXTRA LOWER IMPEDANCE

貼片式，長壽命極低阻抗品


- Extra lower impedance with temperature range -55~+105°C  
極低阻抗和適用於 -55~+105°C 的溫度範圍
- Load life of 2000~5000 hours  
負荷壽命 2000~5000 小時
- Impedance 5~25% less than KZ series  
阻抗值比 KZ 系列低 5~25%
- RoHS & REACH compliant, Halogen-free  
符合 RoHS 與 REACH，無鹵



SPECIFICATIONS 特性表

Items 項目	Characteristics 主要特性										
Operation Temperature Range 使用溫度範圍	-55 ~ +105°C										
Voltage Range 額定工作電壓範圍	6.3 ~ 100V										
Capacitance Range 靜電容量範圍	3.3 ~ 8200μF										
Capacitance Tolerance 靜電容量允許偏差	±20% at 120Hz, 20°C										
Leakage Current 漏電流	Leakage current ≤0.01CV or 3μA (Ø4~Ø10), whichever is greater (after 2 minutes application of rated voltage at 20°C) Leakage current ≤0.03CV or 4μA (Ø12.5~Ø18), whichever is greater (after 1 minute application of rated voltage at 20°C) 漏電流 ≤0.01CV 或 3μA (Ø4~Ø10)，取較大值（在 20°C 環境中施加額定工作電壓 2 分鐘後） 漏電流 ≤0.03CV 或 4μA (Ø12.5~Ø18)，取較大值（在 20°C 環境中施加額定工作電壓 1 分鐘後）										
	C: Nominal capacitance (μF) 標稱靜電容量, V: Rated voltage (V) 額定電壓										
Dissipation Factor (tan δ) 損耗角正切	Measurement frequency 測試頻率: 120Hz, Temperature 溫度: 20°C										
	Rated Voltage (V) 額定工作電壓		6.3	10	16	25	35	50	63~80	100	
	tan δ (max.)		Ø4~Ø10	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.07
	最大損耗角正切		Ø12.5~Ø18	0.26	0.19	0.18	0.16	0.14	0.10	0.08	0.07
Stability at Low Temperature 低溫特性	Measurement frequency 測試頻率: 120Hz										
	Rated Voltage (V) 額定工作電壓				6.3 ~ 16			25 ~ 100			
	Impedance Ratio 阻抗比		Z(-25°C) / Z(20°C)			2			2		
			Z(-40°C) / Z(20°C)			3			3		
	ZT/Z20 (max.)		Z(-55°C) / Z(20°C)			4			3		
Load Life 高溫負荷特性	After 5000 hrs. (2000 hrs. for Ø4~Ø6.3×5.8) application of the rated voltage at 105°C, they meet the characteristics listed below. 在 105°C 環境中施加額定工作電壓 5000 小時（Ø4~Ø6.3×5.8 為 2000 小時）後，電容器的特性符合下表的要求。										
	Capacitance Change 靜電容量變化率				Within ±30% of initial value 初始值的±30%以內						
	Dissipation Factor 損耗角正切				200% or less of initial specified value 不大於規範值的 200%						
	Leakage Current 漏電流				initial specified value or less 不大於規範值						
Shelf Life 高溫貯存特性	After leaving capacitors under no load at 105°C for 1000 hours, they meet the specified value for load life characteristics listed above. 在 105°C 環境中無負荷放置 1000 小時後，電容器的特性符合高溫負荷特性中所列的規定值。										
Resistance to Soldering Heat 耐焊接熱特性  (Please refer page 23 for soldering conditions) (焊接條件請查閱第 23 頁)	After reflow soldering and restored at room temperature, they meet the characteristics listed below. 經過回流焊並冷卻至室溫後，電容器的特性符合下表的要求。										
	Capacitance Change 靜電容量變化率				Within ±10% of initial value 初始值的±10%以內						
	Dissipation Factor 損耗角正切				initial specified value or less 不大於規範值						
	Leakage Current 漏電流				initial specified value or less 不大於規範值						
Marking 標識	Black print on the case top. 鋁殼頂部黑字印刷。										

DRAWING 外形圖 (Unit: mm)

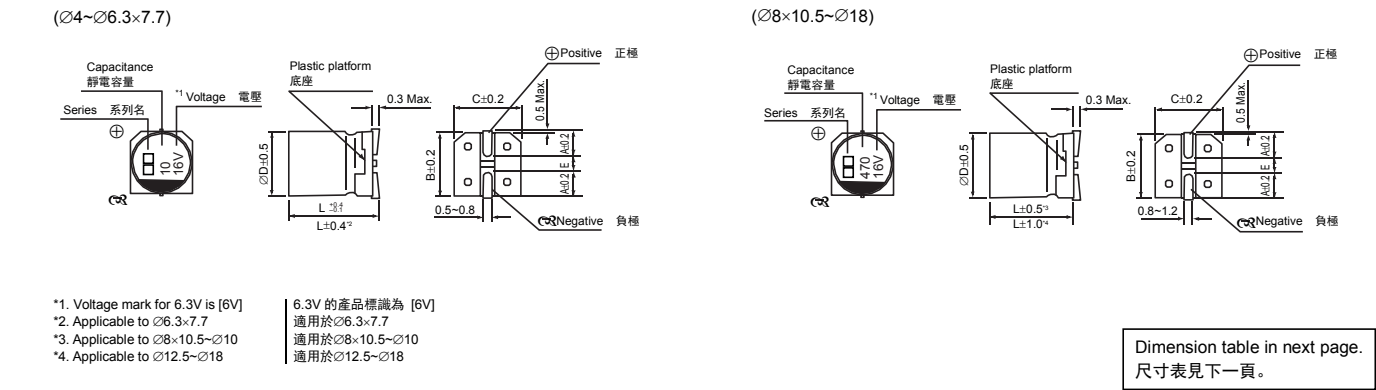

**Note:** All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.  
**注:** 以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

## FZ Series

## ○ DIMENSIONS (Unit: mm) 尺寸表

∅D x L	4 x 5.8	5 x 5.8	6.3 x 5.8	6.3 x 7.7	8 x 10.5	10 x 10.5	10 x 13.5	12.5 x 13.5	12.5 x 16	16 x 16.5	18 x 16.5	18 x 18.5
A	2.0	2.2	2.6	2.6	3.0	3.3	3.3	4.9	4.9	5.8	6.2	6.2
B	4.3	5.3	6.6	6.6	8.4	10.4	10.4	13.0	13.0	17.0	19.0	19.0
C	4.3	5.3	6.6	6.6	8.4	10.4	10.4	13.0	13.0	17.0	19.0	19.0
E ± 0.2	1.0	1.4	1.9	1.9	3.1	4.7	4.7	4.7	4.7	6.4	6.4	6.4
L	5.8	5.8	5.8	7.7	10.5	10.5	13.5	13.5	16.0	16.5	16.5	18.5

## ○ DIMENSIONS &amp; MAXIMUM PERMISSIBLE RIPPLE CURRENT &amp; IMPEDANCE 規格尺寸及最大允許紋波電流及阻抗值

WV Code μF 代碼	6.3			10			16		
	0J			1A			1C		
10 100							4 x 5.8	1.35	90
15 150							4 x 5.8	1.35	90
22 220	4 x 5.8	1.35	90	4 x 5.8	1.35	90	5 x 5.8	0.76	160
33 330	5 x 5.8 (4 x 5.8)	0.76 (1.35)	160 (90)	5 x 5.8	0.76	160	6.3 x 5.8	0.44	240
47 470	5 x 5.8 (4 x 5.8)	0.76 (1.35)	160 (90)	6.3 x 5.8	0.44	240	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	240 (160)
56 560	5 x 5.8	0.76	160	6.3 x 5.8	0.44	240	6.3 x 5.8	0.44	240
68 680	6.3 x 5.8	0.44	240	6.3 x 5.8	0.44	240	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	300 (240)
100 101	6.3 x 5.8	0.44	240	6.3 x 7.7	0.34	300	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	300 (240)
150 151	6.3 x 5.8	0.44	240	6.3 x 7.7	0.34	300	6.3 x 7.7	0.34	300
220 221	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	300 (240)	6.3 x 7.7	0.34	300	8 x 10.5 (6.3 x 7.7)	0.17 (0.34)	600 (300)
330 331	8 x 10.5	0.17	600	10 x 10.5 (8 x 10.5)	0.09 (0.17)	850 (600)	10 x 10.5 (8 x 10.5)	0.08 (0.17)	850 (600)
470 471	8 x 10.5	0.17	600	10 x 10.5 (8 x 10.5)	0.09 (0.17)	850 (600)	10 x 10.5 (8 x 10.5)	0.09 (0.17)	850 (600)
680 681	10 x 10.5 (8 x 10.5)	0.09 (0.17)	850 (600)	10 x 10.5	0.09	850	10 x 13.5 (10 x 10.5)	0.07 (0.09)	950 (850)
1000 102	10 x 10.5 (8 x 10.5)	0.09 (0.17)	850 (600)	10 x 13.5 (10 x 10.5)	0.07 (0.09)	950 (850)	12.5 x 16 (12.5 x 13.5)	0.055 (0.06)	1200 (1100)
1500 152	10 x 13.5	0.09	950	12.5 x 13.5	0.06	1100	16 x 16.5	0.05	1450
2200 222	12.5 x 13.5	0.06	1100	12.5 x 16	0.055	1200	16 x 16.5	0.05	1450
3300 332	12.5 x 16	0.055	1200	16 x 16.5	0.05	1260	16 x 16.5	0.05	1450
4700 472	16 x 16.5	0.05	1450	16 x 16.5	0.05	1450	18 x 16.5	0.048	1500
6800 682	18 x 16.5	0.048	1500	18 x 16.5	0.048	1500	Case size 尺寸	Impedance 阻抗值	Ripple current 紋波電流
8200 822	18 x 16.5	0.048	1500						

WV Code μF 代碼	25			35			50		
	1E			1V			1H		
4.7 4R7				4 x 5.8	1.35	90	5 x 5.8	1.52	85
10 100	4 x 5.8	1.35	90	5 x 5.8	0.76	160	6.3 x 5.8 (5 x 5.8)	0.88 (1.35)	165 (115)
15 150	5 x 5.8	0.76	160	5 x 5.8	0.76	160	6.3 x 5.8	0.88	165
22 220	6.3 x 5.8 (5 x 5.8)	0.44 (0.76)	240 (160)	6.3 x 5.8	0.44	240	6.3 x 7.7 (6.3 x 5.8)	0.68 (0.88)	195 (165)
33 330	6.3 x 5.8	0.44	240	6.3 x 5.8	0.44	240	6.3 x 7.7	0.68	195
47 470	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.44)	300 (240)	6.3 x 7.7 (6.3 x 5.8)	0.34 (0.88)	300 (165)	8 x 10.5 (6.3 x 7.7)	0.34 (0.68)	350 (195)
56 560	6.3 x 7.7	0.34	300	6.3 x 7.7	0.34	300	8 x 10.5	0.34	350
68 680	6.3 x 7.7	0.34	300	8 x 10.5	0.17	600	8 x 10.5	0.34	350
100 101	8 x 10.5 (6.3 x 7.7)	0.17 (0.34)	600 (300)	8 x 10.5	0.17	600	10 x 10.5 (8 x 10.5)	0.18 (0.34)	670 (350)
150 151	8 x 10.5 (6.3 x 7.7)	0.16 (0.34)	600 (300)	10 x 10.5	0.09	850	10 x 13.5 (10 x 10.5)	0.14 (0.18)	780 (670)
220 221	8 x 10.5	0.17	600	10 x 10.5 (8 x 10.5)	0.09 (0.16)	850 (600)	10 x 13.5 (10 x 10.5)	0.14 (0.26)	780 (750)
330 331	10 x 10.5 (8 x 10.5)	0.09 (0.17)	850 (600)	10 x 13.5 (10 x 10.5)	0.07 (0.10)	950 (850)	12.5 x 13.5	0.12	900
470 471	10 x 13.5 (10 x 10.5)	0.07 (0.09)	950 (850)	12.5 x 13.5 (10 x 13.5) (10 x 10.5)	0.06 (0.07) (0.10)	1100 (1000) (950)	16 x 16.5 (12.5 x 16) (12.5 x 13.5)	0.08 (0.10) (0.08)	1250 (1050) (1100)
680 681	12.5 x 13.5	0.06	1100	12.5 x 16 (12.5 x 13.5)	0.055 (0.06)	1200 (1100)	16 x 16.5	0.073	1250
1000 102	16 x 16.5 (12.5 x 16) (12.5 x 13.5)	0.05 (0.055) (0.06)	1450 (1200) (1100)	16 x 16.5	0.05	1450	18 x 16.5	0.073	1250
1500 152	16 x 16.5	0.05	1450	18 x 16.5	0.048	1500	18 x 16.5	0.066	1500
2200 222	16 x 16.5	0.05	1450	18 x 18.5	0.038	1750	Case size 尺寸	Impedance 阻抗值	Ripple current 紋波電流
3300 333	18 x 16.5 (18 x 18.5)	0.048 (0.048)	1500 (1500)						

※Case size 尺寸 ∅DxL(mm), Impedance 阻抗值 (Ω) at 20°C, 100KHz, Ripple current 紋波電流 (mA rms) at 105°C, 100KHz

**Note:** All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

FZ Series

○ DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT & IMPEDANCE 規格尺寸及最大允許紋波電流及阻抗值

WV Code μF 代碼	63			80			100		
	1J			1K			2A		
3.3	3R3			5 × 5.8	5.0	25			
4.7	4R7	5 × 5.8	3.0	50	6.3 × 5.8	3.0	40		
10	100	6.3 × 7.7 (6.3 × 5.8)	1.2 (1.5)	120 (80)	6.3 × 7.7	2.4	60	8 × 10.5	1.3 130
22	220	8 × 10.5 (6.3 × 7.7)	0.65 (1.2)	250 (120)	8 × 10.5	1.3	130	10 × 10.5 (8 × 10.5)	0.7 (1.3) 200 (160)
33	330	8 × 10.5	0.65	250	10 × 10.5	0.7	200	10 × 13.5	0.7 200
47	470	10 × 10.5 (8 × 10.5)	0.5 (0.65)	300 (250)	10 × 13.5	0.45	300	12.5 × 13.5	0.32 500
68	680	12.5 × 13.5 (10 × 10.5)	0.16 (0.5)	800 (300)	12.5 × 13.5	0.32	500	12.5 × 13.5	0.32 500
100	101	12.5 × 13.5 (10 × 13.5) (10 × 10.5)	0.16 (0.25) (0.5)	800 (400) (300)	12.5 × 13.5 (10 × 13.5)	0.32 (0.18)	500 (750)	16 × 16.5 (12.5 × 16) (12.5 × 13.5)	0.17 (0.26) (0.32) 795 (550) (500)
150	151	12.5 × 13.5 (10 × 13.5)	0.16 (0.25)	800 (650)	12.5 × 13.5	0.32	500	12.5 × 16	0.26 550
220	221	12.5 × 13.5	0.16	800	12.5 × 16 (12.5 × 13.5)	0.26 (0.12)	550 (900)	18 × 16.5	0.15 850
330	331	16 × 16.5	0.082	900	16 × 16.5	0.17	795	18 × 16.5	0.15 850
470	471	16 × 16.5	0.082	900	18 × 16.5	0.15	850	18 × 18.5	0.15 950
680	681	18 × 16.5	0.08	1150	18 × 18.5	0.15	950	Case size 尺寸	Impedance 阻抗值
1000	102	18 × 18.5	0.06	1250					

※Case size 尺寸 ∅D×L(mm), Impedance 阻抗值 (Ω) at 20°C, 100KHz, Ripple current 紋波電流 (mA rms) at 105°C, 100KHz

○ FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT 紋波電流頻率補償系數

Frequency 頻率			50Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient 系數	∅4 ~ ∅10	4.7 ~ 68μF	0.35	0.50	0.64	0.83	1.00
		100 ~ 1500μF	0.40	0.55	0.70	0.85	1.00
	∅12.5 ~ ∅18	~ 68μF	0.40	0.55	0.70	0.85	1.00
		100 ~ 680μF	0.45	0.65	0.80	0.90	1.00
		1000 ~ 4700μF	0.65	0.85	0.95	1.00	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5~10°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced. 鋁電解電容器在疊加紋波電流後會引起發熱，溫度每上升 5~10°C 壽命會減半。若要保持長壽命性能，請在使用過程中適當降低紋波電流。

**Note:** All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.  
注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。