



Projekt kampusu Politechniki Lubelskiej

Table of Contents

Cover	1
Table of Contents	2
Luminaire list	3

Product data sheets

Current - ALT3-168L-305-AM-5W-HDL (1x C-70-CRI WITH DIFFUSE LENS DATA	4
SHOWN IS ABSOLUTE Educational, Government, Healthcare, Hospitality, Hotel, Industrial, Institutional, Manufacturing, Pathway, Prison, Roadway, Site, Sports, Street, Direct, Wet Location)	
Leipziger Leuchten GmbH - KSW (1x HALOLINE)	5
VARTON - Architectural light (1x LED)	6
VARTON - Street lighting (1x LED)	7

Site 1

Luminaire layout plan	9
-----------------------------	---

Luminaire list

 Φ_{total}

886727 lm

 P_{total}

15622.0 W

Luminous efficacy

56.8 lm/W

pcs.	Manufacturer	Article No.	Article name	P	Φ	Luminous efficacy
26	Current	-	ALT3-168L-305-AM-5W-HDL	307.0 W	5465 lm	17.8 lm/W
1	Leipziger Leuchten GmbH	9.301.6810 .00	KSW	500.0 W	8588 lm	17.2 lm/W
22	VARTON	V1- G1-71443- 04L19-661 20XX Frieze 20° RGBW 120W DMX	Architectural light	120.0 W	5999 lm	50.0 lm/W
9	VARTON	V1-S1- H0704-40 U24-65500 40 Uragan Parking 500W 4000K NEMA	Street lighting	500.0 W	67119 lm	134.2 lm/W


Product data sheet

Current - ALT3-168L-305-AM-5W-HDL



Article No.	-
P	307.0 W
Φ _{Lamp}	-
Φ _{Luminaire}	5465 lm
η	-
Luminous efficacy	17.8 lm/W
CCT	3000 K
CRI	70

The ALTITUDE® is the ultimate in luminaire design innovation. The low-profile housing is proportional and scalable with sizes to cover pedestrian/site/roadway environmentsThree Sizes for maximum flexibility to cover more applications, IP66 Certified, Nine IES distribution patterns, Three Lens options: no lens, clear and diffuse for visual comfort, NX wired and wireless integrated control system, 70, 80 and 90 CRI are available,

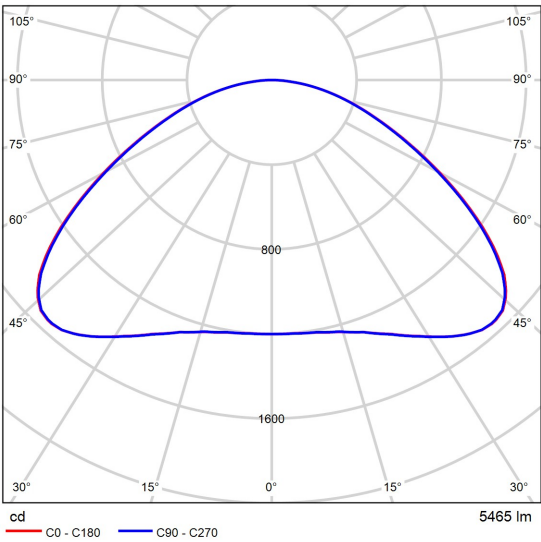

Polar LDC

Glare evaluation according to UGR													
p Ceiling		70	70	50	50	30	70	70	50	50	30	30	
p Walls		50	30	50	30	20	50	30	50	30	20	20	
p Floor		20	20	20	20	20	20	20	20	20	20	20	
Room size X Y		Viewing direction at right angles to lamp axis						Viewing direction parallel to lamp axis					
2H	2H	22.2	23.6	22.5	23.9	24.1	22.1	23.6	22.4	23.8	24.1		
	3H	23.4	24.7	23.7	25.0	25.3	23.3	24.6	23.7	24.9	25.2		
	4H	23.9	25.1	24.2	25.4	25.7	23.8	25.0	24.2	25.3	25.6		
	6H	24.3	25.4	24.6	25.7	26.0	24.2	25.3	24.5	25.6	26.0		
	8H	24.4	25.5	24.7	25.8	26.1	24.3	25.4	24.7	25.7	26.1		
	12H	24.4	25.5	24.8	25.8	26.2	24.4	25.4	24.8	25.8	26.1		
4H	2H	22.8	24.0	23.1	24.3	24.6	22.7	24.0	23.1	24.2	24.5		
	3H	24.2	25.2	24.6	25.5	25.9	24.1	25.2	24.5	25.5	25.8		
	4H	24.8	25.7	25.2	26.1	26.5	24.7	25.7	25.1	26.0	26.4		
	6H	25.3	26.1	25.7	26.5	26.9	25.2	26.0	25.6	26.4	26.8		
	8H	25.4	26.2	25.9	26.6	27.0	25.4	26.2	25.8	26.5	27.0		
	12H	25.5	26.3	26.0	26.7	27.1	25.5	26.2	25.9	26.6	27.1		
8H	4H	25.0	25.8	25.5	26.2	26.6	25.0	25.7	25.4	26.1	26.5		
	6H	25.7	26.3	26.1	26.7	27.2	25.6	26.2	26.1	26.7	27.1		
	8H	25.9	26.5	26.4	26.9	27.4	25.9	26.4	26.3	26.9	27.3		
	12H	26.1	26.6	26.6	27.0	27.5	26.0	26.5	26.5	27.0	27.5		
12H	4H	25.0	25.7	25.5	26.2	26.6	25.0	25.7	25.4	26.1	26.5		
	6H	25.7	26.3	26.2	26.7	27.2	25.7	26.2	26.1	26.7	27.1		
	8H	26.0	26.5	26.5	27.0	27.5	26.0	26.4	26.4	26.9	27.4		
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.1 / -0.1						+0.1 / -0.1					
S = 1.5H		+0.4 / -0.5						+0.4 / -0.5					
S = 2.0H		+0.7 / -0.9						+0.7 / -0.9					
Standard table		BK05						BK05					
Correction summand		8.5						8.4					
Corrected glare indices referring to 5465lm Total luminous flux													


UGR diagram (SHR: 0.25)

Product data sheet

Leipziger Leuchten GmbH - KSW



Article No.	9.301.6810.00
P	500.0 W
Φ_{Lamp}	9500 lm
$\Phi_{\text{Luminaire}}$	8588 lm
η	90.40 %
Luminous efficacy	17.2 lm/W
CCT	2856 K
CRI	100

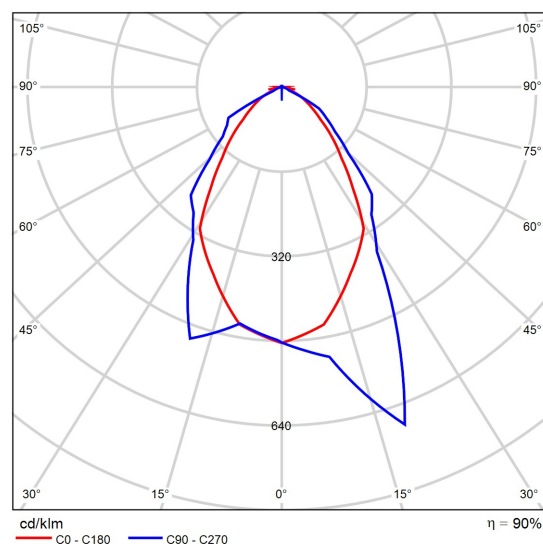


Polar LDC

Small spots with halogen or high-pressure lamps for floodlighting historic/public buildings, open air/building sites, small sports fields, etc.

- High-quality aluminium cast housing
- Socket for halogen lamps with RSC-15
- Reflectors made of highest-grade aluminium sheet, burnished and anodized
- Thermal protective glass
- Silicone rubber seal
- Special steel closing clips
- Galvanized steel mounting bracket
- Housing and bracket painted, see table for colours

Product data sheet

VARTON - Architectural light

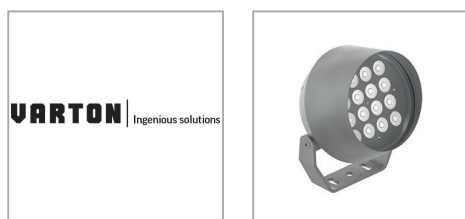

Article No.	V1- G1-71443-04L19-661 20XX Frieze 20°
P	120.0 W
Φ_{Lamp}	6000 lm
$\Phi_{\text{Luminaire}}$	5999 lm
η	99.99 %
Luminous efficacy	50.0 lm/W
CCT	3000 K
CRI	80

Floodlight for architectural illumination. Cast aluminum housing, tempered glass diffuser. Application: architectural light. Installation: surface-mounted.

Climatic modification and category of placement: YX/I1

Color rendering index: 80-89

Ingress protection (IP): IP66


Power factor: 0,97

Impact resistance: IK08

Dimming DMX: Yes

Flicker, %: 1

<https://www.varton.ru/products/arkhitekturnoe-osveshchenie/frieze/frieze-20-rgbw/svetodiodnyy-svetilnik-var-ton-arkhitekturnyy-frieze-l-120-vt-dmx-rgbw-linzovanny-20-gradusov-ral704/>

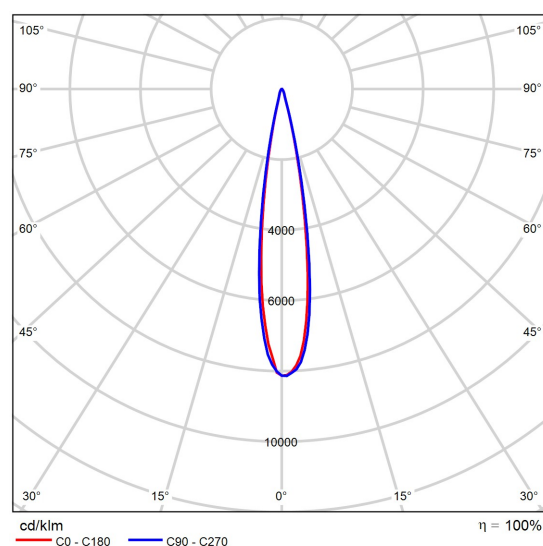


Polar LDC

Product data sheet

VARTON - Street lighting



Article No.	V1-S1- H0704-40U24-65500 40 Uragan Parking 500W 4000K NEMA
P	500.0 W
Φ_{Lamp}	67500 lm
$\Phi_{\text{Luminaire}}$	67119 lm
η	99.44 %
Luminous efficacy	134.2 lm/W
CCT	4000 K
CRI	70

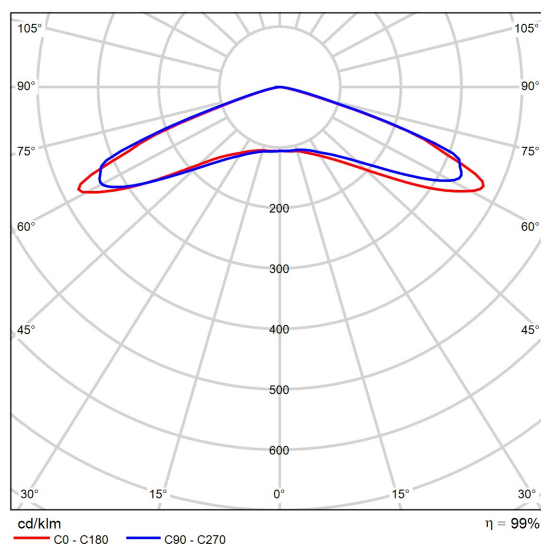

Polar LDC

High-power modular luminaire for outdoor lighting. Cast aluminum housing. Multifunctional adjustable spigot. Application: outdoor areas. Installation: side-entry mounted (Ø48mm-60mm), surface-mounted (dock not included in package).

Color of housing: Grey

Power factor: 0,95

AC frequency, Hz: 50

Flicker, %: 5

Climatic modification and category of placement: YX/I1

Protection class: I

Suitable for top end size, mm: 48...60

Mounting method: Side-entry

Ingress protection (IP): IP65

Impact resistance: IK08

Color rendering index: 70-79

Nominal voltage, V: 220...230

<https://www.varton.ru/products/ulichnoe-osveshchenie/uragan/uragan-parking-dlya-parkovki/svetodiodnyy-svetilnik-varton-ulichnyy-uragan-parking-500-vt-4000-k-1-10v->


Product data sheet

VARTON - Street lighting

nema/



Site 1

Luminaire layout plan

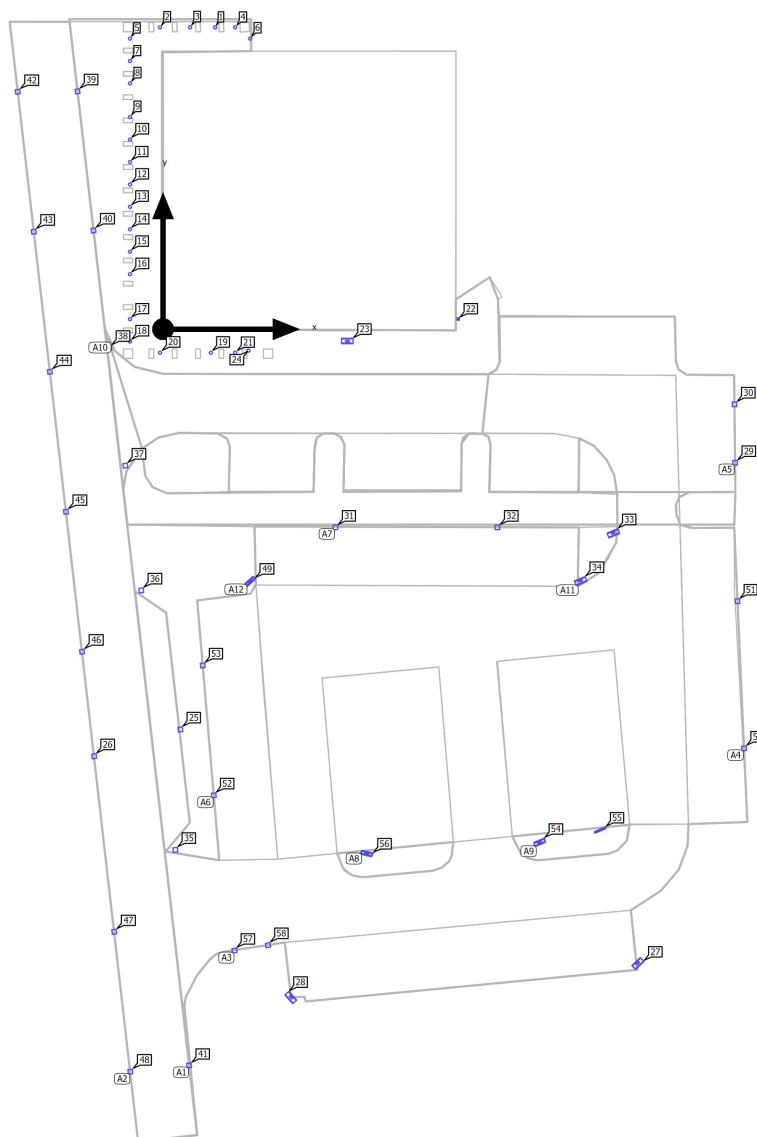

Site 1

Luminaire layout plan



Manufacturer	Current	P	307.0 W
Article No.	-	$\Phi_{\text{Luminaire}}$	5465 lm
Article name	ALT3-168L-305-AM-5W-HDL		
Fitting	1x C-70-CRI WITH DIFFUSE LENS DATA SHOWN IS ABSOLUTE Educational, Government, Healthcare, Hospitality, Hotel, Industrial, Institutional, Manufacturing, Pathway, Prison, Roadway, Site, Sports, Street, Direct, Wet Location		

7 x Current ALT3-168L-305-AM-5W-HDL

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	1.059 m / -44.647 m / 3.900 m	1.059 m	-44.647 m	3.900 m	35
X-direction	8 pcs., Centre - centre, Distances not equal	-1.866 m	-22.400 m	4.000 m	36
		-3.233 m	-11.700 m	4.000 m	37
Arrangement	A1	-4.600 m	-1.600 m	4.000 m	38
		-7.334 m	20.397 m	4.000 m	39
		-5.967 m	8.465 m	4.000 m	40
		2.235 m	-63.125 m	4.000 m	41

Site 1

Luminaire layout plan

7 x Current ALT3-168L-305-AM-5W-HDL

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	-4.183 m / -51.664 m / 4.000 m	-12.460 m	20.361 m	4.000 m	42
X-direction	8 pcs., Centre - centre, Distances not equal	-11.081 m	8.357 m	4.000 m	43
		-9.701 m	-3.647 m	4.000 m	44
Arrangement	A2	-8.322 m	-15.651 m	4.000 m	45
		-6.942 m	-27.656 m	4.000 m	46
		-4.183 m	-51.664 m	4.000 m	47
		-2.804 m	-63.668 m	4.000 m	48

2 x Current ALT3-168L-305-AM-5W-HDL

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	6.127 m / -53.283 m / 4.000 m	6.127 m	-53.283 m	4.000 m	57
X-direction	2 pcs., Centre - centre, 2.912 m	9.002 m	-52.818 m	4.000 m	58
Arrangement	A3				

2 x Current ALT3-168L-305-AM-5W-HDL

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	49.818 m / -35.945 m / 4.000 m	49.818 m	-35.945 m	4.000 m	50
X-direction	2 pcs., Centre - centre, 12.631 m	49.257 m	-23.326 m	4.000 m	51
Arrangement	A4				

Site 1

Luminaire layout plan

2 x Current ALT3-168L-305-AM-5W-HDL

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	49.049 m / -11.452 m / 4.000 m	49.049 m	-11.452 m	4.000 m	29
X-direction	2 pcs., Centre - centre, 5.011 m	48.996 m	-6.441 m	4.000 m	30
Arrangement	A5				

2 x Current ALT3-168L-305-AM-5W-HDL

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	4.348 m / -39.969 m / 4.000 m	4.348 m	-39.969 m	4.000 m	52
X-direction	2 pcs., Centre - centre, 11.181 m	3.401 m	-28.828 m	4.000 m	53
Arrangement	A6				

2 x Current ALT3-168L-305-AM-5W-HDL

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	14.784 m / -16.992 m / 4.000 m	14.784 m	-16.992 m	4.000 m	31
X-direction	2 pcs., Centre - centre, 13.884 m	28.668 m	-16.993 m	4.000 m	32
Arrangement	A7				

Individual luminaires

X	Y	Mounting height	Luminaire
1.488 m	-34.317 m	4.000 m	25


Site 1

Luminaire layout plan

X	Y	Mounting height	Luminaire
-5.912 m	-36.617 m	4.000 m	26

Site 1

Luminaire layout plan




Manufacturer	Leipziger Leuchten GmbH	P	500.0 W
Article No.	9.301.6810.00	$\Phi_{\text{Luminaire}}$	8588 lm
Article name	KSW		
Fitting	1x HALOLINE		

Individual luminaires

X	Y	Mounting height	Luminaire
25.235 m	0.877 m	6.500 m	22

Site 1

Luminaire layout plan



Manufacturer	VARTON	P	120.0 W
Article No.	V1-G1-71443-04L19-661 20XX Frieze 20°	Φ _{Luminaire}	5999 lm
Article name	Architectural light		
Fitting	1x LED		

21 x VARTON Architectural light

Type	Field Arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	-2.832 m / -1.057 m / 3.200 m	4.467 m	25.882 m	3.200 m	1
X-direction	10 pcs., Centre - centre, Distances not equal	-0.257 m	25.882 m	3.200 m	2
		2.318 m	25.882 m	3.200 m	3
Y-direction	30 pcs., Centre - centre, Distances not equal	6.181 m	25.882 m	3.200 m	4
		-2.832 m	24.920 m	3.200 m	5
Arrangement	A10	7.469 m	24.920 m	3.200 m	6
		-2.832 m	22.996 m	3.200 m	7
		-2.832 m	21.071 m	3.200 m	8
		-2.832 m	18.185 m	3.200 m	9
		-2.832 m	16.261 m	3.200 m	10
		-2.832 m	14.337 m	3.200 m	11
		-2.832 m	12.412 m	3.200 m	12
		-2.832 m	10.488 m	3.200 m	13

Site 1

Luminaire layout plan


X	Y	Mounting height	Luminaire
-2.832 m	8.564 m	3.200 m	14
-2.832 m	6.640 m	3.200 m	15
-2.832 m	4.716 m	3.200 m	16
-2.832 m	0.867 m	3.200 m	17
-2.832 m	-1.057 m	3.200 m	18
4.100 m	-2.019 m	3.200 m	19
-0.257 m	-2.019 m	3.200 m	20
6.181 m	-2.019 m	3.200 m	21

Individual luminaires

X	Y	Mounting height	Luminaire
7.334 m	-1.834 m	3.200 m	24

Site 1

Luminaire layout plan



Manufacturer	VARTON	P	500.0 W
Article No.	V1-S1-H0704-40U24-65500 40 Uragan Parking 500W 4000K NEMA	$\Phi_{\text{Luminaire}}$	67119 lm
Article name	Street lighting		
Fitting	1x LED		

1 x VARTON Street lighting

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	17.463 m / -44.918 m / 7.493 m	17.463 m	-44.918 m	7.493 m	56
X-direction	2 pcs., Centre - centre, Distances not equal				
Arrangement	A8				

2 x VARTON Street lighting

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	35.800 m / -21.575 m / 5.962 m	38.600 m	-17.475 m	6.038 m	33
X-direction	2 pcs., Centre - centre, Distances not equal	35.800 m	-21.575 m	5.962 m	34
Arrangement	A11				

Site 1

Luminaire layout plan

1 x VARTON Street lighting

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	7.484 m / -21.671 m / 5.891 m	7.484 m	-21.671 m	5.891 m	49
X-direction	2 pcs., Centre - centre, Distances not equal				
Arrangement	A12				

2 x VARTON Street lighting

Type	Line arrangement	X	Y	Mounting height	Luminaire
1st luminaire (X/Y/Z)	37.477 m / -42.899 m / 6.900 m	32.268 m	-43.972 m	7.681 m	54
X-direction	2 pcs., Centre - centre, Distances not equal	37.477 m	-42.899 m	6.900 m	55
Arrangement	A9				

Individual luminaires

X	Y	Mounting height	Luminaire
15.800 m	-1.037 m	13.500 m	23
40.711 m	-54.370 m	4.000 m	27
10.974 m	-57.290 m	4.000 m	28