

# SHENZHEN BEST SPECIAL DISPLAY TECHNOLOGY CO.,LTD



**深圳贝斯特专显科技有限公司**  
SHENZHEN BEST SPECIAL DISPLAY TECHNOLOGY CO.,LTD

Add:Room 308A, Building A2 , Songbai Zhongchuanghui, Gongming East Ring Avenue, Matian Street, Guangming District, Shenzhen City, Guangdong Province China

Web: <https://www.bestsdt.com>

Contact: Nana

Email:[nana@bestsdt.com](mailto:nana@bestsdt.com)

Tel: 86-13526873353



# Specification for lectern windows os

## Product Feature



\*Support High resolution content file;

\* Support Information Publishing System;

\* Support Vertical and Horizontal;

\*Network configuration: Fixed IP, DHCP or Domain.

\*RJ45 and Wireless internet access;

\*Language: Chinese, English, other language is available if required;

\*Extended function: multi touch feature, adding printer, scanner, barcode reader, pos machine etc.

## Product Show




Panel Parameter	
Top screen	23.6inch
Aspect Ratio	16:9
Resolution	1920x1080
Color	8Bit,16.7M
Brightness (nits)	300 cd/ m
Contrast	3000:1
Visual angle (H/V)	178。 /178。




### PC configuration ( for top 23.6inch screen)

OS	Windows 10
CPU	Intel i5
RAM	4GB
SSD	128GB
WIFI	WIFI Module+WIFI Antenna
Interface	HDMI*1, VGA*1, USB2.0*2, USB3.0*2, RJ45, SIM slot*1

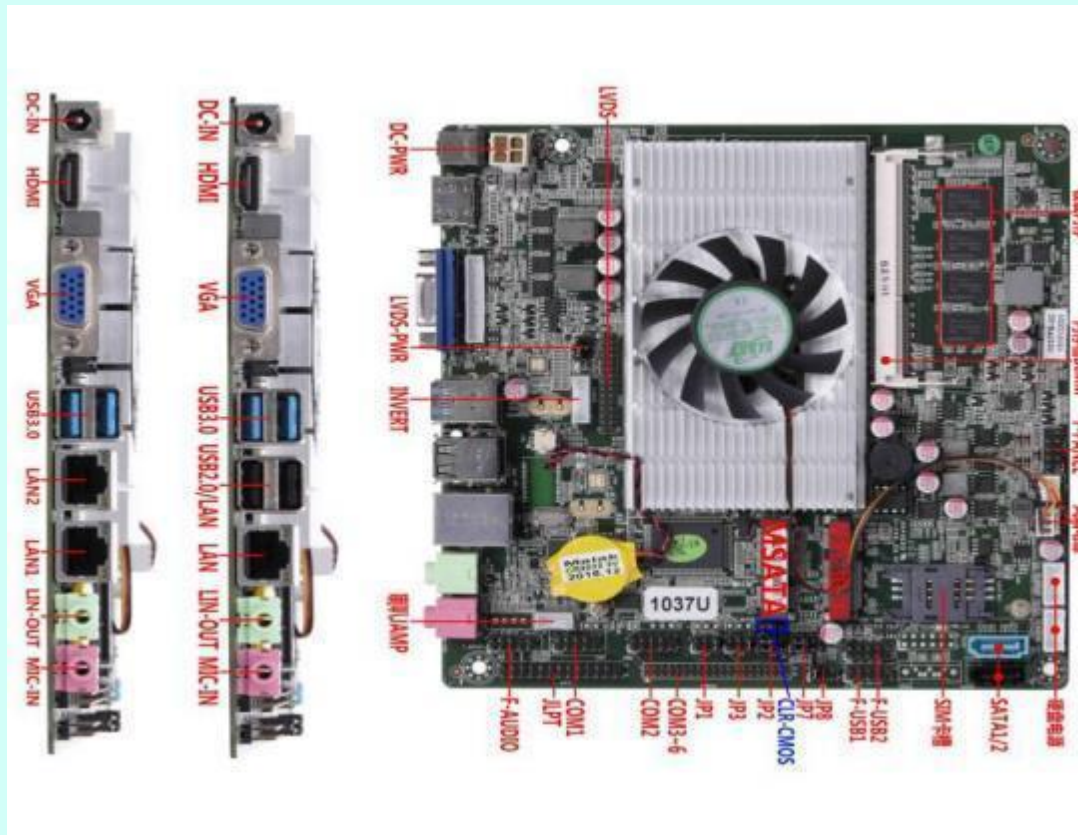

## Touchscreen ( for top 23.6 inch screen)

Touch technology	Capacitive touch
Position accuracy	Approximately 3 mm absolute, 1 mm relative. No drift
Alignment	Software drivers provide a calibration facility
Speed of response	5ms
Sensitivity	It can be programmed for different thickness of glass and even use with gloved hands.
	Standard configuration functions with non-metal.
	single construction glass 16mm thick. Double glazing option up to 25mm available

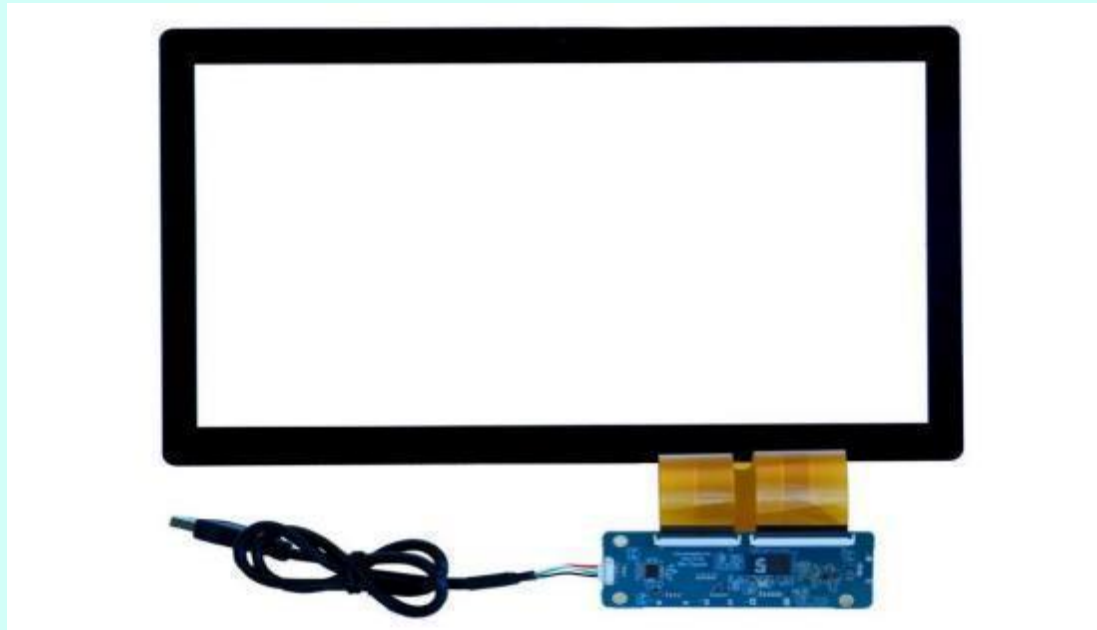

Other Hardware	
Surface	Toughened glass
Frame	Aluminium alloy
Back cover	Metal shell
Speaker	2*5W speakers inside
Power input	AC110~240V
Power in standby	≤3W
Power in working	30W-180W
Operation temperature	-20°C-60°C