



Drive By Wire Throttle Wiring

Drive by wire technology is supported by the Elite 2500 ECU's and requires wiring of an Electronic Throttle and Accelerator Pedal Position sensor. Wiring setup and connection allocation can be found within the function in the setup page. This wiring connection allocation below is recommended as a standard practice but can be changed if required by your application or needs. Please note that only AVI inputs 1 to 8 can be used for Drive by Wire input signals.

[Drive by wire setup information](#)

Drive By Wire ?

Wiring

Calibration

NOTE


The connections listed below must be allocated before this function will operate correctly.

Connections



Drive By Wire TPS 1 Input		A16	AVI2 Edit Connection	Switch On Voltage 2.00	Switch Off Voltage 1.00	Pull Up Disable ▼
Drive By Wire TPS 2 Input		A17	AVI3 Edit Connection	Switch On Voltage 2.00	Switch Off Voltage 1.00	Pull Up Disable ▼
Drive By Wire APP 1 Input		A2	AVI4 Edit Connection	Switch On Voltage 2.00	Switch Off Voltage 1.00	Pull Up Disable ▼
Drive By Wire APP 2 Input		B20	AVI5 Edit Connection	Switch On Voltage 2.00	Switch Off Voltage 1.00	Pull Up Disable ▼
Drive By Wire Motor	 	B25 B26	ECU DBW Motor 1			

Recommended Wiring Configuration, (although AVI Inputs 1 to 8 can be allocated and used if required)

**HALTECH ELITE 2500 / 1500 ECU
34 PIN ECU CONNECTOR (A)**

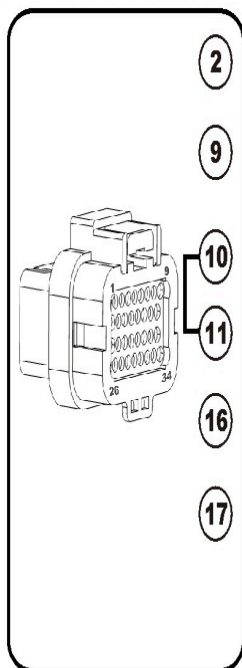

**HALTECH ELITE 2500 / 1500 ECU
26 PIN ECU CONNECTOR (B)**

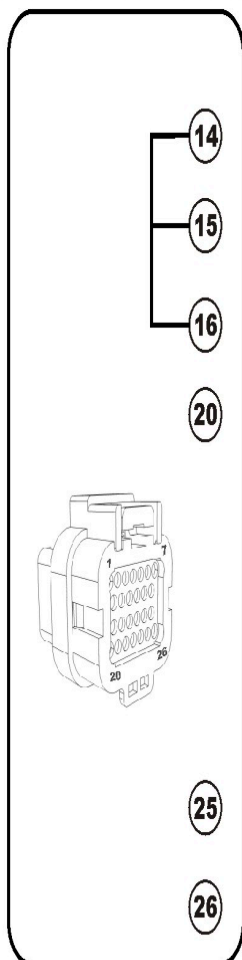

+5V DC

TPS 1

**SIGNAL
GROUND**

+5V DC


TPS 2

**SIGNAL
GROUND**

DBW 1

MOTOR

DBW 2

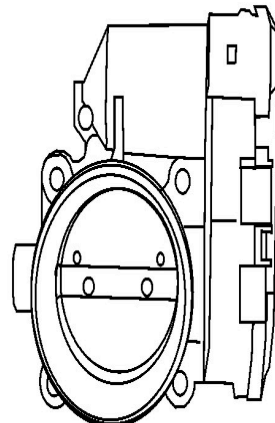

DRIVE BY WIRE THROTTLE

+5V DC


APP 1

**SIGNAL
GROUND**

+5V DC

APP 2

**SIGNAL
GROUND**

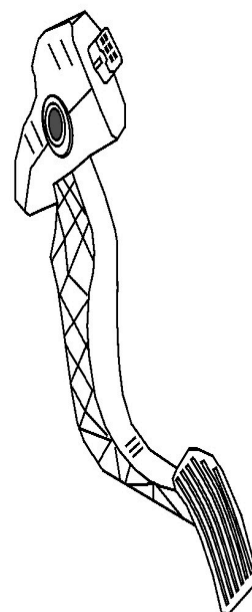

**ACCELERATOR PEDAL
POSITION SENSOR**

